


SOWELL ROAD LLC.
C-2

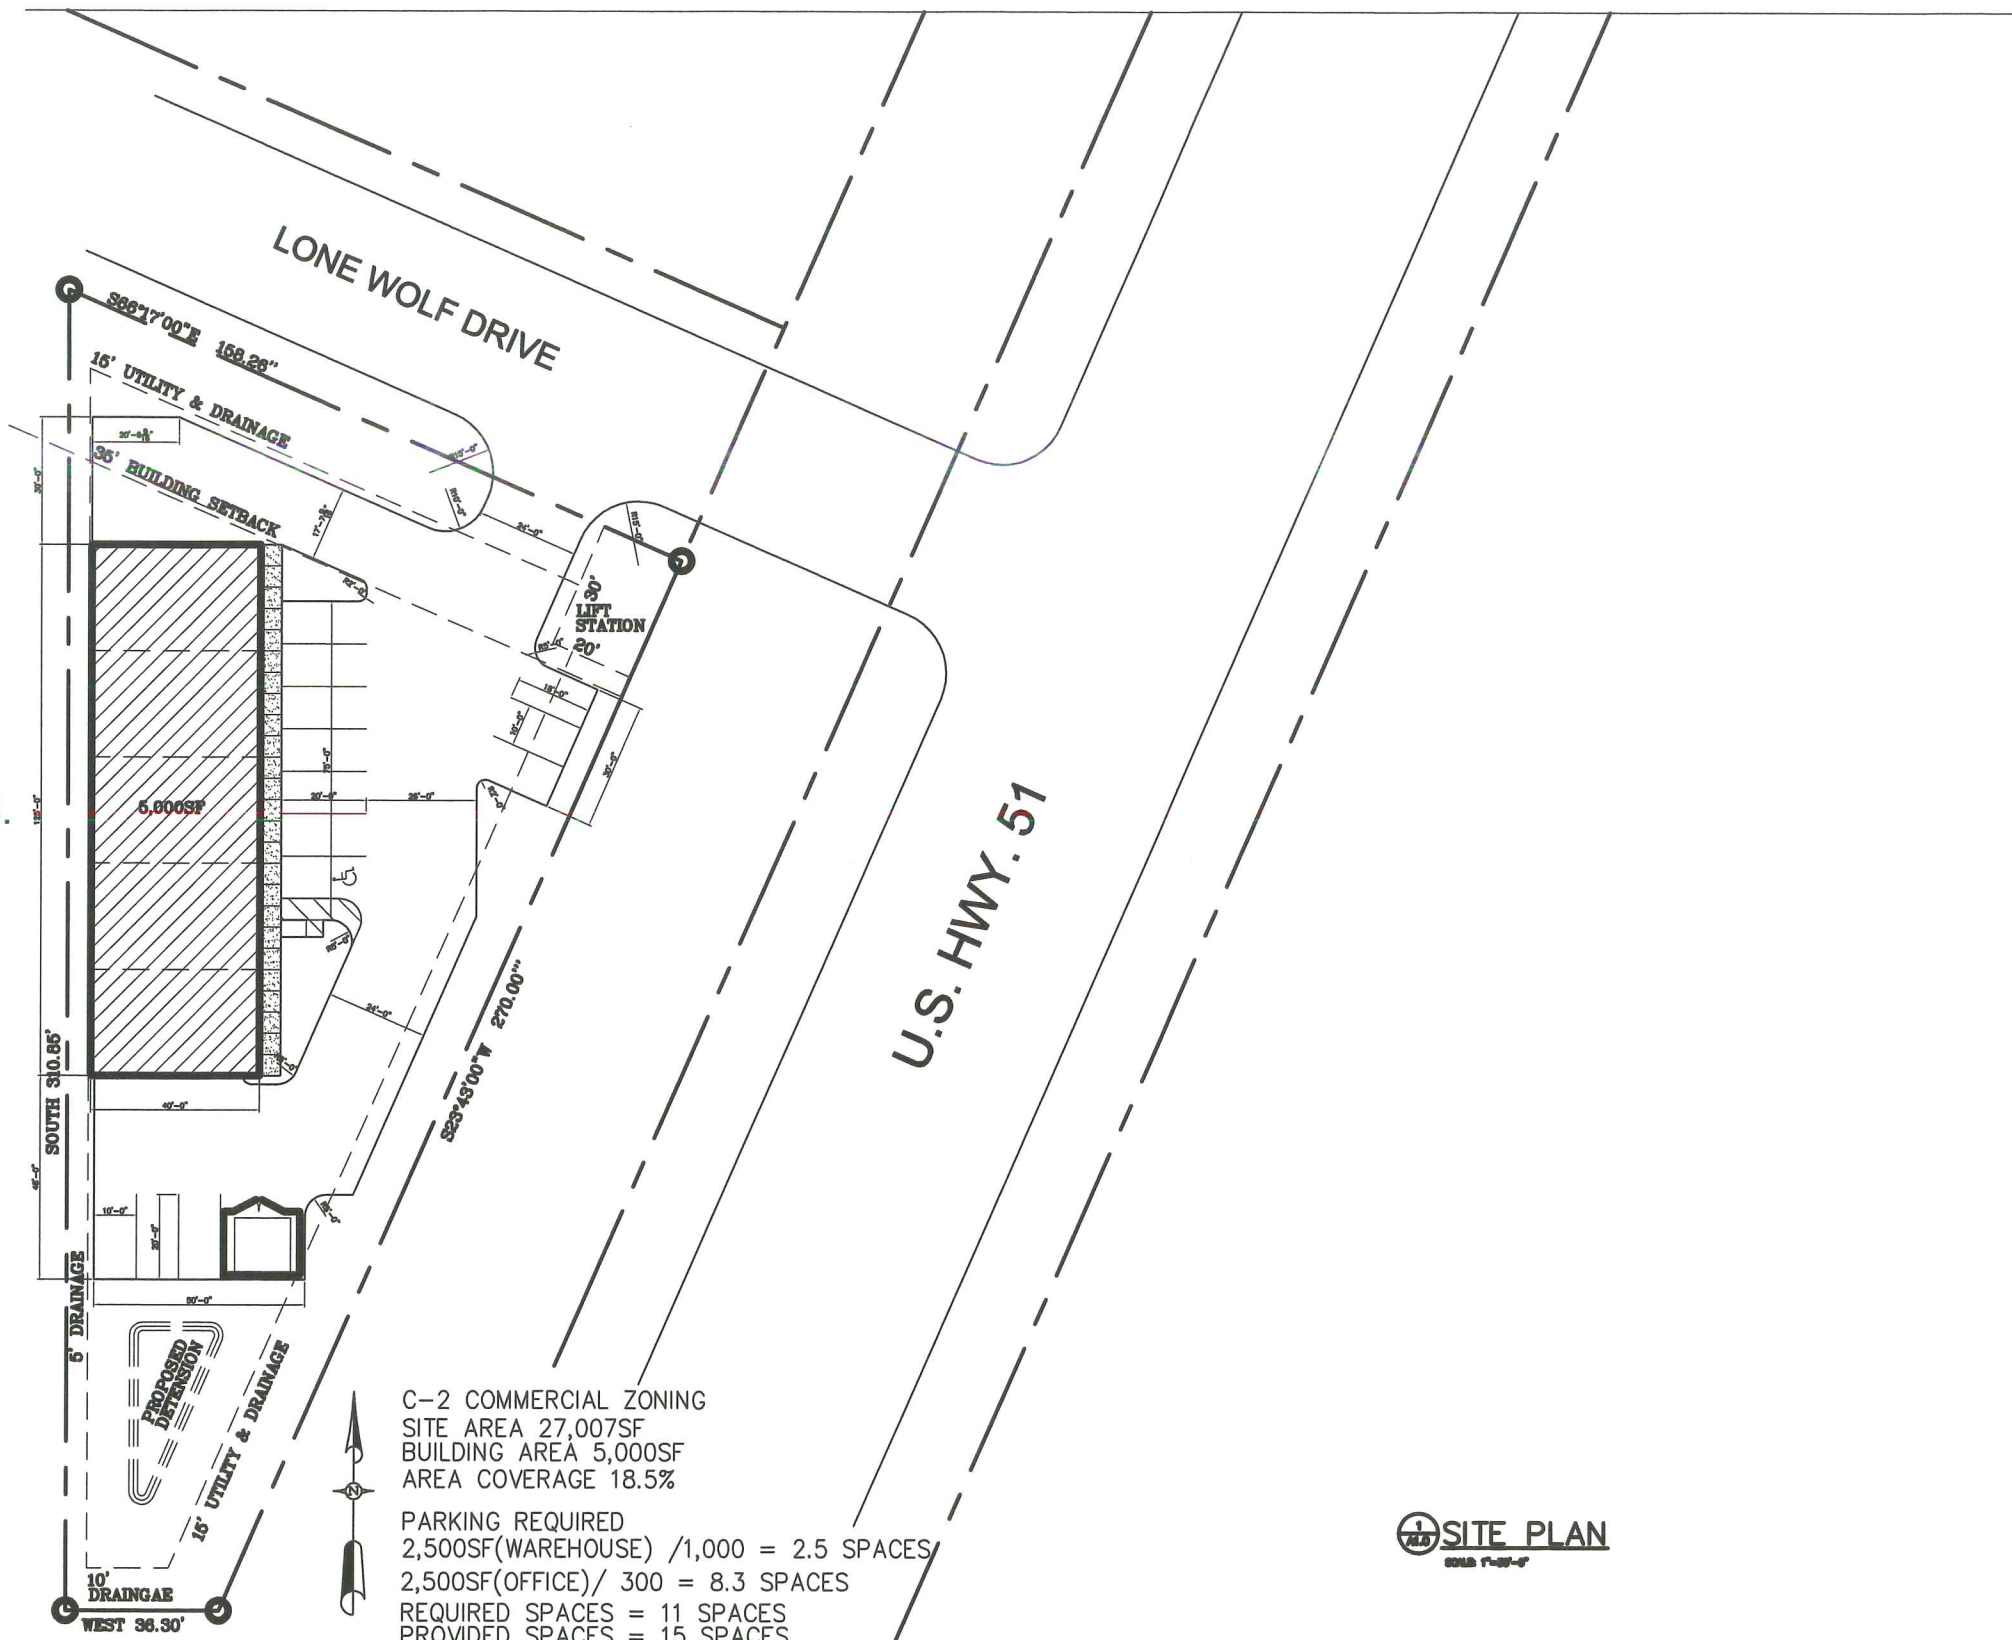


C-2 COMMERCIAL ZONING
 SITE AREA 27,007SF
 BUILDING AREA 5,000SF
 AREA COVERAGE 18.5%

PARKING REQUIRED
 2,500SF(WAREHOUSE) /1,000 = 2.5 SPACES
 2,500SF(OFFICE)/ 300 = 8.3 SPACES
 REQUIRED SPACES = 11 SPACES
 PROVIDED SPACES = 15 SPACES


SITE PLAN
SCALE 1"=30'-0"

REVISIONS	BY




WOODRIDGE & ASSOCIATES
 308 HIGHLAND COUNTY PARKWAY
 RIDGELAND, MS 39157
 601-202-8888
 WWW.WOODRIDGEANDASSOCIATES.COM

Lot 20 Lone Wolf Drive
 Gluckstadt, Mississippi




10/2/19
C1.0

SOWELL ROAD LLC. C-2

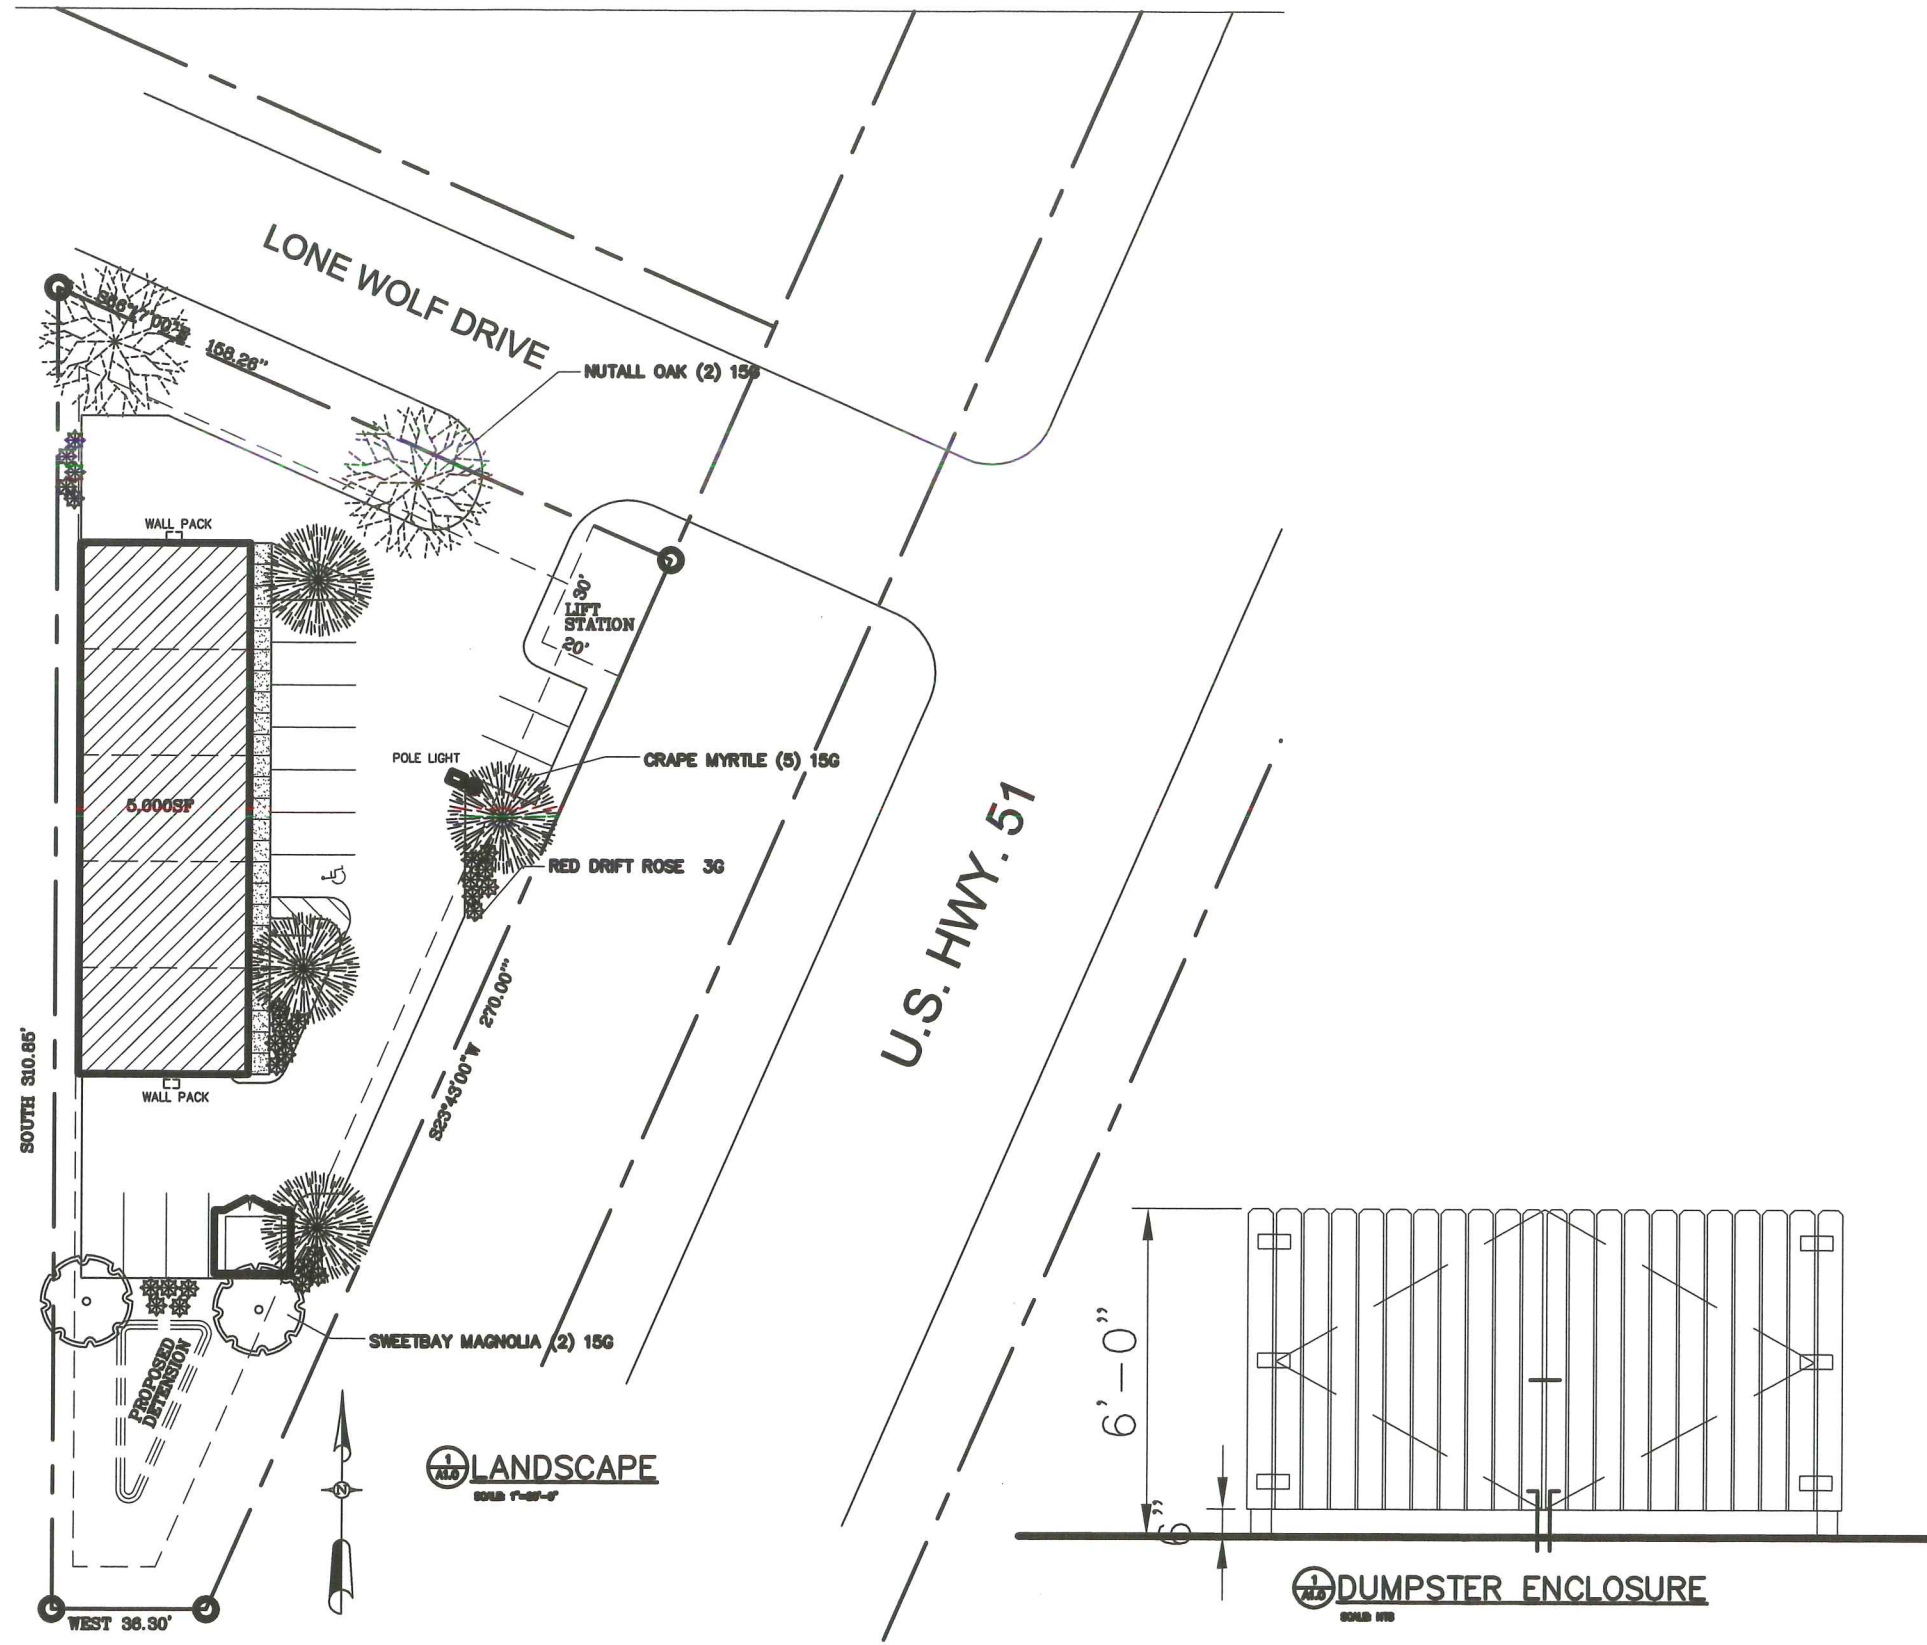

REVISIONS	BY




Lot 20 Lone Wolf Drive
Gluckstadt, Mississippi




10/2/19


L1.0

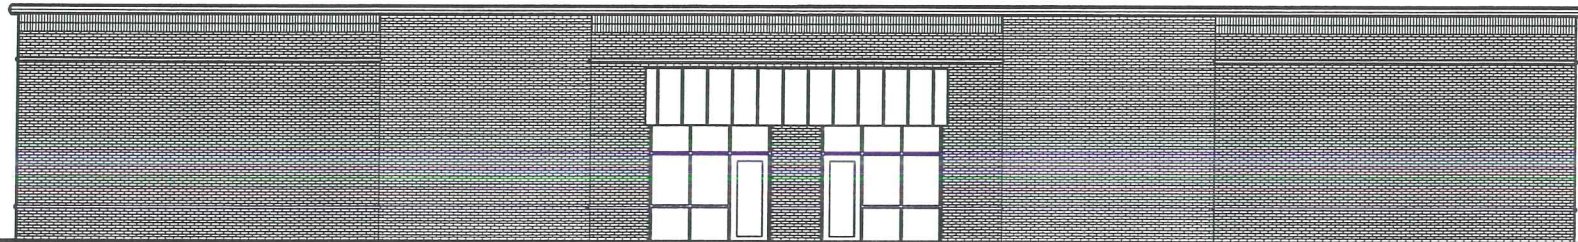


1 EAST ELEVATION (HWY 51 VIEW)
Scale: 1/8"=1'-0"

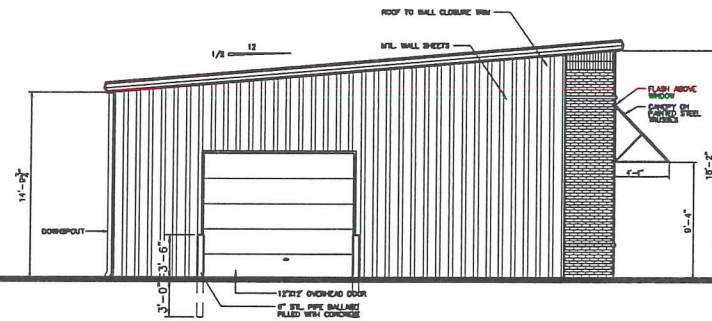

2 SOUTH ELEVATION
Scale: 1/8"=1'-0"

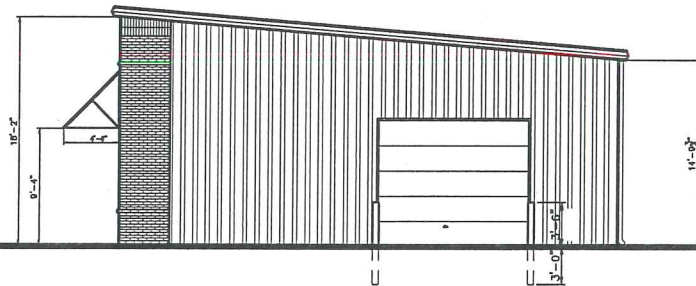

3 NORTH ELEVATION
Scale: 1/8"=1'-0"

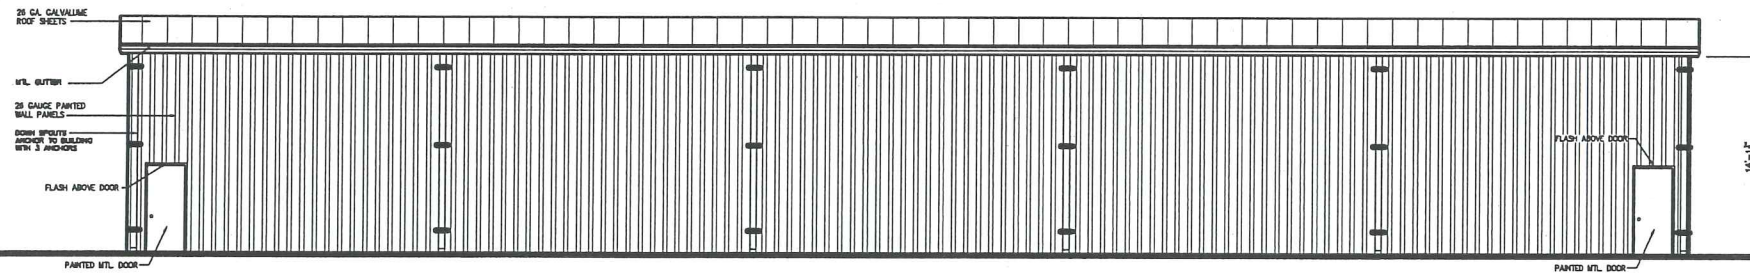

4 WEST ELEVATION
Scale: 1/8"=1'-0"

MAYOR&BOARD.dwg

6/15/2001 9:21 AM


Woodridge & Associates

REVISIONS	BY



WOODRIDGE & ASSOCIATES
10000 GOLF COURSE
HOUSTON, TX 77057
501-808-8880


Lot 20 Lone Wolf Drive
Gluckstadt, Mississippi



3/12/19
A3.0



HOME // PRODUCTS // CONTRACTOR SELECT TWR LED WALL PACK

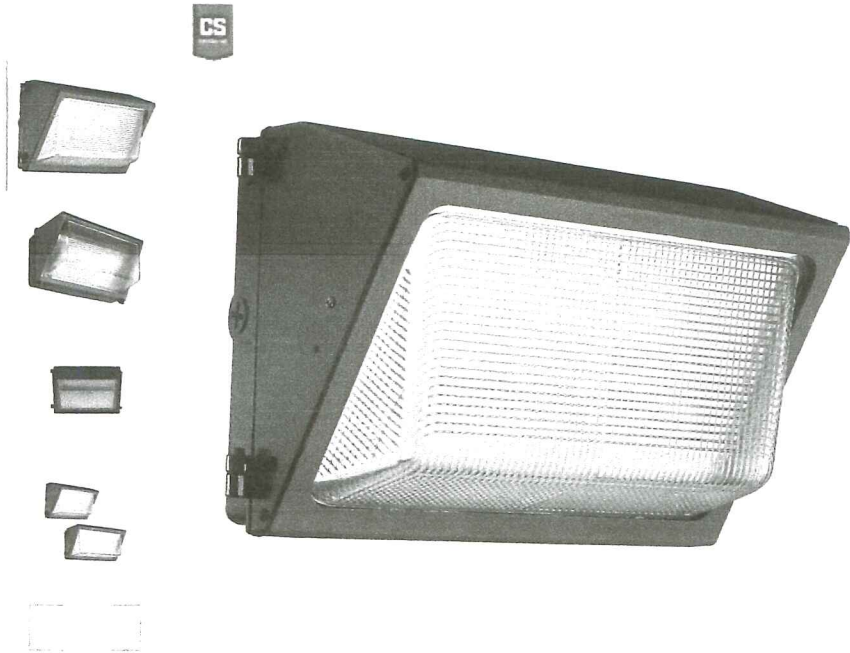

Contractor Select TWR LED Wall Pack

SHARE

Most popular and readily available TWR configurations for your everyday lighting needs

by [Lithonia Lighting](#)



Cast in a traditional dayform, the TWR1/TWR2 LED luminaires offer a popular, classic appearance with energy-efficient LED technology. TWR LED wall packs are ideal for outdoor applications such as carports, loading areas driveways and parking areas. TWR1 is now also available with adjustable lumen output technology. With eight output settings, the TWR allows you to use a single wall pack when replacing 50W - 250W HID.

Feedback

Compare

Spec Sheets



DOCUMENT TITLE

DOWNLOAD

EMAIL

Contractor Select TWR LED.pdf

[VIEW](#)

DOWNLOAD

EMAIL

DOWNLOAD SELECTED

EMAIL SELECTED

Photometry & BIM



Specifications



Brand	Lithonia Lighting	Lumen Output	1000 LM 2000 LM 3000 LM 4000 LM 5000 LM 6000 LM 8000 LM 9000 LM 10,000 LM
Color	Bronze	Mounting Type	Surface
Correlated Color Temperature	4000 K 5000 K		

BRANDS

LIGHTING

- [Aculux](#)
- [American Electric Lighting](#)
- [Antique Street Lamps](#)
- [Gotham Lighting](#)
- [Healthcare Lighting](#)

AYI (NYSE) \$124.64

- [Hydrel](#)
- [Indy](#)
- [Juno](#)
- [Lithonia Lighting](#)
- [Mark Architectural Lighting](#)
- [Peerless Lighting](#)

PRODUCTS

INDOOR

RESIDENTIAL

INDUSTRIAL

[How to Buy](#) [Investors](#) [About Us](#) [Social](#) [Login](#)



What are you shopping for?



Log In Orders & Returns -



Shop All Departments Bathroom Kitchen Lighting Fans Hardware Appliances Decor Outdoor HVAC Flooring Commercial Clearance

Home Goals Kitchen & Bath Sale

Build.com Credit Card

FREE Standard Ground Shipping on Orders over \$49



E-180-5-BZ


Item # bci2860656

Progress Lighting PCPAE-180-5-BZ LED Parking Lot Light - 181W - IES Type 5 Distribution

Write a Review

\$939.93

Finish: Bronze

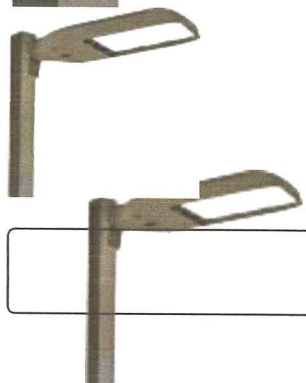

Bronze
\$939.93
148 In Stock
Leaves the Warehouse by Monday, June 24th

Select

Free Shipping!

Leaves the Warehouse by Monday, June 24th (Change Zip)

148 In Stock

- 1 +

Add to Cart

Add to Project

Compare



Buy Now, Take 12 Months to Pay On orders of \$1,000 or more
With the Build.com Credit Card
Apply Now

Customers Also Viewed

Progress Lighting PCPAE-180-3-BZ (0)
Starting at \$969.00

MaxLite AR-XAL450UT4-50 (0)
Starting at \$1,057.35

Lumark NFFLD-L-C75-T (0)
Starting at \$1,200.77

MaxLite AR-XAL450UT3-50 (0)
Starting at \$1,057.35

Lumark NFFLD-L-C75-S (0)
Starting at \$1,200.77

MaxLite AR-XAL450UT5-50 (0)
Starting at \$1,057.35

Overview Reviews Product Q&A 1


Product Overview

Features:

- TGIC thermoset polyester powder paint
- Die-cast and extruded aluminum with vertical finning for maximum thermal management. Electrical and optical components are separated to provide increased thermal management. EPA = 0.74 ft²
- Specially designed acrylic LED lenses for IES Type 5 distribution. Lens optics are rotatable and interchangeable in field. LEDs are 4000K/70 CRI and optical assembly in IP65 rated. Fixture allows zero uplight.
- UL rated for wet locations
- Highly efficient LEDs produce little heat and have an extremely long lifespan
- Made of aluminum
- 5 year limited warranty
- -40°F to 104°F operating temperature
- Certifications: UL-1598, C22.2, C250.0-24, ANSI 3G

Dimensions:

- Height: 6"
- Length: 26 3/5"
- Width: 11 2/3"

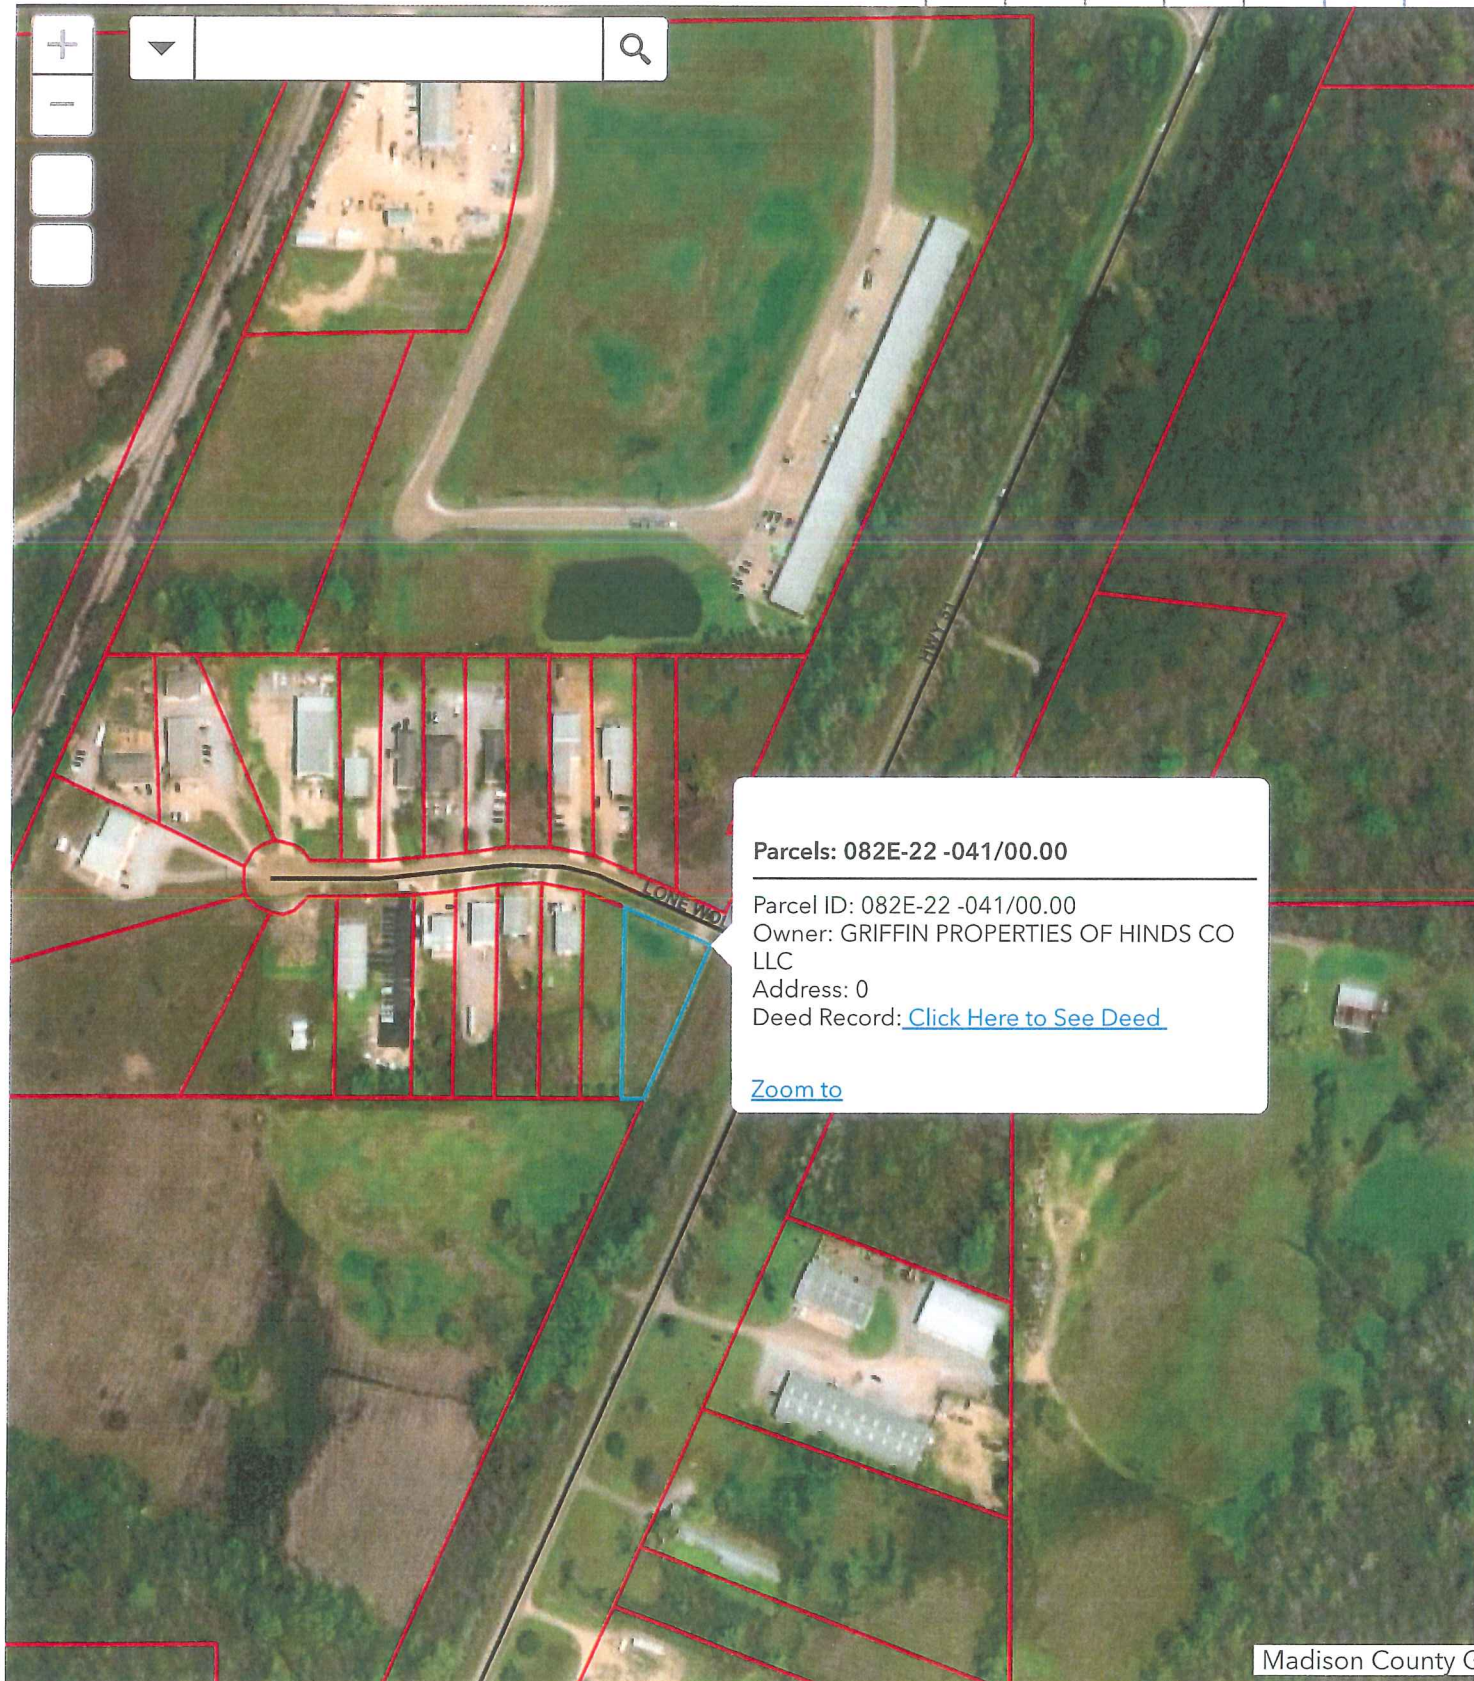

Parcels: 082E-22 -041/00.00

Parcel ID: 082E-22 -041/00.00
Owner: GRIFFIN PROPERTIES OF HINDS CO LLC
Address: 0
Deed Record: [Click Here to See Deed](#)

[Zoom to](#)

300ft
-90.076 32.526 Degrees