

Department of Engineering  
Tim Bryan, P.E., County Engineer

3137 South Liberty Street, Canton, MS 39046  
Office (601) 790-2525 FAX (601) 859-3430

**MEMORANDUM**

July 15, 2021

To: Sheila Jones, Supervisor, District I  
Trey Baxter, Supervisor, District II  
Gerald Steen, Supervisor, District III  
Karl Banks, Supervisor, District IV  
Paul Griffin, Supervisor, District V

From: Tim Bryan, P.E., PTOE  
County Engineer

Re: Telepak Networks, Inc./D.B.A. Cspire Utility Permit  
County Road Name, Yandell Road-Grace Crossing Church

The Engineering Department recommends approval of permit application for Telepak Networks, Inc./D.B.A. Cspire proposes a directional bore to install fiber optic cable servicing Grace Crossing Church, along and across Yandell Road onto private property.

SHEILA JONES  
District One

TREY BAXTER  
District Two

GERALD STEEN  
District Three

KARL BANKS  
District Four

PAUL GRIFFIN  
District Five

Revised: 2/14/2019



PERMIT APPLICATION FOR THE CONSTRUCTION OR ADJUSTMENT OF A UTILITY WITHIN COUNTY ROAD RIGHT-OF-WAY

Utility Information: Utility Name: Telepak Networks, Inc - dba Cspire
Address: 1018 Highland Col. Pkwy City/State/Zip: Ridgeland, MS 39152
Contact Person: Jennifer Aaron Childs Contact's Phone: 601.624.7639

Project Information: County Road Name: Yandell Rd.
(If located within more than one road right-of-way, use Appendix 1 for additional descriptions)

Beginning Location: Yandell Rd. Ending Location: Private Property

Length of Project: 59 Lft. Section: 34 Township: 3 Range: 69

Description of Work: Cspire proposes a directional bore to install fiber optic cable, servicing Grace Crossing Church, along and across Yandell Rd. onto private property

Check Box if Appendix 1 is to be included as a part of this Application

Whereas the above stated Utility makes application to the Madison County Board of Supervisors for a Construction Permit. Attached hereto are drawings and plans for the construction of the above facilities located within Madison County owned public rights-of-way. Once stamped by the Madison County Engineering Department, these plans shall not be changed or altered without written approval of the County Engineer, or his representative. A copy of the approved permit and plans shall be on-site at all times during construction.

The Applicant Utility shall comply with all policies, procedures and construction practices as outlined in A Policy for The Accommodation of Utility Facilities within the Right-of-Way of all Public County Roads (hereinafter referred to as the "Policy"), as adopted on November 1, 2005, by the Madison County Board of Supervisors, and which is hereby made a part of this Application Agreement.

If facilities are to be located within the Rights-of-Way of the County-Federal or State Aid System, Applicant Utility also agrees to comply with applicable provisions of S.O.P. No. SA II-2-8, Accommodation of Utilities on Rights-of-Way, issued by the State Aid Engineer and dated July 1, 2005.

The Applicant Utility understands and agrees that, except as herein granted, no right, title, claim, or easement to said road right-of-way is granted by the issuance of this permit. If this Utility is listed in the general provisions of the Policy, it will be adjusted to comply with same without cost to the County, unless the variance from the Policy has been approved by the granting of the Permit pursuant to this Application.

The Applicant Utility further understands that the Utility's engineering, plant, or other personnel will be responsible for the staking and construction supervision of the work set out above and as shown on the attached plans. If work impacts traffic in any way, the appropriate traffic control shall be installed per the Manual of Uniform Traffic Control Devices, Latest Edition.

The Applicant Utility understands that the County Engineer, or his representative, may issue a Stop Work Order at any time if it is deemed that site conditions are not suitable for construction or if any of the requirements of this permit are not being met.

Many County Roads have variable Rights-of-Way and/or no Right-of-Way at all and are maintained under a Prescriptive Easement. It is the sole responsibility of the Applicant Utility to verify the existence and limits of public rights-of-way. If none exists, it is the

responsibility of the Applicant Utility to acquire an easement for their Facilities from the applicable property owner(s). Madison County in no way verifies the limits of Right-of-Way as shown on the permit application.

The Applicant Utility shall be responsible for all future maintenance and repair of the facilities installed under this permit. The Applicant Utility shall make future adjustments to, or relocate, the facilities located within road or highway right-of-way when required for road or highway widening or other road or highway construction at no cost to Madison County. The Applicant Utility shall relocate said utilities within sixty (60) days of notification by County by registered mail, return receipt requested, unless otherwise designated by the County Engineer. Further, any maintenance, repair, or construction shall be done in such a manner as to occasion no unreasonable interference with the normal flow and safety to traffic and at the expense of the utility company. When reasonable care has been taken to locate said utility facilities within the right-of-way, the Applicant Utility understands that any damages caused by routine maintenance and construction by County forces shall be borne by the Applicant Utility.

The Applicant Utility further agrees to indemnify and hold Madison County harmless for any and all claims, accidents, damages, liabilities and expenses occasioned wholly, or in part, by any act or omission of applicant, its agents or employees. In case County shall, without fault on its own part, be made a party to any litigation commenced by or against applicant, then applicant shall protect and hold County harmless, and shall pay all costs, expenses and reasonable attorney's fees incurred or paid by County in connection with said litigation.

All underground facilities shall be installed at a depth equal to or greater than 48" below the lowest adjacent grade.

All pipes carrying liquid shall be encased under County maintained roads.

WITNESS the signature of the Applicant this the 14th day of July, 2021.

By: Jennifer Caron Childs  
(Applicant Signature)

Title: O&P Permit Specialist

**Note:** Applicant must be an employee of the Utility named in this application. The Madison County Board of Supervisors will not recognize a Contractor, Subcontractor, Agent, or Consulting Engineer as the Applicant. Utility Company shall be fully responsible for all work performed under this application.

I, or my authorized representative, have reviewed this application and determined that the drawing, sketches, and plans submitted by the Applicant meet the requirements of A Policy for The Accommodation of Utility Facilities within the Right-of-Way of all Public County Roads.

**APPROVED**  
By timothy.bryan at 8:19 am, Jul 27, 2021  
County Engineer

AGREED TO AND APPROVED BY:

\_\_\_\_\_  
Madison County Board President

Date: \_\_\_\_\_

ENTERED INTO THE MINUTES OF THE BOARD OF SUPERVISORS OF MADISON COUNTY, MISSISSIPPI ON THIS \_\_\_\_\_ DAY OF \_\_\_\_\_, 20\_\_\_\_\_.



## Appendix 1

County Road Name: \_\_\_\_\_

Beginning Location: \_\_\_\_\_ Ending Location: \_\_\_\_\_

Length of Project: \_\_\_\_\_ Section: \_\_\_\_\_ Township: \_\_\_\_\_ Range: \_\_\_\_\_

Description of Work: \_\_\_\_\_

\_\_\_\_\_

County Road Name: \_\_\_\_\_

Beginning Location: \_\_\_\_\_ Ending Location: \_\_\_\_\_

Length of Project: \_\_\_\_\_ Section: \_\_\_\_\_ Township: \_\_\_\_\_ Range: \_\_\_\_\_

Description of Work: \_\_\_\_\_

\_\_\_\_\_

County Road Name: \_\_\_\_\_

Beginning Location: \_\_\_\_\_ Ending Location: \_\_\_\_\_

Length of Project: \_\_\_\_\_ Section: \_\_\_\_\_ Township: \_\_\_\_\_ Range: \_\_\_\_\_

Description of Work: \_\_\_\_\_

\_\_\_\_\_

County Road Name: \_\_\_\_\_

Beginning Location: \_\_\_\_\_ Ending Location: \_\_\_\_\_

Length of Project: \_\_\_\_\_ Section: \_\_\_\_\_ Township: \_\_\_\_\_ Range: \_\_\_\_\_

Description of Work: \_\_\_\_\_

\_\_\_\_\_


County Road Name: \_\_\_\_\_

Beginning Location: \_\_\_\_\_ Ending Location: \_\_\_\_\_

Length of Project: \_\_\_\_\_ Section: \_\_\_\_\_ Township: \_\_\_\_\_ Range: \_\_\_\_\_


Description of Work: \_\_\_\_\_

\_\_\_\_\_

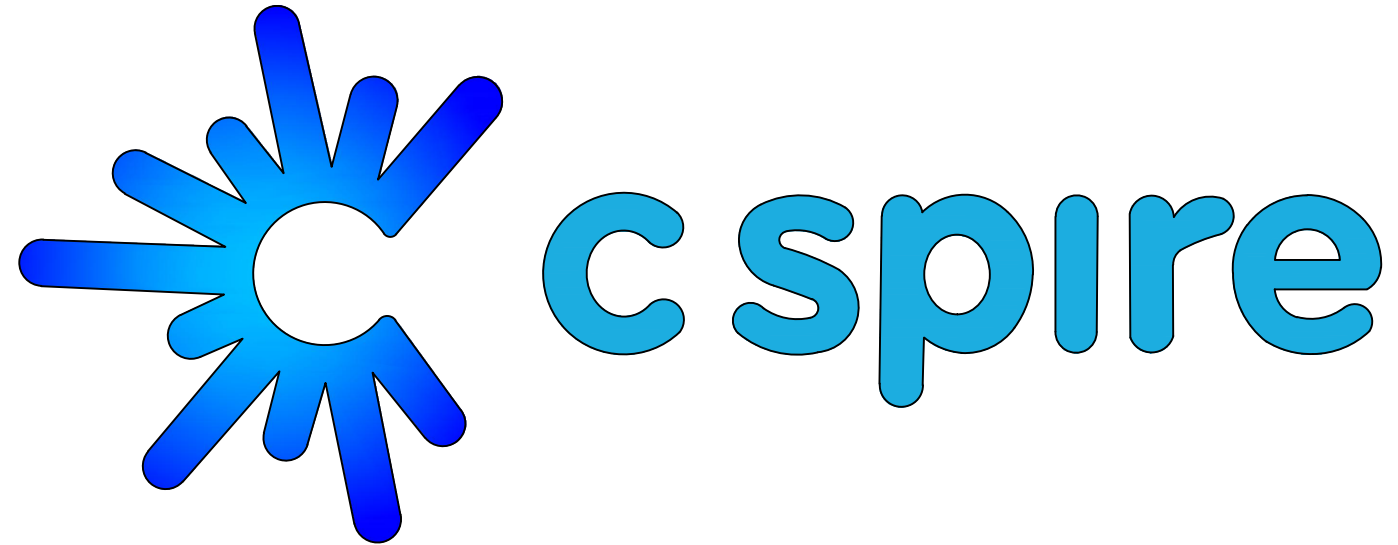

ASBUILT INFORMATION

FIELD ENGINEER:           NAME: \_\_\_\_\_  
PROJECT MANAGER:        NAME: \_\_\_\_\_  
CONSTRUCTION:            NAME: \_\_\_\_\_  
SUB CONTRACTOR:         NAME: \_\_\_\_\_  
INSPECTOR:                NAME: \_\_\_\_\_  
                                  PHONE#: \_\_\_\_\_  
  
CONSTRUCTION COMMENCED: DATE: \_\_\_\_\_  
CONSTRUCTION COMPLETED: DATE: \_\_\_\_\_  
FIBER INSTALLED:         DATE: \_\_\_\_\_  
FINAL CLEANUP:           DATE: \_\_\_\_\_

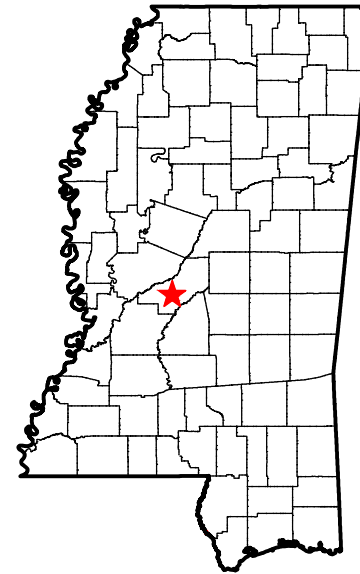

<<	PERMITS	>>
COUNTY :		MADISON, MS

SWO.OSP.63443  
CS.OSFPMS-MADCTY.MS


PROPOSED FIBER BUILD  
GRACE CROSSING BAPTIST CHURCH (CANTON)  
6/6/21

PREPARED BY



43 Town Center Square, Suite 204  
Hattiesburg, MS 39402  
Office phone: (601) 402-9149  
Email: [designservices@bbgeomatics.com](mailto:designservices@bbgeomatics.com)




# ROUTE MAP

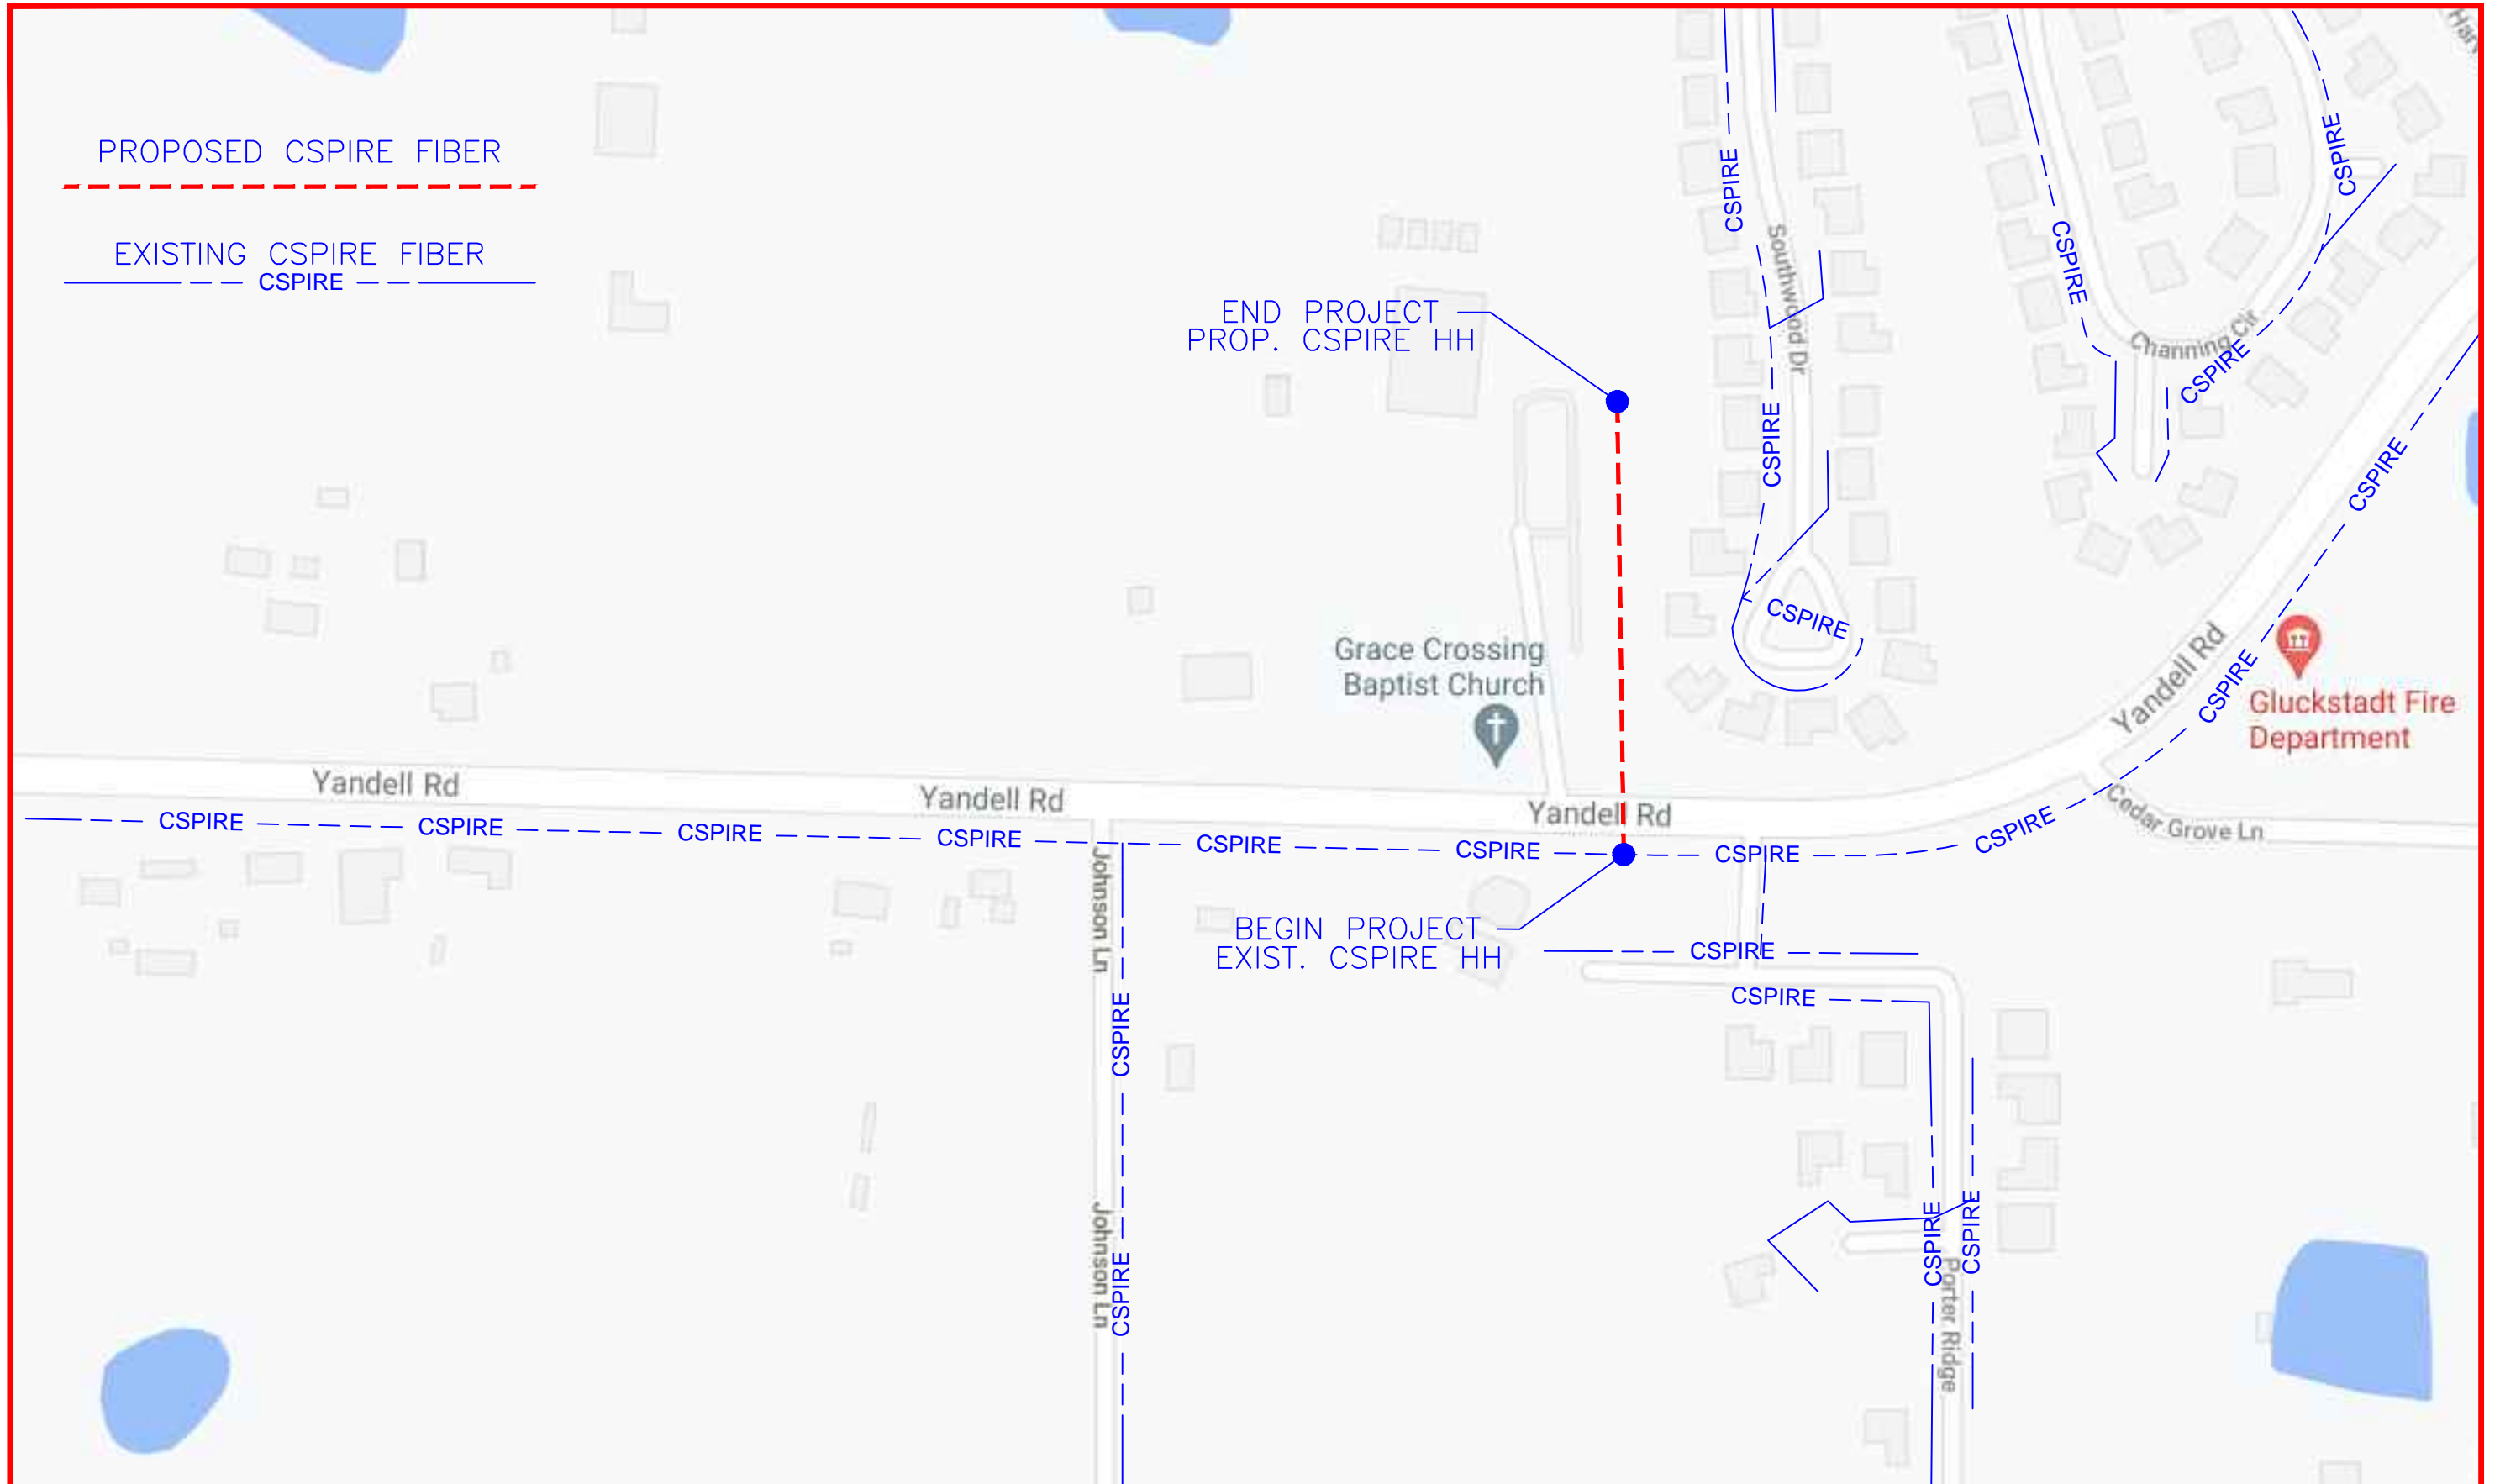

GRACE CROSSING BAPTIST CHURCH (CANTON)



# SYMBOLS KEY

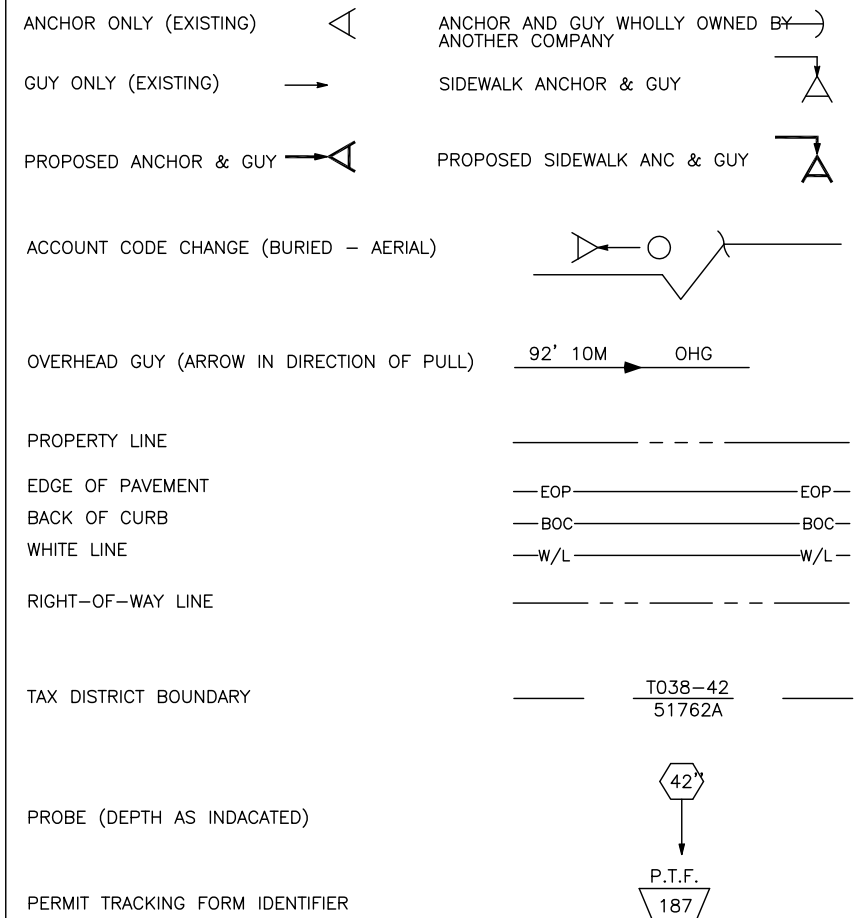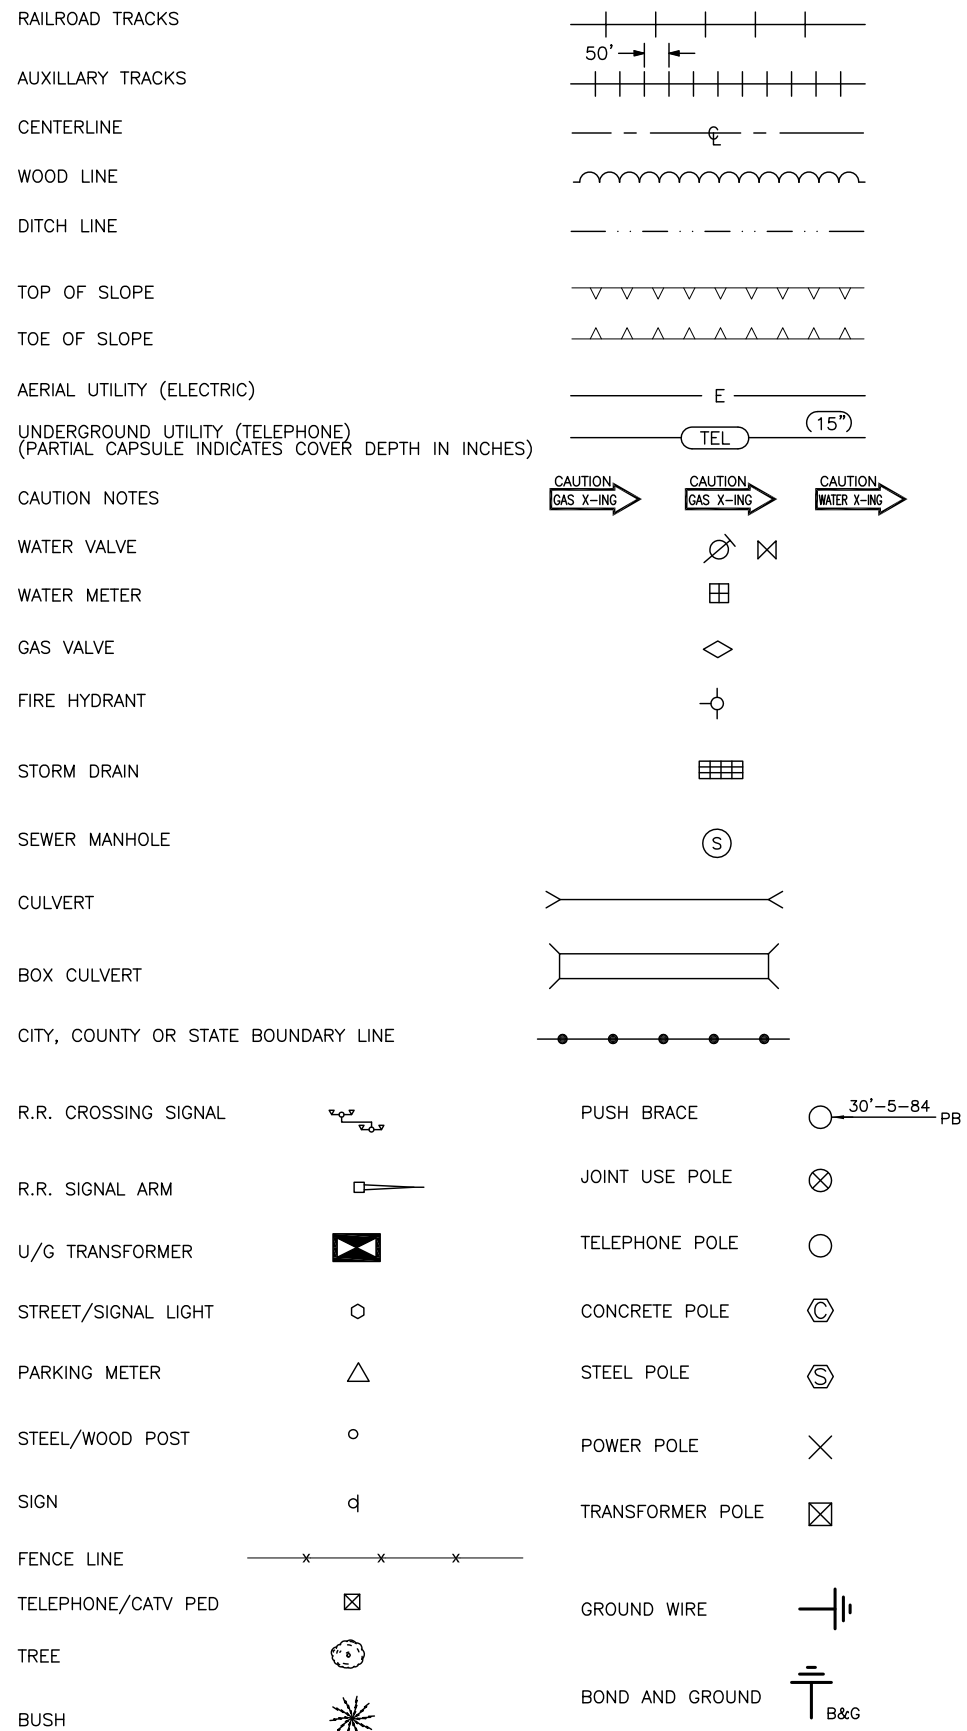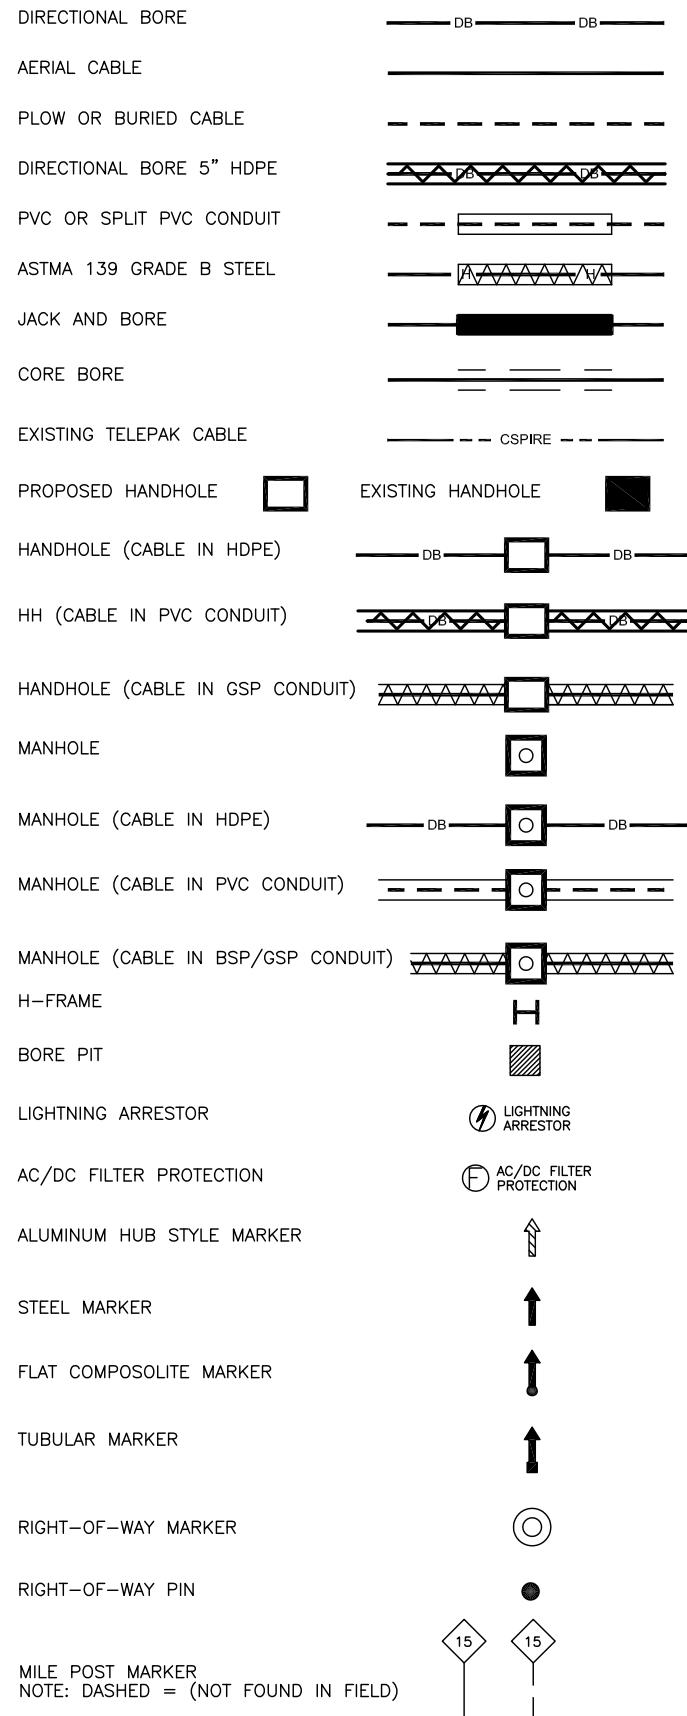

## POLE ATTACHMENT ABBREVIATIONS

PWR	POWER ATTACHMENT	PWR OHG	POWER OVERHEAD GUY
TRI	TRIPLEX	CATV OHG	CATV OVERHEAD GUY
COMM	COMMUNICATIONS ATTACHMENT	CAP BANK	CAPACITOR BANK
CATV	CATV ATTACHMENT	CLTCKT	FIRE ALARM CIRCUIT
SL	STREET LIGHT	PWR DIP	POWER DIP
TSIG	TRAFFIC SIGNAL	COMM DIP	COMMUNICATIONS DIP
MDW	MULTI DROP WIRE	CATV DIP	CATV DIP
COMM OHG	COMMUNICATIONS OVERHEAD GUY	TEOP	TRAFFIC LIGHT
FL	FLOOD LIGHT	TGUY	TRAFFIC GUY
WH	WEATHER HEAD	MS	MIDSPAN
TRAN	TRANSFORMER	OHG	OVERHEAD GUY
TELEPAK	TELEPAK ATTACHMENT	TOP	TOP OF POLE
SEC	SECONDARY POWER	NEU	NEUTRAL



FILE NAME T-02

PROJECT CITY -

FULL FILENAME T-02.dwg

DATE	DESCRIPTION
	CONSTRUCTION
SHEET	DRAWN BY
2	BBG
SCALE	PAGE
	2

### REVISIONS

REV.	DESCRIPTION	INITIALS	DATE

### MATERIAL LIST

ITEM	DESCRIPTION	QUANTITY
1	TOTAL CABLE FT.	0'
2	DIR-BORE CABLE	0'
3	PULL CABLE	0'
4	BURIED SLACK	0'
5	1.25" HDPE	0'
6	5" HDPE CASING	0'
7	HANDHOLES	0
8	MANHOLES	0
9	SPLICE CLOSURE	0
10	H-POSTS	0
11	GROUND RODS	0
12	AERIAL CABLE	0'
13	RISERS	0
14		

PREPARED BY



PREPARED FOR



MAP NUMBER

2
---

DISCLAIMER

EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF CSPIRE FIBER. BEING ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN PERMISSION.


NOTIFY ALL UTILITIES 72 HOURS PRIOR TO CONSTRUCTION ACTIVITY.  
ONE CALL SYSTEM © 1-800-227-6477



## PLACEMENT-TYPICALS


### TYPICAL DETAIL "A"

PLACE CONDUIT CROSS SECTION

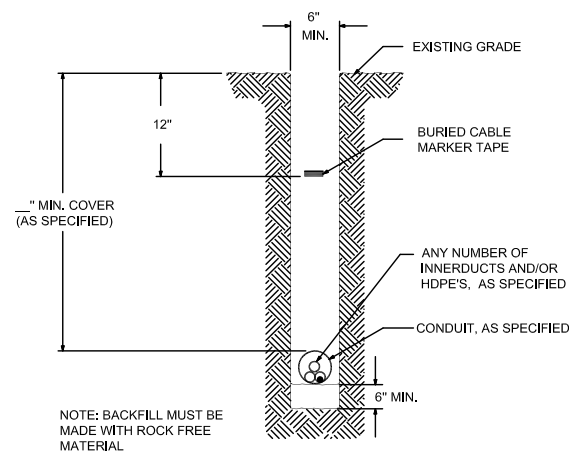


### TYPICAL DETAIL "B"

PLACE HDPE CROSS SECTION

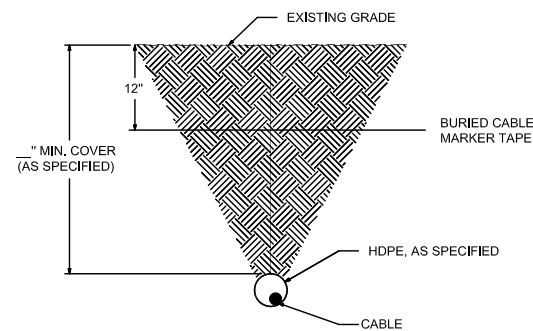


### TYPICAL DETAIL "C"

CONCRETE / PAVEMENT OPEN CUT CROSS SECTION

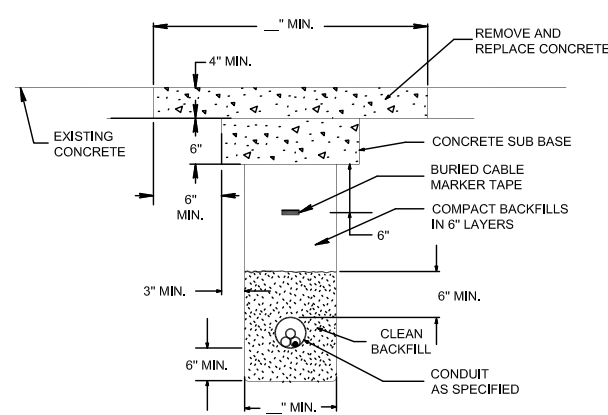

### TYPICAL DETAIL "D"


ASPHALT/PAVEMENT OPEN CUT CROSS SECTION

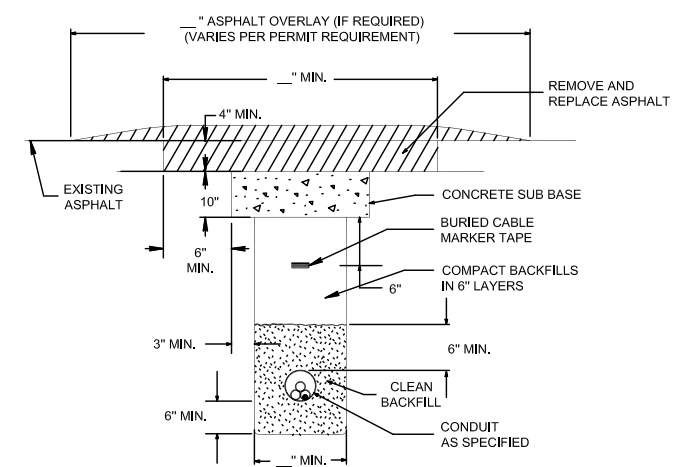

## OPEN CUT-TYPICALS


### TYPICAL DETAIL "E"

BORE CONCRETE SIDEWALK

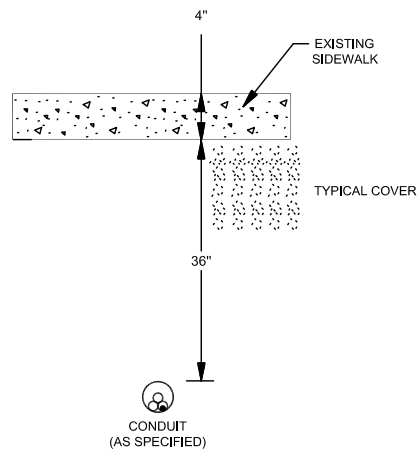


### TYPICAL DETAIL "F"

CORE BORE (CONCRETE / BRICK WALL)

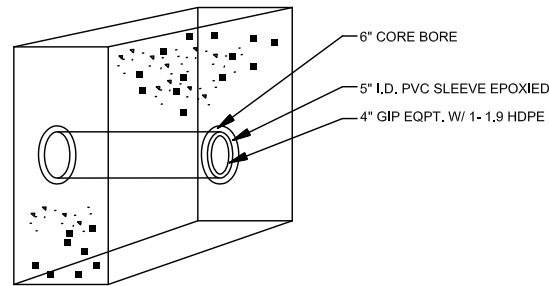


### TYPICAL DETAIL "G"

12"x12" CONCRETE ENCASUREMENT

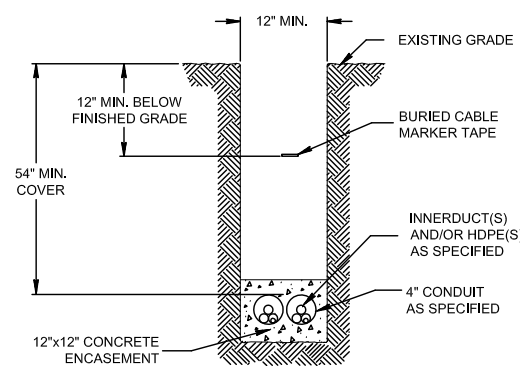


### TYPICAL DETAIL "H"

PLACE (2) 1.25" HDPE IN CONDUIT




### TYPICAL DETAIL "I"

PLACE CABLE IN HDPE




### TYPICAL DETAIL "J"

MANHOLE & HANDHOLE SLACK COIL DETAIL

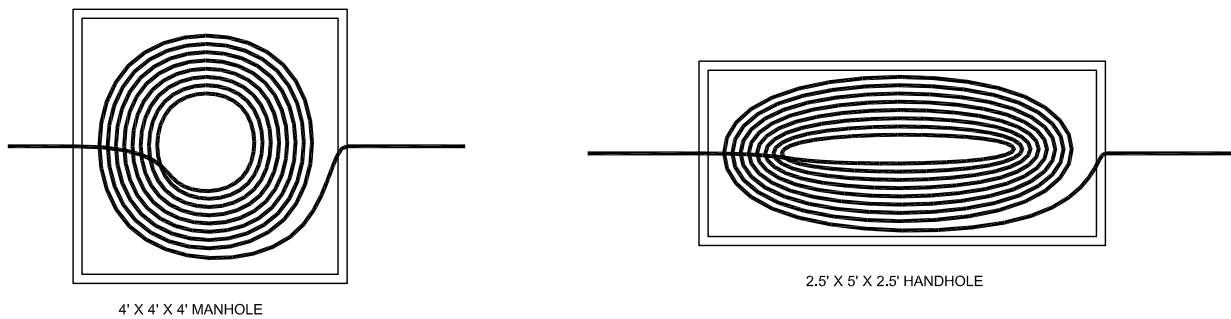

### TYPICAL DETAIL "K"

HANDHOLE INSTALLATION IN CONCRETE / ASPHALT CROSS SECTION

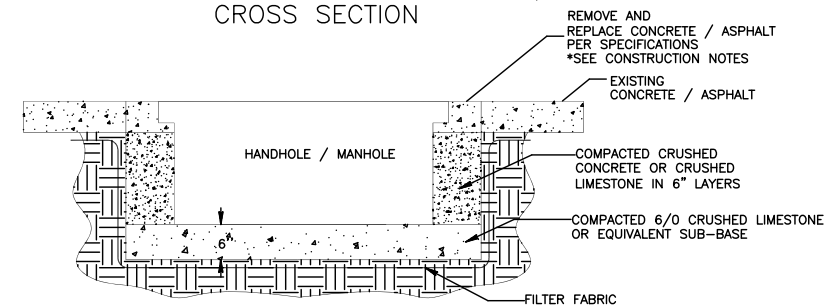

FILE NAME T-03

PROJECT CITY -

FULL FILENAME  
T-03.dwg

DATE	DESCRIPTION
	CONSTRUCTION

SHEET	DRAWN BY
3	BBG

SCALE	PAGE
	3

### REVISIONS

REV.	DESCRIPTION	INITIALS	DATE

### MATERIAL LIST

ITEM	DESCRIPTION	QUANTITY
1	TOTAL CABLE FT.	0'
2	DIR-BORE CABLE	0'
3	PULL CABLE	0'
4	BURIED SLACK	0'
5	1.25" HDPE	0'
6	5" HDPE CASING	0'
7	HANDHOLES	0
8	MANHOLES	0
9	SPLICE CLOSURE	0
10	H-POSTS	0
11	GROUND RODS	0
12	AERIAL CABLE	0'
13	RISERS	0
14		

PREPARED BY



PREPARED FOR



MAP NUMBER

3

DISCLAIMER


EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF CSPIRE FIBER. BEING ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN PERMISSION.

NOTIFY ALL UTILITIES 72 HOURS PRIOR TO CONSTRUCTION ACTIVITY.  
ONE CALL SYSTEM © 1-800-227-6477

# CAPITOL CONCRETE PRODUCTS, INC

FIBER OPTIC/LIGHTGUIDE  
SPLICE VAUEOP  
4'-0"X4'-0"X4'-0"

GRADE 60 REINFORCEMENT  
4500 PSI CONCRETE  
REINFORCEMENT FOR  
AASHTO M-20 LOADING

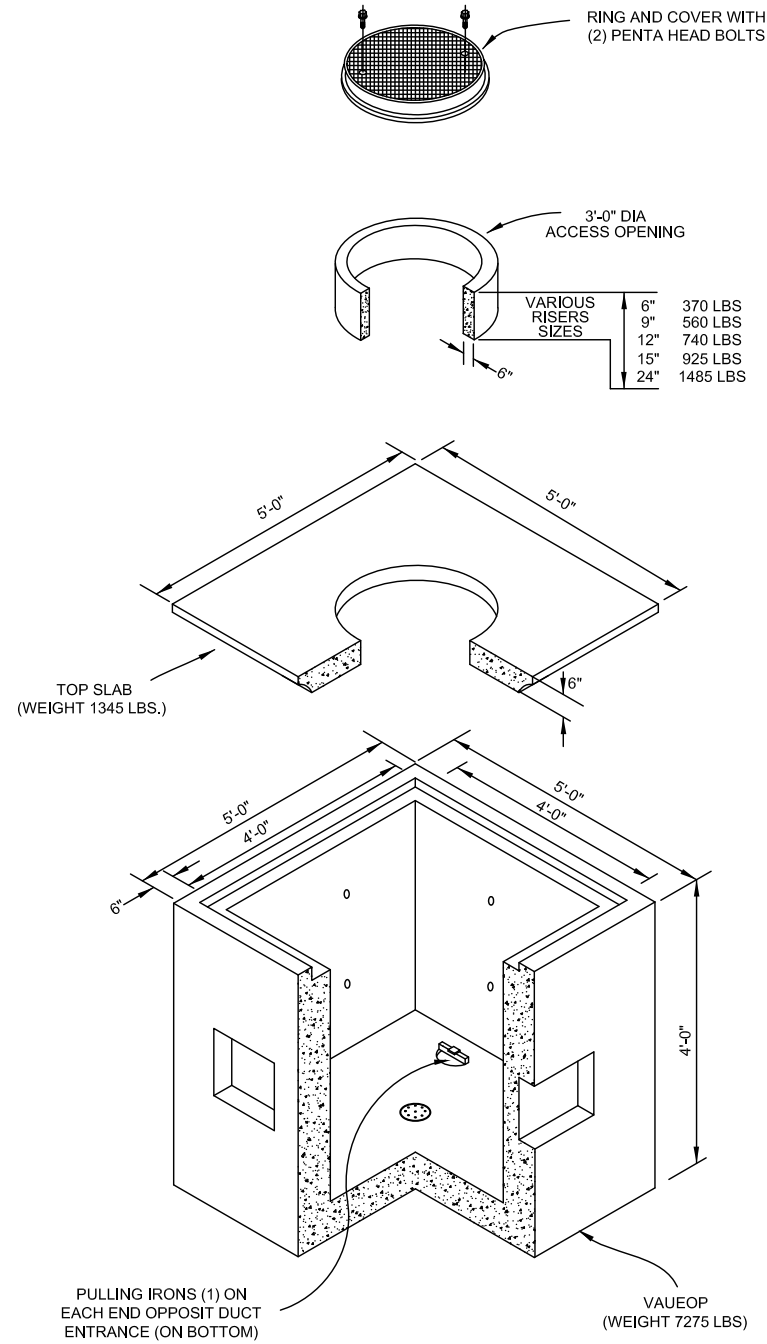

FILE NAME T-04

PROJECT CITY -

FULL FILENAME  
T-04.dwg

DATE	DESCRIPTION CONSTRUCTION
SHEET 4	DRAWN BY BBG
SCALE	PAGE 4

### REVISIONS

REV.	DESCRIPTION	INITIALS	DATE

### MATERIAL LIST

ITEM	DESCRIPTION	QUANTITY
1	TOTAL CABLE FT.	0'
2	DIR-BORE CABLE	0'
3	PULL CABLE	0'
4	BURIED SLACK	0'
5	1.25" HDPE	0'
6	5" HDPE CASING	0'
7	HANDHOLES	0
8	MANHOLES	0
9	SPLICE CLOSURE	0
10	H-POSTS	0
11	GROUND RODS	0
12	AERIAL CABLE	0'
13	RISERS	0
14		

PREPARED BY



PREPARED FOR




MAP NUMBER

	4	


DISCLAIMER

EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF CSPIRE FIBER. BEING ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN PERMISSION.


# UH-5

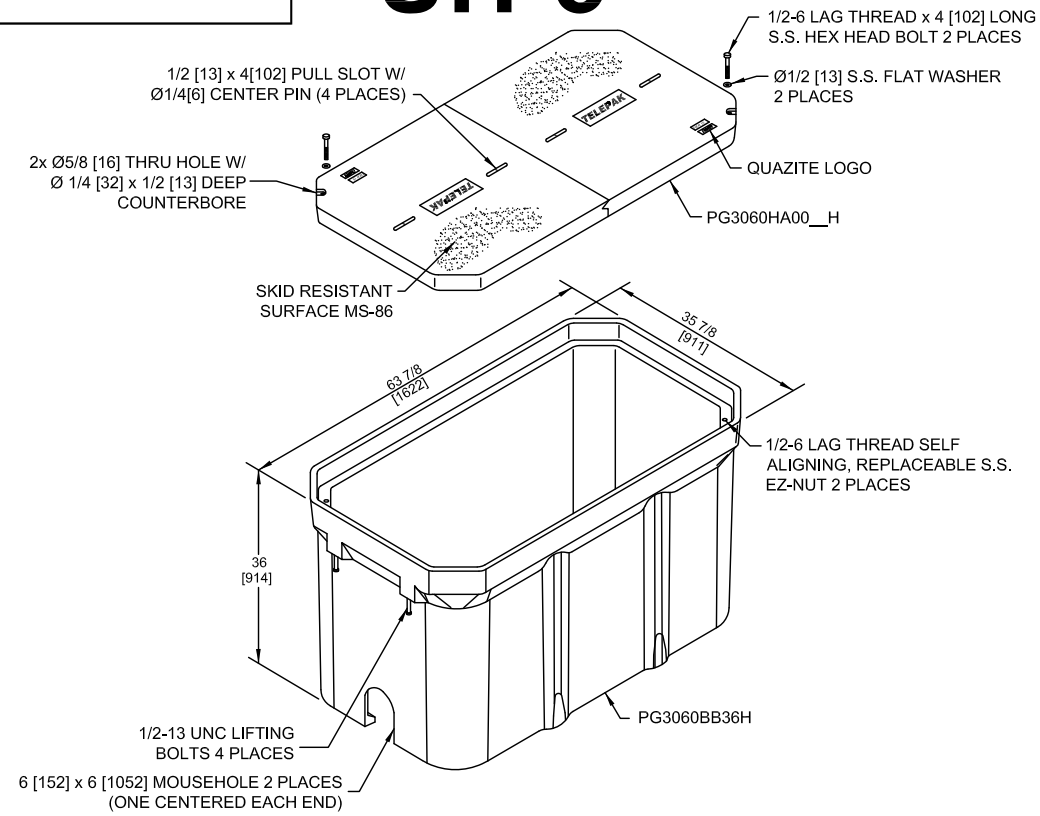


# UH-4

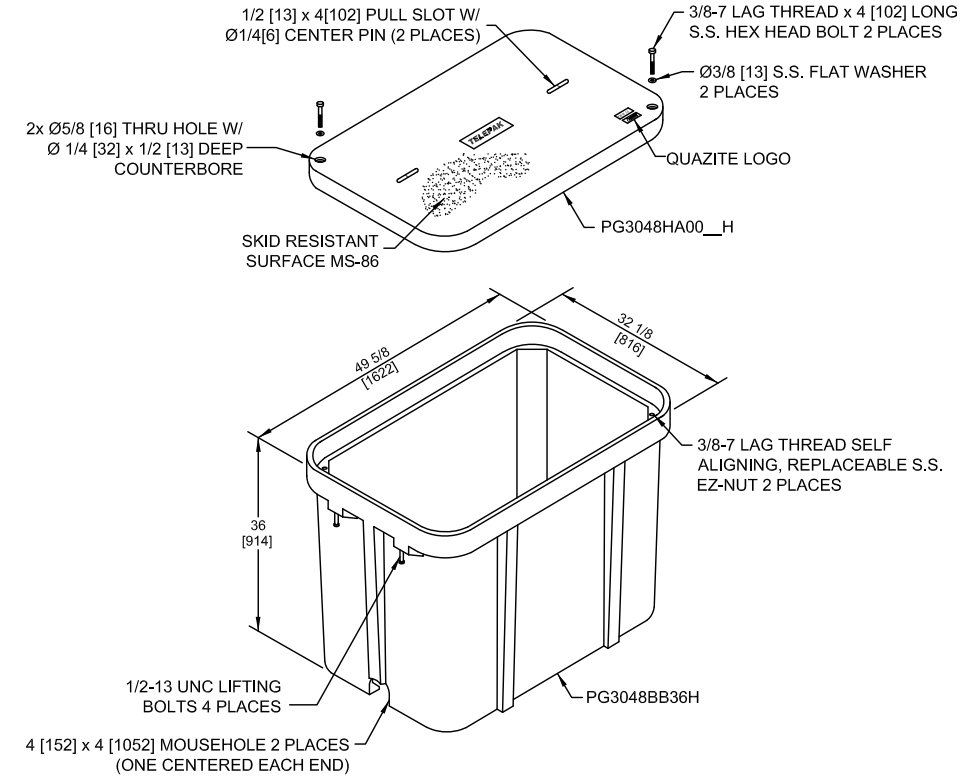

# UH-3

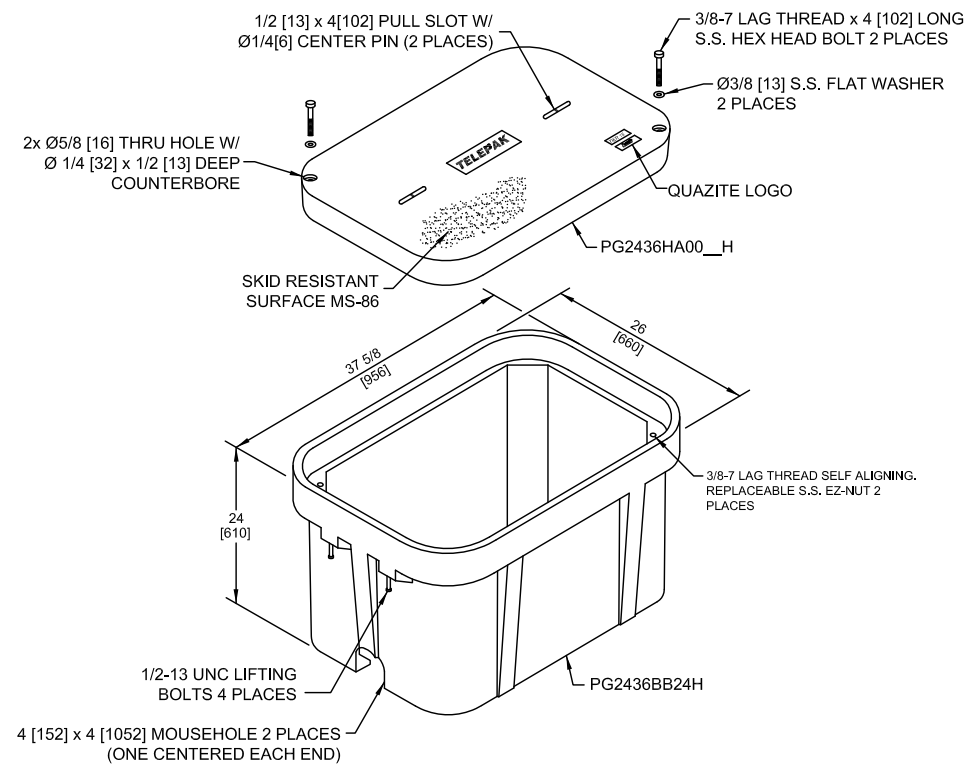

# UH-2

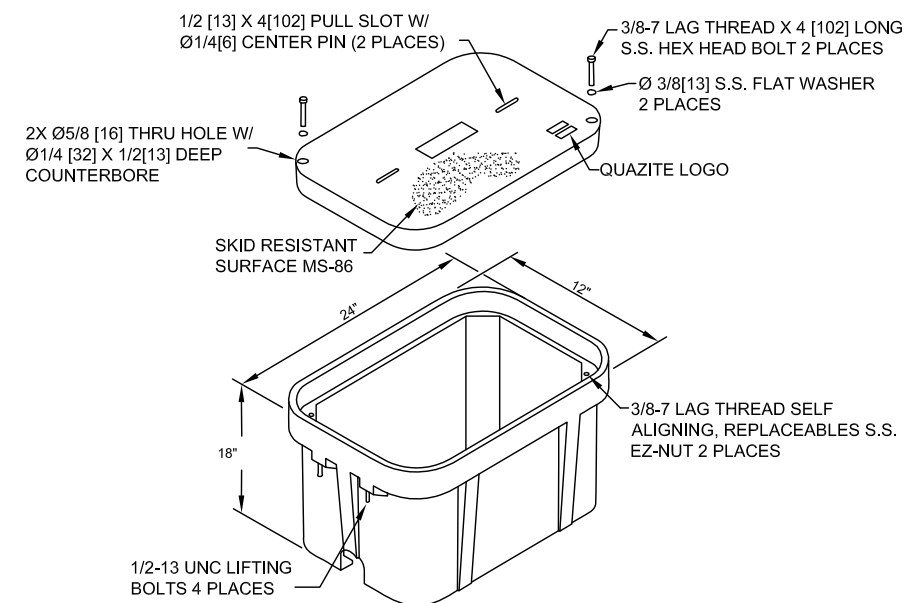

FILE NAME T-05

PROJECT CITY -

FULL FILENAME  
T-05.dwg

DATE	DESCRIPTION CONSTRUCTION
------	-----------------------------

SHEET	DRAWN BY
5	BBG

SCALE	PAGE
	5

## REVISIONS

REV.	DESCRIPTION	INITIALS	DATE

## MATERIAL LIST

ITEM	DESCRIPTION	QUANTITY
1	TOTAL CABLE FT.	0'
2	DIR-BORE CABLE	0'
3	PULL CABLE	0'
4	BURIED SLACK	0'
5	1.25" HDPE	0'
6	5" HDPE CASING	0'
7	HANDHOLES	0
8	MANHOLES	0
9	SPLICE CLOSURE	0
10	H-POSTS	0
11	GROUND RODS	0
12	AERIAL CABLE	0'
13	RISERS	0
14		

PREPARED BY



PREPARED FOR



MAP NUMBER

	5	
--	---	--

DISCLAIMER


EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF CSPIRE FIBER. BEING ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN PERMISSION.

NOTIFY ALL UTILITIES 72 HOURS PRIOR TO CONSTRUCTION ACTIVITY.  
ONE CALL SYSTEM © 1-800-227-6477





## TYPICAL HAND HOLE INSTALLATION

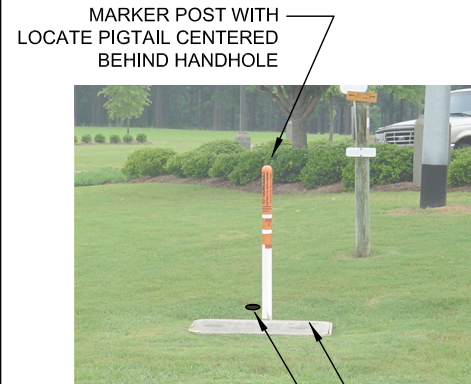

MARKER POST WITH LOCATE PIGTAIL CENTERED BEHIND HANDHOLE

8" x 5/8" GROUND ROD 6" BELOW GROUND AND 6" TO THE LEFT OF MARKER POST OUTSIDE OF HANDHOLE

PIGTAIL INSTALLED IN H/H WITH LONG WIRES (CONNECTORIZED ENDS) FED UP INTO MAKER POST AND SHORT WIRE TO GROUND ROD

**AT EVERY HANDHOLE LOCATION WITH A MARKER POST,** 1.25" HDPE SHOULD EXTEND 48" INTO MARKER POST. HDPE SHOULD ALSO EXTEND 6" ABOVE GRAVEL AT THE BOTTOM OF THE HANDHOLE.

**AT EVERY TEST STATION, BURY** GROUND ROD 6" BELOW GROUND AND 6" TO THE LEFT OF MARKER POST

BLACK WIRE BONDED TO 8" GROUND ROD **AT TEST STATIONS ONLY**

PLACE BLUE TAPE NEAR THE TOP OF HDPE TO INDICATE THE DUCT LEADING TO MARKER POST

### NOTES:

1. THIS ASSEMBLY IS RATED FOR A STATIC DESIGN LOAD OF 15,000 LBS. [66,720 N] OVER A 10 [254] X 10 [254] AREA AND MUST PASS A MIN. STATIC TEST LOAD OF 22,500 LBS. [100,085 N].
2. ALL ENCLOSURES, BOXES AND COVERS, ARE REQUIRED TO CONFORM TO ALL TEST PROVISIONS OF ANSI/SCTE 77 2007 "SPECIFICATION FOR UNDERGROUND ENCLOSURE INTEGRITY" AS MANUFACTURED BY QUAZITE OR EQUIVALENT WITH TELEPAK NETWORK'S ENGINEER'S SIGNED APPROVAL. THE COVERS MUST BE RATED FOR TIER 15 APPLICATIONS AND BOXES RATED FOR TIER 22 APPLICATIONS AND IN NO ASSEMBLY CAN THE COVER DESIGN LOAD EXCEED THE DESIGN LOAD OF THE BOX. ALL COMPONENTS IN AN ASSEMBLY (BOX & COVER) ARE MANUFACTURED USING MATCHED SURFACE TOOLING. ALL COVERS ARE REQUIRED TO HAVE A MINIMUM COEFFICIENT OF FRICTION OF 0.50 IN ACCORDANCE WITH ASTM C 1028 AND HAVE TIER 15 AND "TELEPAK NETWORKS 800-342-3716" EMBOSSED ON THE TOP SURFACE. ALL COVER BOLTS TO BE SELF-CLEANING AUGER BOLT ASSEMBLIES.

**PIGTAILS ARE TO BE INSTALLED AT TEST STATION (T.S.) ONLY.**

**HANDHOLES ARE TO BE INSTALLED A MINIMUM OF THREE FEET FROM ANY UTILITY OR POWER POLE.**

**BOXES** (Nestable)


DESCRIPTION	PART NO.	WEIGHT	DESIGN/TEST LOAD#
UH-5 30x60x36	PG3060Z501	933# 423KG.	15'000 LBS
UH-4 30x48x36	PG3048Z579	563# 255KG.	15'000 LBS
UH-3 24x36x24	PG2436Z905	284# 129KG.	15'000 LBS

DIMENSIONS ARE IN INCHES OR MILLIMETERS IN BRACKETS UNLESS OTHERWISE NOTED.


## TYPICAL UH-1 / UH-2 HAND HOLE INSTALLATION PROCEDURES AT BUILDING ENTRIES



UH-1 / UH-2 INSTALLATION LOCATION WILL BE MARKED BY A STAKE AND/OR PAINT. CSPIRE/OSP WILL INSTALL CONDUIT 8" UNDERGROUND TO DESIRABLE UH-1 LOCATION.

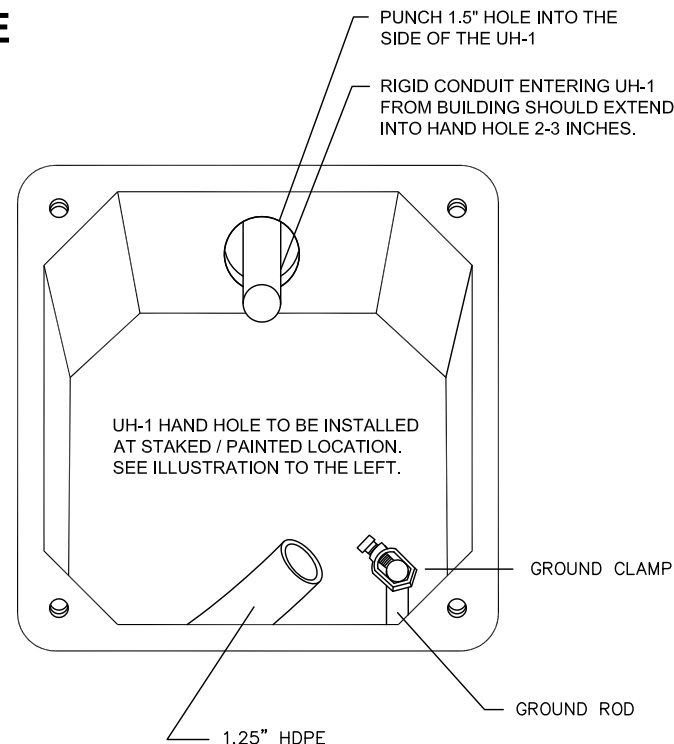

## TYPICAL BUDI BOX, SKIRT & ONT COMBO OUTDOOR INSTALLATION PROCEDURES AT BUILDING ENTRIES

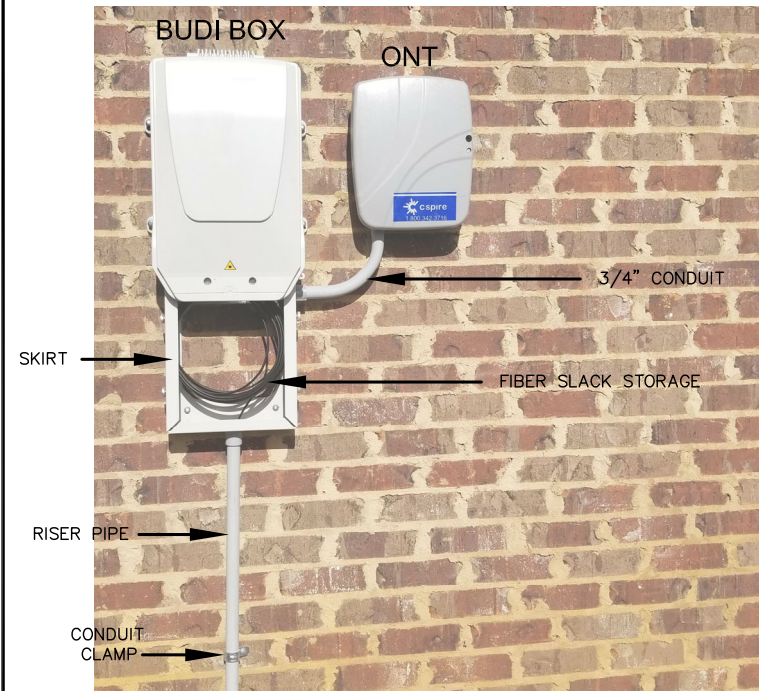


1. PLEASE MOUNT BUDI BOX 36" OFF THE GROUND UNLESS OTHERWISE STATED ON THE DRAWINGS.
2. BUDI BOX & ONT INSTALLATION LOCATION WILL BE SHOWN ON THE CONSTRUCTION DRAWINGS. PLEASE DO NOT USE PICTURES AS A HEIGHT INDICATOR FOR THE INSTALLATION.
3. MOUNT 3' RISER PIPE TO THE WALL USING SHOWN CONDUIT STRAPS.
4. JOIN RISER PIPE TO SKIRT AT SHOWN LOCATION & MOUNT BUDI BOX & SKIRT TO WALL.
5. USING A 3/4" SWEEPING 90, CONNECT SKIRT TO ONT AND MOUNT ONT TO WALL.
6. PLACE FIBER FROM DUCT INTO RISER PIPE AND INTO SKIRT LEAVING A 5' SLACK LOOP.

## BUDI BOX, SKIRT & ONT COMBO OUTDOOR INSTALLATION COMPLETED INSTALL



## TYPICAL ONT OUTDOOR INSTALLATION PROCEDURES AT BUILDING ENTRIES

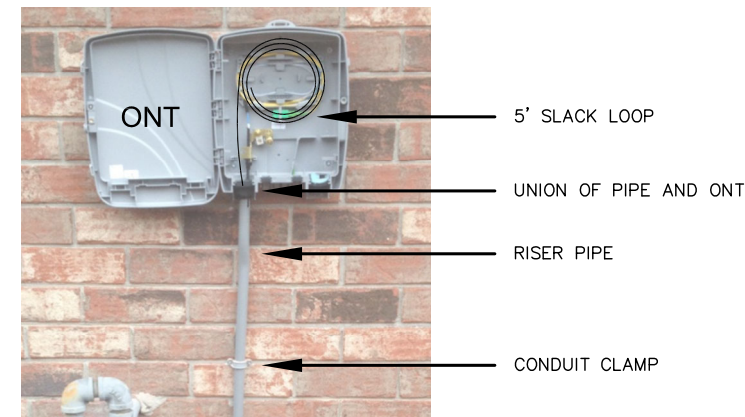

1. PLEASE MOUNT ONT 48" OFF THE GROUND UNLESS OTHERWISE STATED ON THE DRAWINGS.
2. ONT & FDP INSTALLATION LOCATION WILL BE SHOWN ON THE CONSTRUCTION DRAWINGS. PLEASE DO NOT USE PICTURES AS A HEIGHT INDICATOR FOR THE INSTALLATION. MOUNT ONT AS CLOSE TO THE POWER METER AS POSSIBLE
3. DUCT PLACED BY DIRECTIONAL BORING SHOULD MEET THE RISER PIPE UNDERGROUND NEAR THE BASE OF THE WALL. A 4" GAP BETWEEN THE DUCT AND THE RISER PIPE IS ACCEPTABLE.
4. MOUNT 4' RISER PIPE TO THE WALL USING SHOWN CONDUIT CLAMPS.
5. JOIN RISER PIPE TO ONT AT SHOWN LOCATION & MOUNT ONT TO THE WALL.
6. PLACE FIBER FROM DUCT INTO RISER PIPE AND INTO ONT.
7. LEAVE 5' OF SLACK INSIDE OF THE ONT. SLACK SHOULD BE LOOSELY STORED AND NOT LOOPED TIGHTLY.

FILE NAME	T-06
PROJECT CITY	-
FULL FILENAME	T-06.dwg
DATE	03-10-16
DESCRIPTION	CONSTRUCTION
SHEET	6
DRAWN BY	J.BUSBY
SCALE	1"=50'
PAGE	6

### REVISIONS

REV.	DESCRIPTION	INITIALS	DATE

### MATERIAL LIST

ITEM	DESCRIPTION	QUANTITY
1	TOTAL CABLE FT.	0'
2	DIR-BORE CABLE	0'
3	PULL CABLE	0'
4	BURIED SLACK	0'
5	1.25" HDPE	0'
6	5" HDPE CASING	0'
7	HANDHOLES	0
8	MANHOLES	0
9	SPLICE CLOSURE	0
10	H-POSTS	0
11	GROUND RODS	0
12	AERIAL CABLE	0'
13	RISERS	0
14		

PREPARED BY



PREPARED FOR



MAP NUMBER

	6	

DISCLAIMER

EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF CSPIRE FIBER. BEING ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN PERMISSION.

NOTIFY ALL UTILITIES 72 HOURS PRIOR TO CONSTRUCTION ACTIVITY.  
ONE CALL SYSTEM © 1-800-227-6477





FILE NAME T-07	
PROJECT CITY -	
FULL FILENAME T-07.dwg	
DATE	DESCRIPTION CONSTRUCTION
SHEET 7	DRAWN BY BBG
SCALE	PAGE 7

REVISIONS			
REV.	DESCRIPTION	INITIALS	DATE


MATERIAL LIST		
ITEM	DESCRIPTION	QUANTITY
1	TOTAL CABLE FT.	0'
2	DIR-BORE CABLE	0'
3	PULL CABLE	0'
4	BURIED SLACK	0'
5	1.25" HDPE	0'
6	5" HDPE CASING	0'
7	HANDHOLES	0
8	MANHOLES	0
9	SPLICE CLOSURE	0
10	H-POSTS	0
11	GROUND RODS	0
12	AERIAL CABLE	0'
13	RISERS	0
14		

PREPARED BY


PREPARED FOR

MAP NUMBER	
	7
DISCLAIMER	


EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF CSPIRE FIBER. BEING ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN PERMISSION.

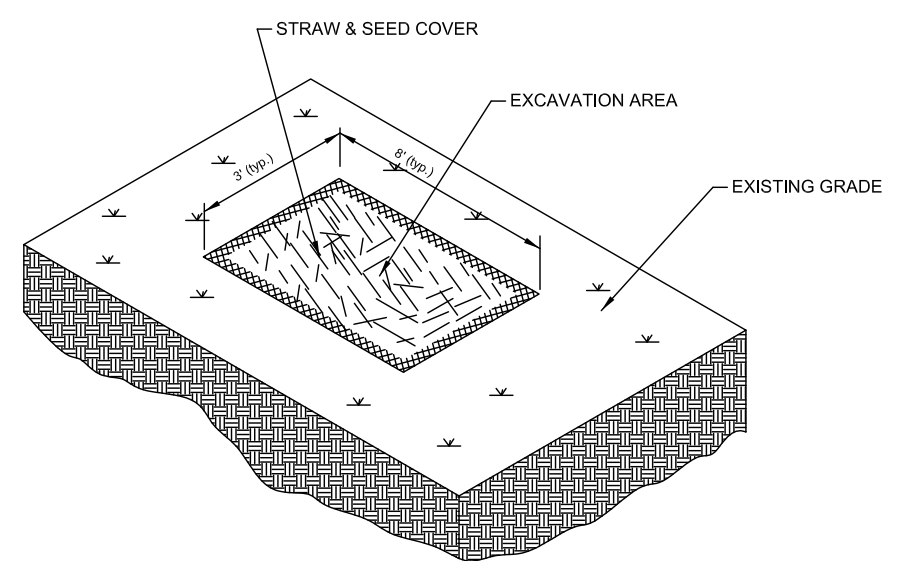


**TYPICAL EROSION DETAIL #1**  
**NOTE TO CONSTRUCTION:**  
 WHERE APPLICABLE RE-COMPACT SOIL AROUND HANDHOLES AND BOREPITS USE HAY AND SEED COVER FOR EROSION CONTROL.

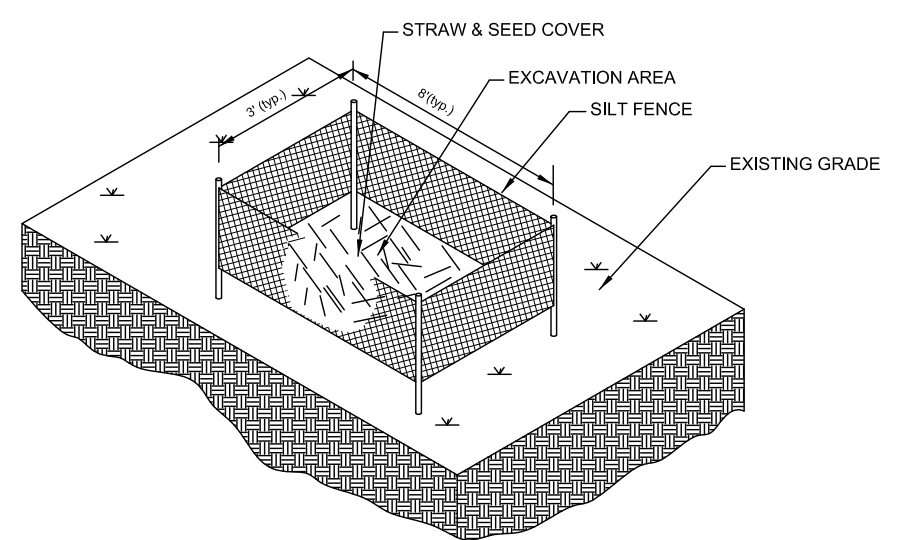

**TYPICAL EROSION DETAIL #2**  
**NOTE TO CONSTRUCTION:**  
 FOR HIGHER DEGREE OF SLOPE RE-COMPACT SOIL AROUND HANDHOLES AND BOREPITS. USE HAY, SEED AND SILT FENCES FOR EROSION CONTROL.

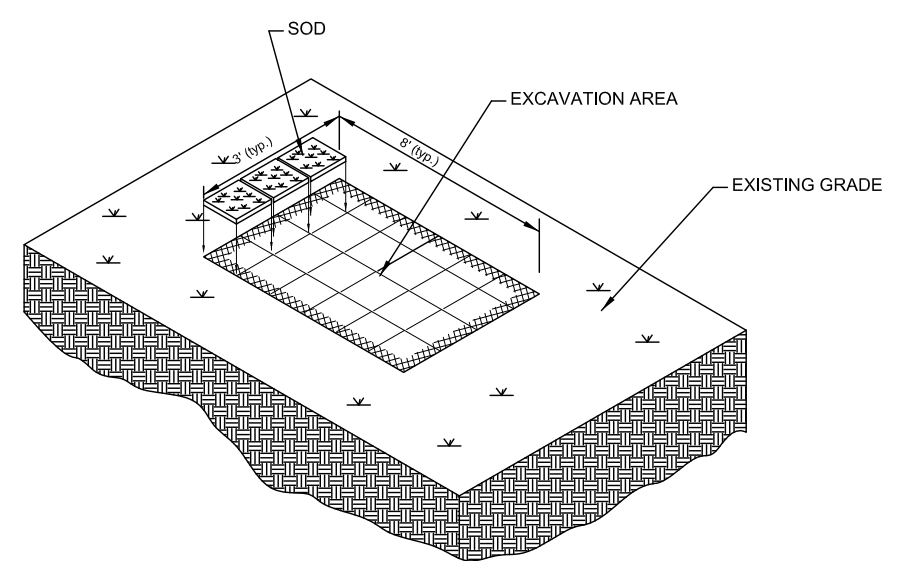


**TYPICAL EROSION DETAIL #3**  
**NOTE TO CONSTRUCTION:**  
 FOR EROSION CONTROL IN WELL MANICURED AREAS RE-COMPACT SOIL AROUND HANDHOLES AND BOREPITS. RE-SOD TO MATCH EXISTING GROUND COVER.

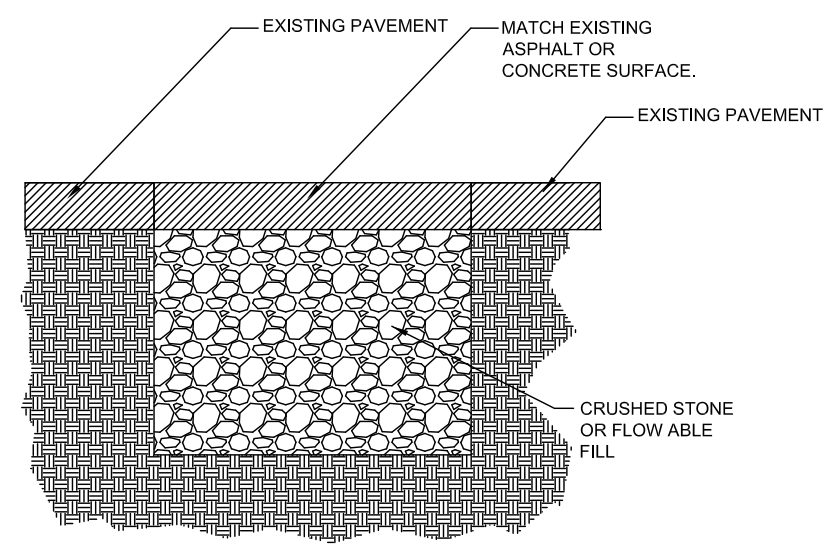


**TYPICAL PAVEMENT REPAIR**  
**DETAIL #4**  
**NOTE TO CONSTRUCTION:**  
 RE-COMPACT EFFECTED AREAS WITH CRUSHED STONE OR FLOWABLE FILL. MATCH EXISTING PAVEMENT SURFACE.


# DIELECTRIC TEST STATION (DTS) TYPICALS

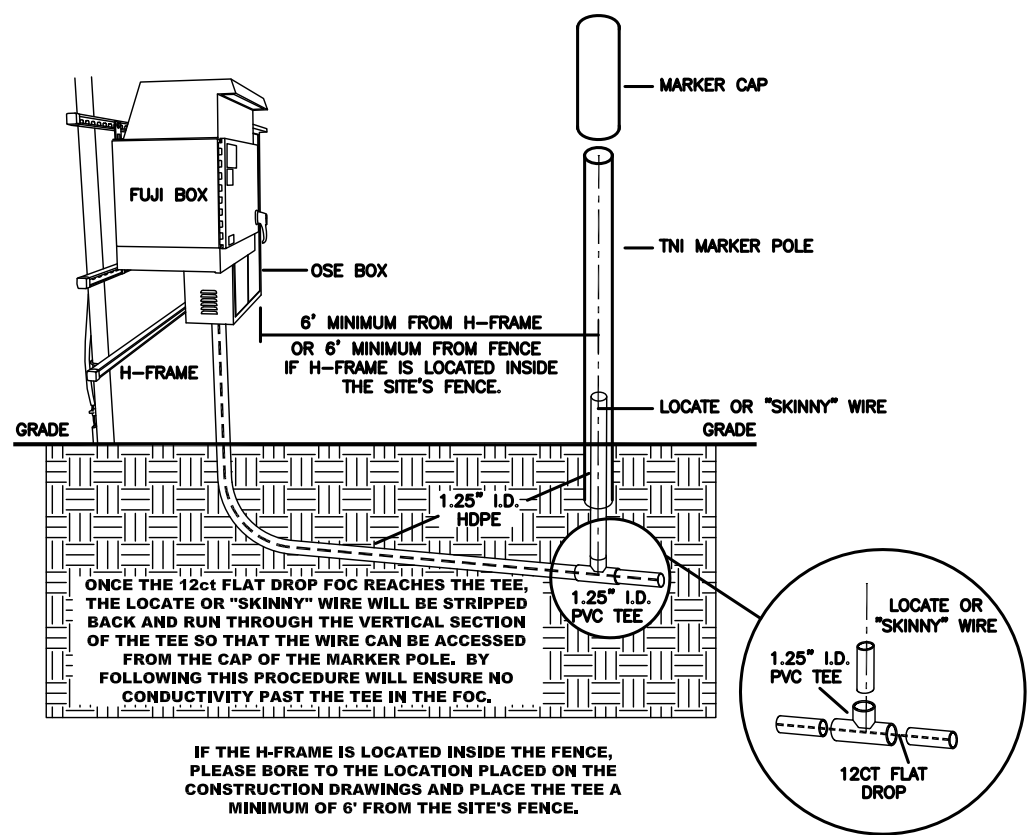

# FLUSH MOUNTED WATER BOX INSTALLATION OPTION TWO

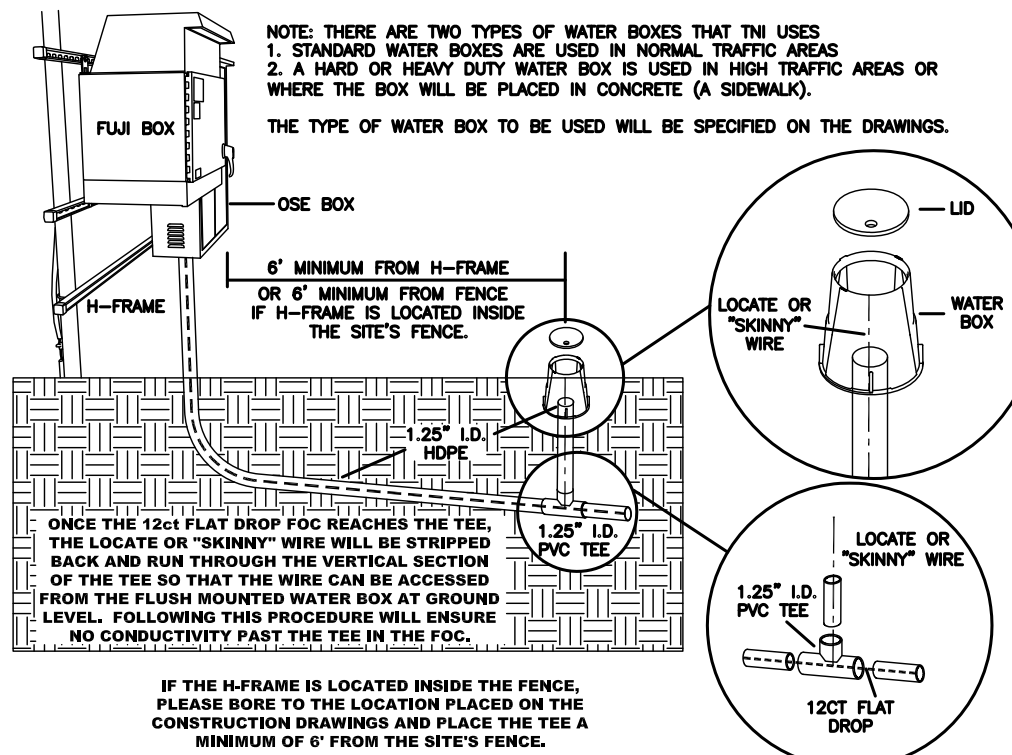

# THREADED PVC FLUSH MOUNTED ACCESS CAP OPTION THREE

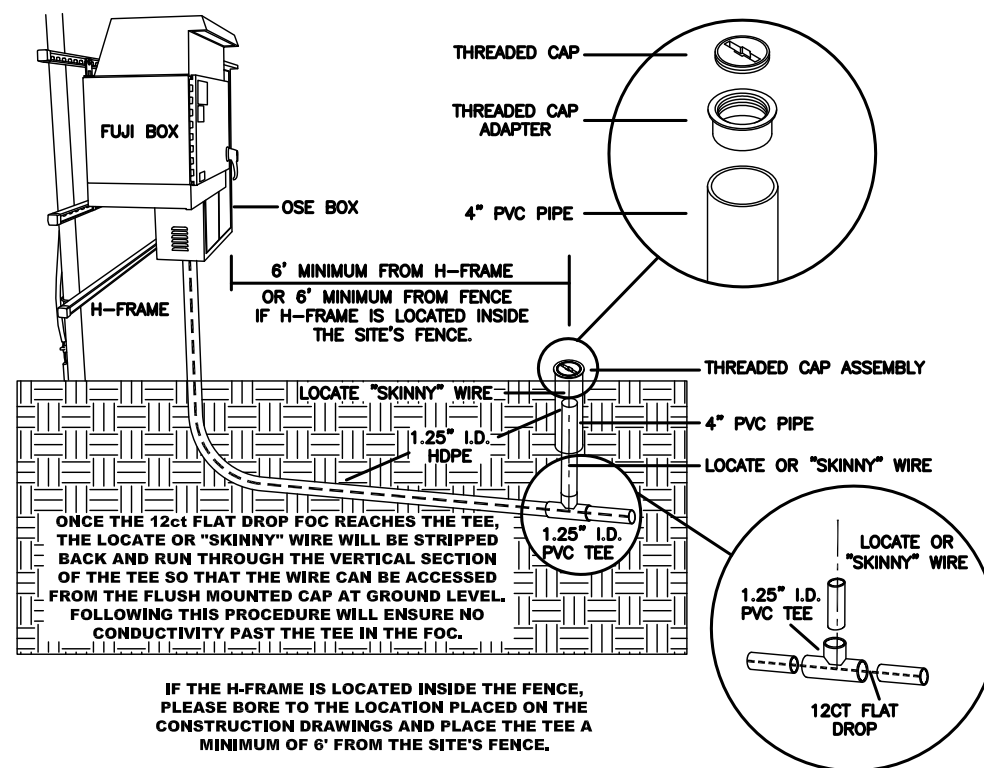

FILE NAME T-08

PROJECT CITY -

FULL FILENAME T-08.dwg

DATE DESCRIPTION CONSTRUCTION

SHEET 8 DRAWN BY BBG

SCALE PAGE 8

### REVISIONS

REV.	DESCRIPTION	INITIALS	DATE

### MATERIAL LIST

ITEM	DESCRIPTION	QUANTITY
1	TOTAL CABLE FT.	0'
2	DIR-BORE CABLE	0'
3	PULL CABLE	0'
4	BURIED SLACK	0'
5	1.25" HDPE	0'
6	5" HDPE CASING	0'
7	HANDHOLES	0
8	MANHOLES	0
9	SPLICE CLOSURE	0
10	H-POSTS	0
11	GROUND RODS	0
12	AERIAL CABLE	0'
13	RISERS	0
14		

PREPARED BY



PREPARED FOR



MAP NUMBER

	8	
--	---	--

DISCLAIMER

EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF CSPIRE FIBER. BEING ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN PERMISSION.


NOTIFY ALL UTILITIES 72 HOURS PRIOR TO CONSTRUCTION ACTIVITY.  
 ONE CALL SYSTEM © 1-800-227-6477




# SIDEWALK CUT & RESTORE TYPICAL DETAIL

SIDEWALK MUST BE ADA COMPLIANT WHERE APPLICABLE

## TYPICAL DETAIL "A" CONCRETE CUT & RESTORE REPLACEMENT

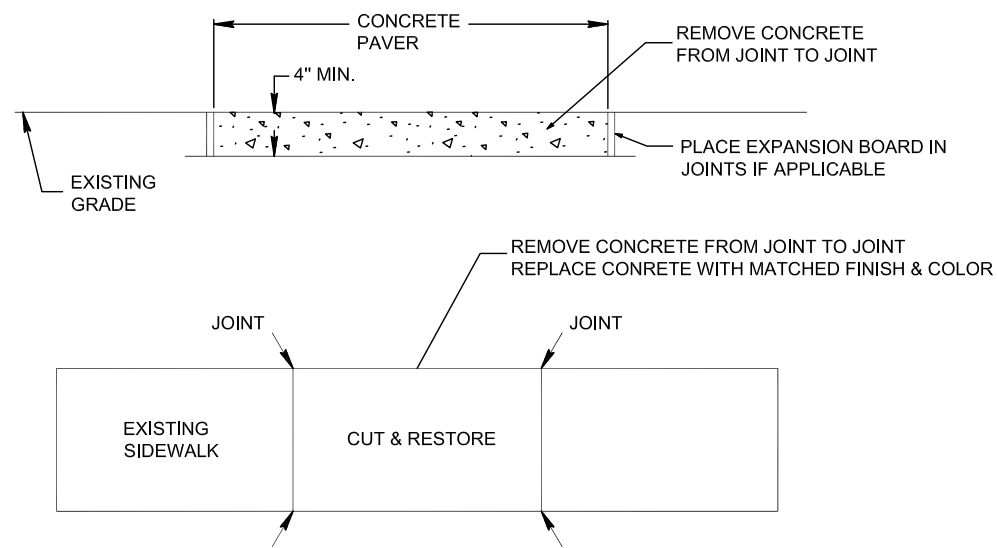

## TYPICAL DETAIL "B" HANDHOLE INSTALLATION IN CONCRETE SIDEWALK

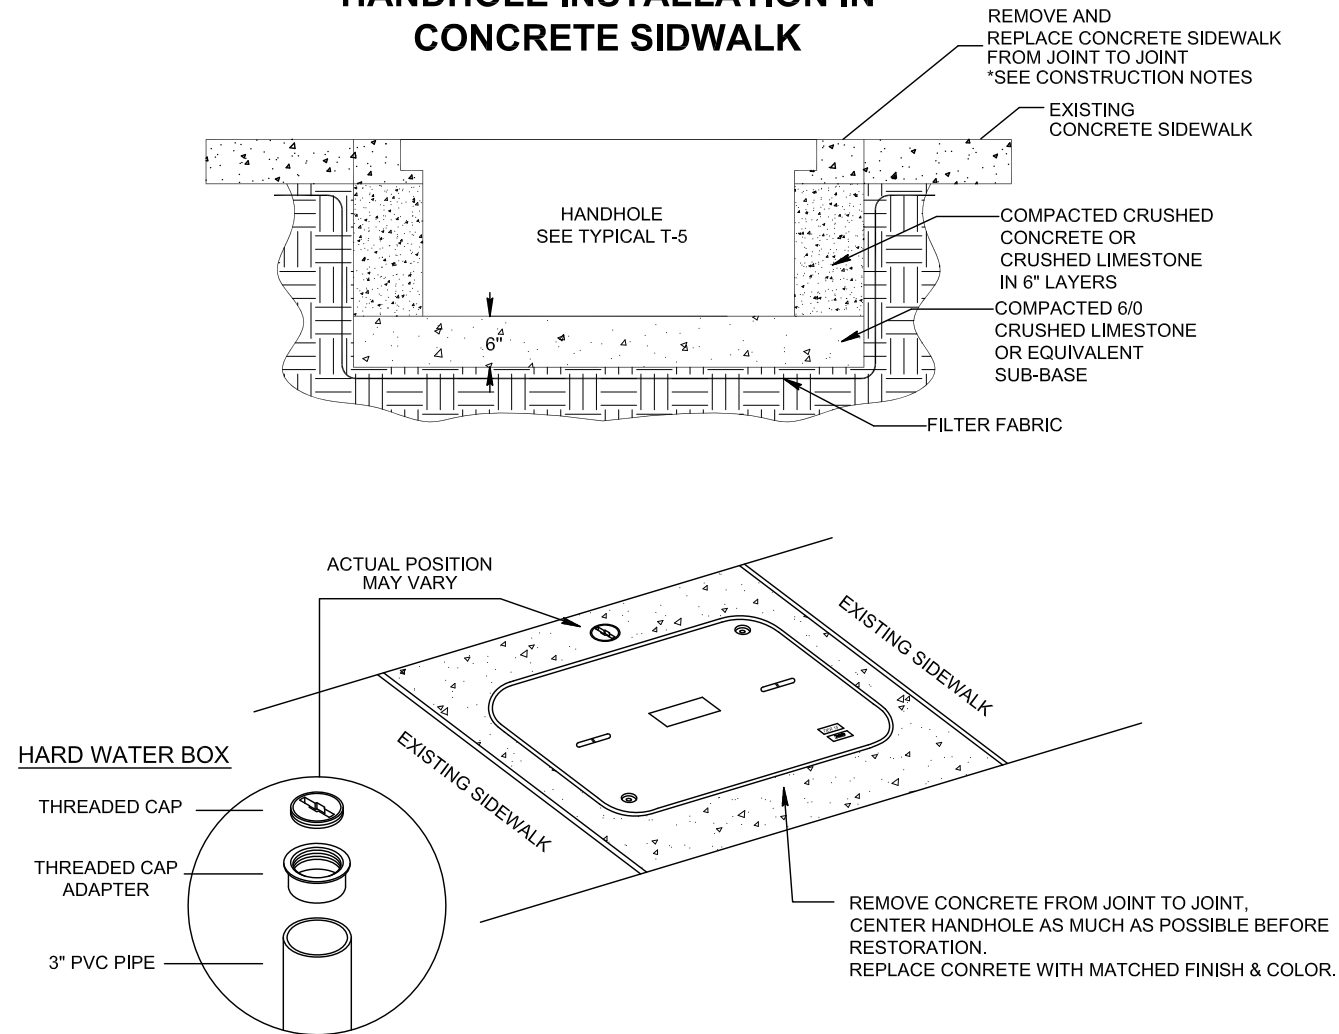

### CONSTRUCTION NOTES:

1. PROVIDE BARRIERS AND TRAFFIC CONTROL PER MUTCD REV.3 OR NEWER.
2. CUT & RESTORE AREAS SHALL BE RETURNED TO ORIGINAL, OR BETTER CONDITION.
3. SIDEWALKS THAT HAVE EXPANSION BOARD IN USE IN ADJACENT AREAS SHALL BE RESTORED WITH EXPANSION BOARD.
4. EXPOSED AGGREGATE FINISHED SIDEWALKS SHALL BE RESTORED WITH SAME FINISH.
5. ENSURE FINISH IS SLIP RESISTANT.
6. BRICK SIDEWALKS SHALL BE RESTORED TO THE SAME FINISH.
7. ENSURE FLUSH MOUNT TEST STATIONS DO NOT PRESENT A TRIP HAZARD.
8. COVER CONCRETE FOR A MINIMUM OF 12 HOURS PRIOR TO REMOVING PEDESTRIAN BARRIERS.
9. RESTORATION AREA MUST BE RESTORED TO AN OPERATIONAL SIDEWALK PRIOR TO CLOSING ANY CONSTRUCTION PERMITS.

**AT EVERY HANDHOLE LOCATION  
WITH TEST WIRE IN A SIDEWALK,  
IF APPLICABLE, INSTALL A FLUSH  
MOUNT HARD WATER BOX.  
RESTORE CONCRETE TO ORIGINAL  
FINISH & COLOR**

FILE NAME T-09

PROJECT CITY -

FULL FILENAME  
T-09.dwg

DATE	DESCRIPTION CONSTRUCTION
------	-----------------------------

SHEET 9	DRAWN BY BBG
------------	-----------------

SCALE	PAGE 9
-------	-----------

### REVISIONS

REV.	DESCRIPTION	INITIALS	DATE

### MATERIAL LIST

ITEM	DESCRIPTION	QUANTITY
1	TOTAL CABLE FT.	0'
2	DIR-BORE CABLE	0'
3	PULL CABLE	0'
4	BURIED SLACK	0'
5	1.25" HDPE	0'
6	5" HDPE CASING	0'
7	HANDHOLES	0
8	MANHOLES	0
9	SPLICE CLOSURE	0
10	H-POSTS	0
11	GROUND RODS	0
12	AERIAL CABLE	0'
13	RISERS	0
14		

PREPARED BY



PREPARED FOR



MAP NUMBER


9	
---	--

DISCLAIMER


EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF CSPIRE FIBER. BEING ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN PERMISSION.



CANTON, MS  
MADISON COUNTY

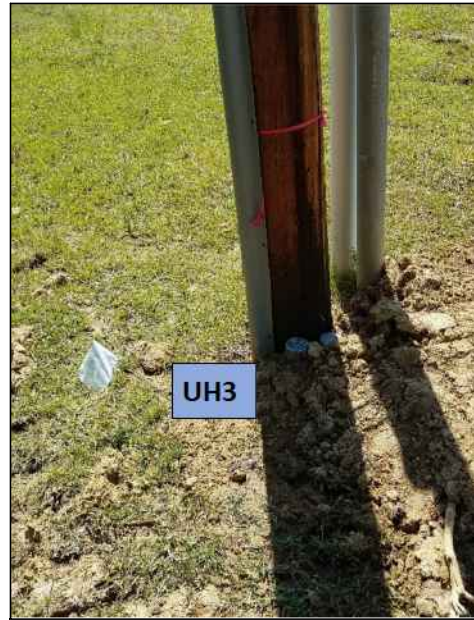

@ 5+71 PLACE UH-3 AND ACCESS EXISTING DUCT AT A 45 ANGLE. USE 1.25" INTERDUCT TO INTERCEPT

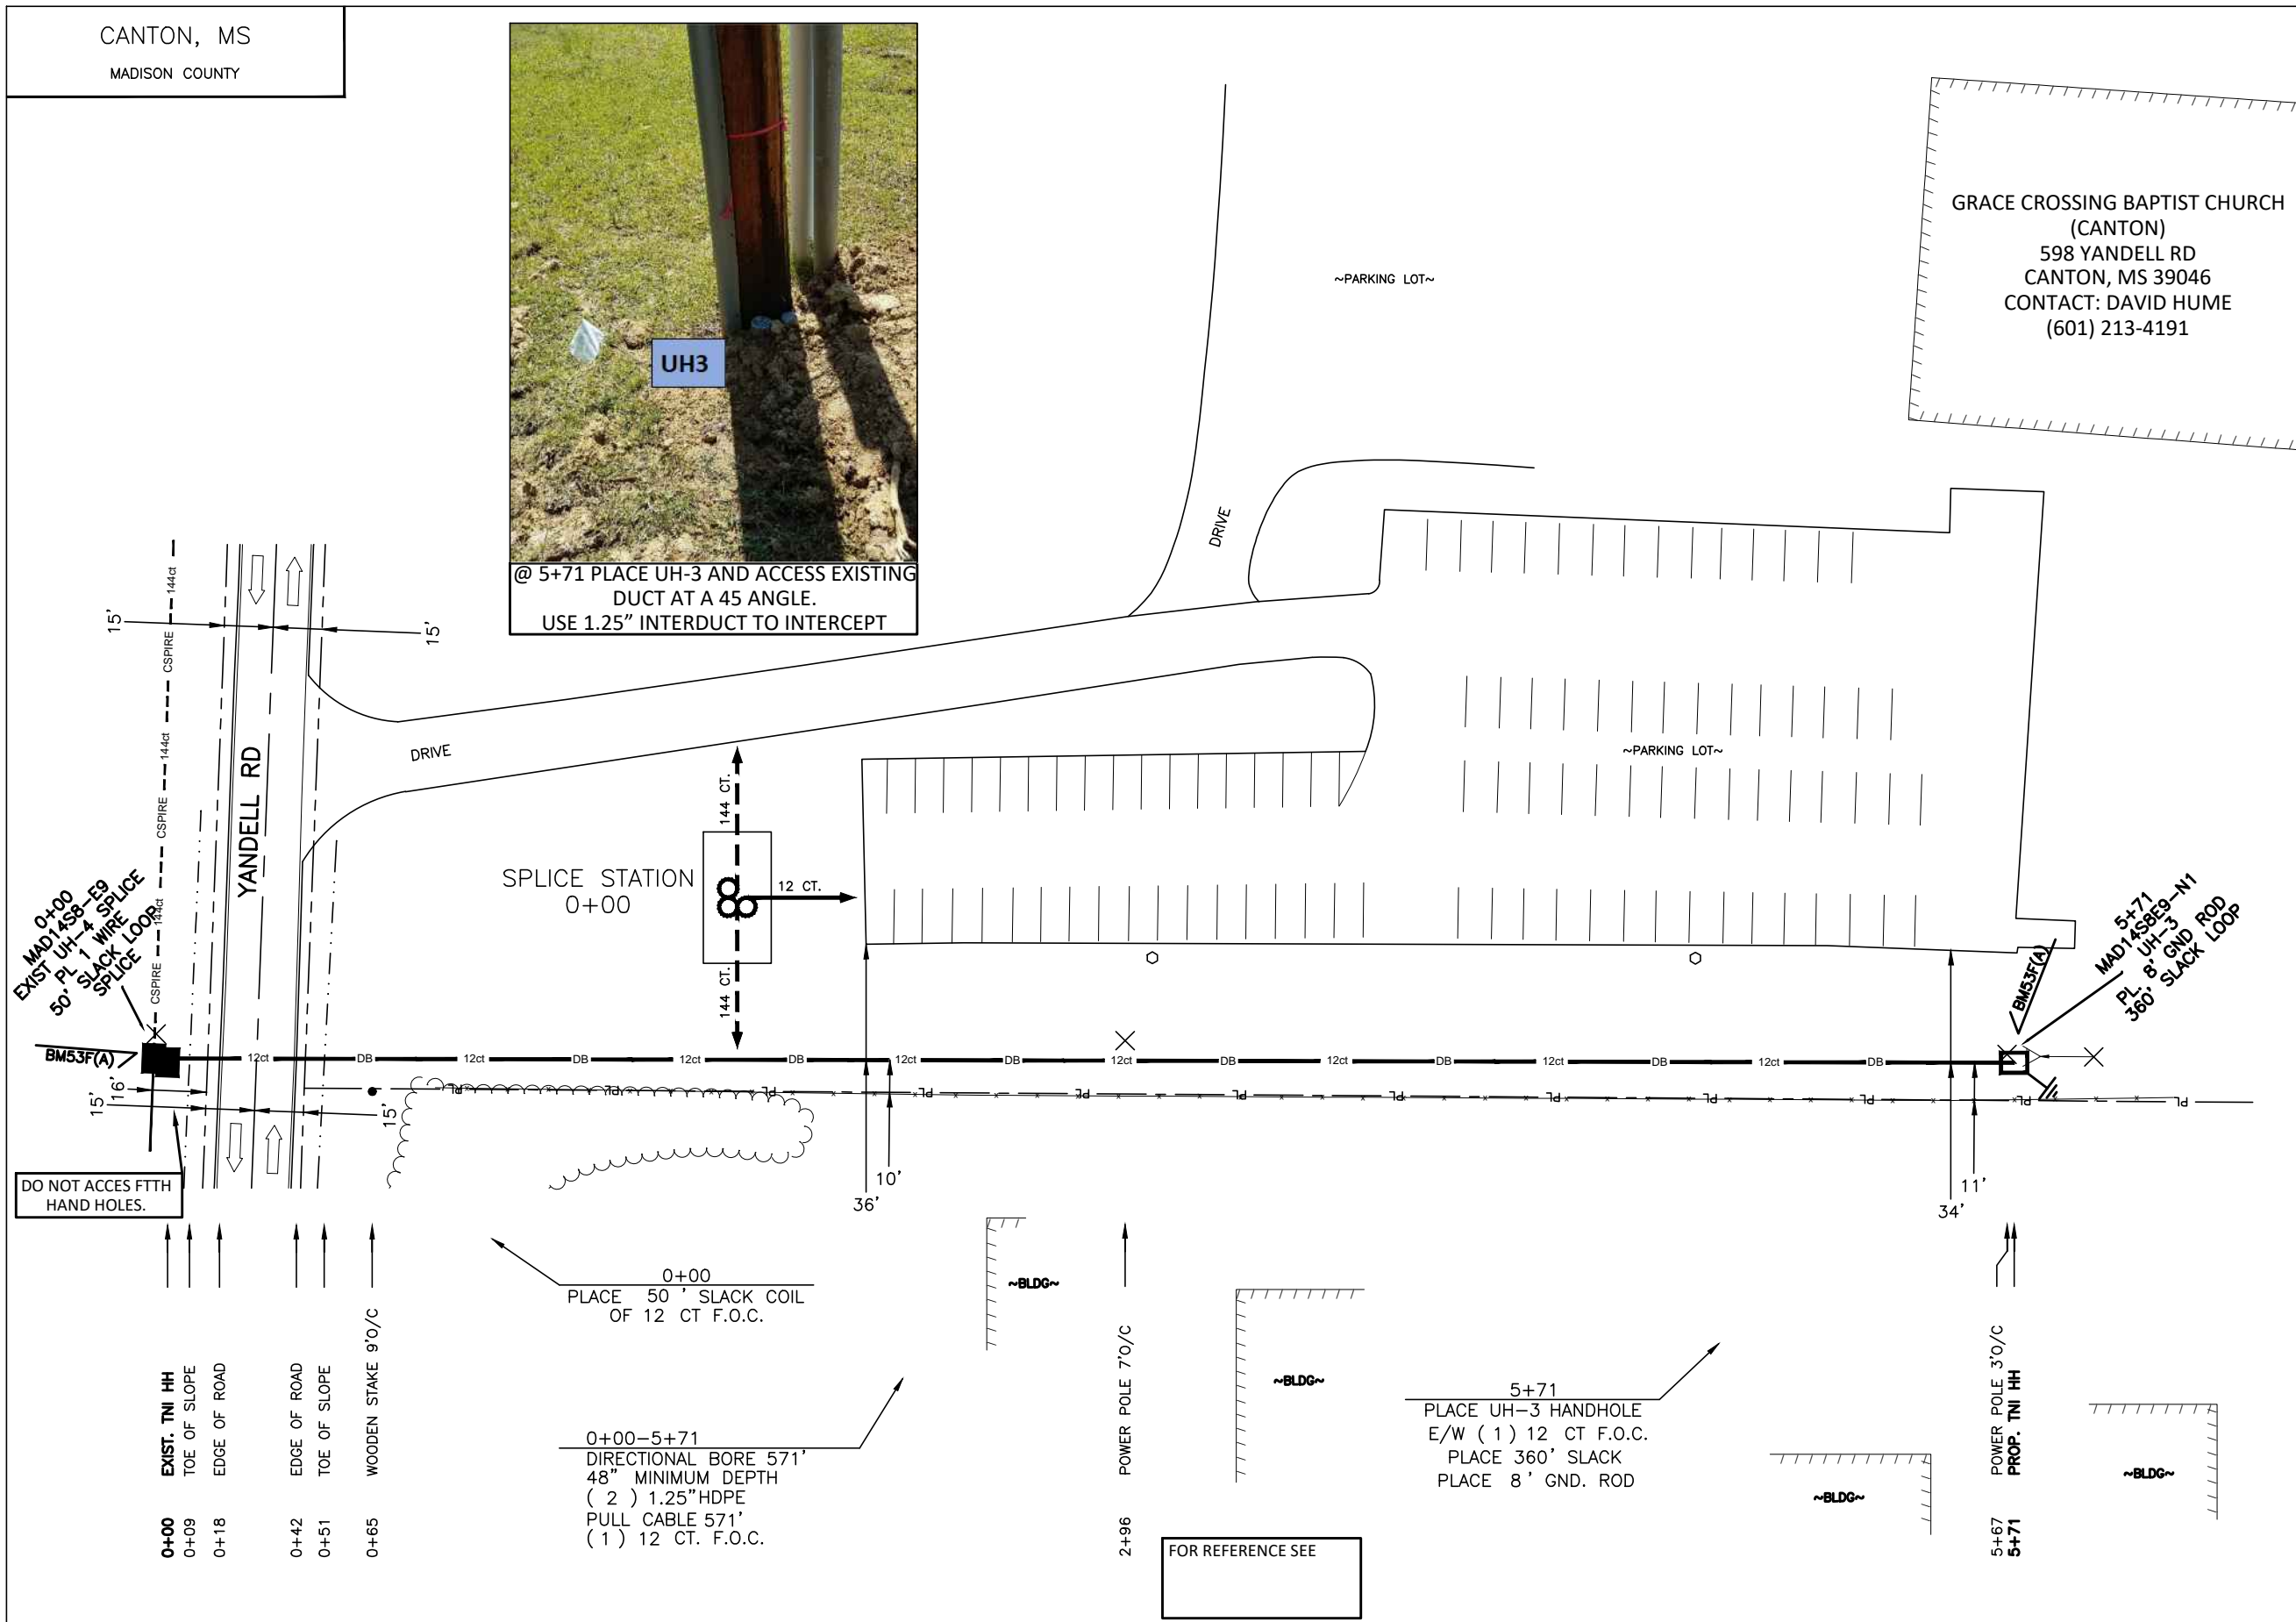

GRACE CROSSING BAPTIST CHURCH  
(CANTON)  
598 YANDELL RD  
CANTON, MS 39046  
CONTACT: DAVID HUME  
(601) 213-4191



FILE NAME: GRACE CROSSING BAPTIST CHURCH (CANTON).dwg  
PROJECT CITY: CANTON  
DATE: 6/6/21 DESCRIPTION: Construction  
SHEET: 001 SCALE: 1"=50'

REVISIONS

REV.	DESCRIPTION	INITIALS	DATE

MATERIAL LIST

ITEM	DESCRIPTION	QUANTITY
1	TOTAL CABLE FT.	981'
2	DIR-BORE CABLE	571'
3	PULL CABLE	0'
4	BURIED SLACK	410'
5	1.25" HDPE	1142'
6	5" HDPE CASING	0'
7	HANDHOLES	1
8	MANHOLES	0
9	SPLICE CLOSURE	1
10	H-POSTS	0
11	GROUND RODS	1
12	AERIAL CABLE	0
13	RISERS	0
14		

PREPARED BY  
**BBG**  
43 Town Center Square, Suite 203  
Hattiesburg, MS 39402  
Office phone: (601) 402-9149  
Email: designservices@bbgeomatics.com

PREPARED FOR  
**cspire**

MAP NUMBER		
DISCLAIMER		

EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT, THESE DRAWINGS AND SPECIFICATIONS SHALL REMAIN THE PROPERTY OF CSPIRE FIBER. BEING ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN PERMISSION.