

Purchasing Department
Madison County Board of Supervisors
146 West Center Street
Canton, Mississippi 39046

601-855-5503
hardy@madison-co.com

12 December 2017

District 1 Supervisor Sheila Jones
District 2 Supervisor Trey Baxter
District 3 Supervisor Gerald Steen
District 4 Supervisor David Bishop
District 5 Supervisor Paul Griffin


Subject: Authorize issuance of two purchase orders in amount of \$200,849.30 each to Key LLC for repair of Virililia Road bridges SA45-047 and SA45-048

Dear Board Members:

The Road Department has requested that two purchase orders be issued to Key LLC in the amount of \$200,849.30 each for the repair of Virililia Road bridges SA45-07 and SA45-048. Both bridges failed a recent State Aid inspection. Key LLC is the board-awarded term bidder for Bridge Construction and Repair; therefore, no additional bidding is required for the project.

I recommend that the board authorize me to issue two purchase orders to Key LLC in the amount of \$200,849.30 each for the repair of Virililia Road bridges SA45-07 and SA45-048.

Sincerely,


Hardy Crunk
Purchase Clerk

Attachments: Requisition 0180122 and quote from Key for bridge SA45-048
Requisition 0180123 and quote from Key for bridge SA45-047

Requisition 0180122 Date 12/ 8/2017
MADISON COUNTY
P O BOX 608
CANTON, MS. 39046
(601)859-8241 (601)948-3897 JX
REFER TO PURCHASING OFFICE

ROAD DEPARTMENT
AMBER POPE

Vendor: 14203
KEY, LLC
P O BOX 590

Ship To: VIA: BEST WAY
DEPARTMENT OF ROAD MANAGEMENT
3137 SOUTH LIBERTY STREET
CANTON, MS 39046


MADISON MS 39130

Quantity	Description of Supplies, Equip, Srvc	Unit Cost	EA	Extended
1.00	160300525 BRIDGE REPLACEMENT	200849.30	EA	200849.30
:	:VIRLILIA ROAD	:	:	:
:	:SA 45-048	:	:	:

Total

\$200,849.30

Approved By: _____

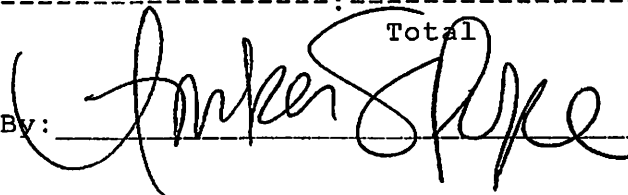

Requisition 0180122 Date 12/ 8/2017
 MADISON COUNTY
 P O BOX 608
 CANTON,MS. 39046
 (601)859-8241 (601)948-3897 JX
 REFER TO PURCHASING OFFICE

ROAD DEPARTMENT
 AMBER POPE

Vendor: 14203
 KEY, LLC
 P O BOX 590


Ship To: VIA: BEST WAY
 DEPARTMENT OF ROAD MANAGEMENT
 3137 SOUTH LIBERTY STREET
 CANTON, MS 39046

MADISON MS 39130

Quantity	Description of Supplies, Equip, Srvc	Unit Cost		Extended
1.00	:160300525 VIRLILIA ROAD BRIDGE :SA 45-048 :MOBILIZATION	5000.00	EA:	5000.00
2.00	:160300525 REMOVE RESET & GROUT 19'	3450.00	EA:	6900.00
2.00	:160300525 REMOVE RESET : & GROUT INTERMEDI	3450.00	EA:	6900.00
1596.00	:160300525 REMOVE RESET : & GROUT 19' PRECA :SPAN	16.50	LF:	26334.00
1105.00	:160300525 FURNISH & DRIVE H PILING:	63.00	LF:	69615.00
20.00	:160300525 EXTRACT & REMOVE TIMBER :	2315.00	EA:	46300.00
20.00	:160300525 REMOVE TIMBER PILES FROM:	155.00	EA:	3100.00
50.00	:160300525 EXCAVATION WORK :	17.35	CY:	867.50
50.00	:160300525 REMOVAL OF MISC MATERIAL:	98.45	TN:	4922.50
177.33	:160300525 REMOVAL OF : ASPHALT PAVEMENT FR	32.5506	SY:	5772.20
1.00	:160300525 FURNISH & DRIVE TEST PIL:	7535.00	EA:	7535.00
150.00	:160300525 FURNISH RIP RAP IN PLACE:	81.15	EA:	12172.50
2520.00	:160300525 FURNISH AND : INSTALL TIMBER HEA	2.155	BF:	5430.60

Total \$200,849.30

Approved By: _____

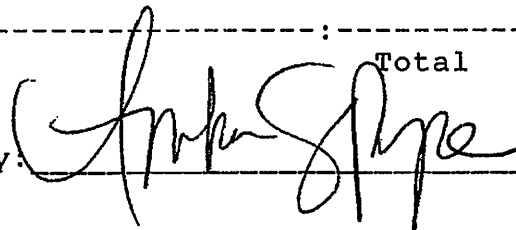

Virilla Road - #48

SA-45-048

ITEM	SOURCE	UNIT	QUANTITY	UNIT COST	COST
Mobilization	Key, LLC	LS	1.00	\$ ✓ 5,000.00	\$ 5,000.00
Remove, Resel & Grout 19-foot abutment cap	Key, LLC	EA	2.00	\$ ✓ 3,450.00	\$ 6,900.00
Remove, Resel & Grout 19-foot Intermediate cap	Key, LLC	EA	2.00	\$ ✓ 3,450.00	\$ 6,900.00
Remove, Resel & Grout 19-foot Precast Bridge Span	Key, LLC	SF	1,598.00	\$ ✓ 16.50	\$ 28,334.00
Furnish & Drive H Piling	Key, LLC	LF	1,105.00	\$ ✓ 63.00	\$ 69,615.00
Extract and Remove Timber Piles	Key, LLC	EA	20.00	\$ ✓ 2,315.00	\$ 46,300.00
Remove Timber Piles from job site	Key, LLC	EA	20.00	\$ ✓ 155.00	\$ 3,100.00
Excavation Work	Key, LLC	CY	50.00	\$ ✓ 17.35	\$ 867.50
Removal of Miscellaneous Material from job site	Key, LLC	TON	50.00	\$ ✓ 98.45	\$ 4,922.50
Removal of Asphalt Pavement from Bridge Deck	Key, LLC	SY	177.33	\$ ✓ 32.55	\$ 5,772.20
Furnish & Drive Test Pile	Key, LLC	EA	1.00	\$ ✓ 7,535.00	\$ 7,535.00
Furnish Rip-Rap In Place	Key, LLC	EA	150.00	\$ ✓ 81.15	\$ 12,172.50
Furnish & Install Timber Head Walls	Key, LLC	BF	2,520.00	\$ ✓ 2.155	\$ 5,430.60

TOTAL PROJECT COST = \$ 200,849.30

Key, LLC shall excavate for removal and replacement of abutments

Madison County to handle all backfill, subgrade and asphalt

Madison County to handle all Maintenance of Traffic

Madison County to handle all removal or relocation of powerlines & utilities in conflict with construction (per OSHA guidelines)

Quantity of pile is based on the following

Bent #1	4 ea (1 pile excluded for test pile)	45 lf	180 lf
Bent #2	5 ea	45 lf	225 lf
Bent #3	5 ea	45 lf	225 lf
Bent #4	5 ea	45 lf	225 lf
Wings	10 ea	25 lf	250 lf
		Total	1105 lf

Requisition 0180123 Date 12/ 8/2017
 MADISON COUNTY
 P O BOX 608
 CANTON, MS. 39046
 (601)859-8241 (601)948-3897 JX
 REFER TO PURCHASING OFFICE

ROAD DEPARTMENT
 AMBER POPE

Vendor: 14203
 KEY, LLC
 P O BOX 590

Ship To: VIA: BEST WAY
 DEPARTMENT OF ROAD MANAGEMENT
 3137 SOUTH LIBERTY STREET
 CANTON, MS 39046


MADISON MS 39130

Quantity	Description of Supplies, Equip, Srvc	Unit Cost		Extended
1.00	:160300525 VIRLILIA ROAD BRIDGE :SA 45-047 :MOBILIZATION	5000.00	EA:	5000.00
2.00	:160300525 REMOVE RESET & GROUT 19'	3450.00	EA:	6900.00
2.00	:160300525 REMOVE RESET : & GROUT 19' INTER :CAP	3450.00	EA:	6900.00
1596.00	:160300525 REMOVE RESET : & GROUT 19' PRECA :SPAN	16.50	SF:	26334.00
1105.00	:160300525 FURNISH & DRIVE H PILE	63.00	LF:	69615.00
20.00	:160300525 EXTRACT & REMOVE TIMBER	2315.00	EA:	46300.00
20.00	:160300525 REMOVE TIMBER PILES FROM:	155.00	EA:	3100.00
50.00	:160300525 EXCAVATION WORK	17.35	CY:	867.50
50.00	:160300525 REMOVAL OF MISC MATERIAL:	98.45	TN:	4922.50
177.33	:160300525 REMOVAL OF : ASPHALT PAVEMENT FR	32.5506	SY:	5772.20
1.00	:160300525 FURNISH & DRIVE TEST PIL:	7535.00	EA:	7535.00
150.00	:160300525 FURNISH RIP RAP IN PLACE:	81.15	EA:	12172.50
2520.00	:160300525 FURNISH & INSTALL TIMBER:	2.155	BF:	5430.60

Total

\$200,849.30

Approved By:

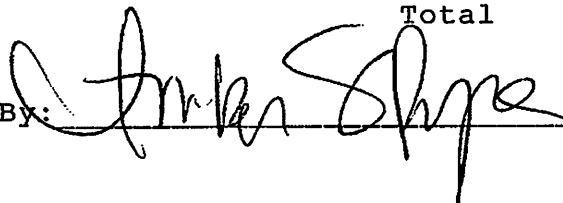

Virilla Road - #47

ITEM	SOURCE	UNIT	QUANTITY	UNIT COST	COST
Mobilization	Key, LLC	LS	1.00	\$ ✓ 5,000.00	\$ 5,000.00
Remove, Reset & Grout 19-foot abutment cap	Key, LLC	EA	2.00	\$ ✓ 3,450.00	\$ 6,900.00
Remove, Reset & Grout 19-foot Intermediate cap	Key, LLC	EA	2.00	\$ ✓ 3,450.00	\$ 6,900.00
Remove, Reset & Grout 19-foot Precast Bridge Span	Key, LLC	SF	1,598.00	\$ ✓ 16.50	\$ 26,334.00
Furnish & Drive H Piling	Key, LLC	LF	1,105.00	\$ ✓ 63.00	\$ 69,615.00
Extract and Remove Timber Piles	Key, LLC	EA	20.00	\$ ✓ 2,315.00	\$ 46,300.00
Remove Timber Piles from Job site	Key, LLC	EA	20.00	\$ ✓ 155.00	\$ 3,100.00
Excavation Work	Key, LLC	CY	50.00	\$ ✓ 17.35	\$ 867.50
Removal of Miscellaneous Material from Job site	Key, LLC	TON	50.00	\$ ✓ 98.46	\$ 4,922.50
Removal of Asphalt Pavement from Bridge Deck	Key, LLC	SY	177.33	\$ ✓ 32.56	\$ 5,772.20
Furnish & Drive Test Pile	Key, LLC	EA	1.00	\$ ✓ 7,535.00	\$ 7,535.00
Furnish Rip-Rap In Place	Key, LLC	EA	150.00	\$ ✓ 81.16	\$ 12,172.50
Furnish & Install Timber Head Walls	Key, LLC	BF	2,620.00	\$ ✓ 2.165	\$ 5,430.60

TOTAL PROJECT COST = \$ 200,849.30

Key, LLC shall excavate for removal and replacement of abutments

Madison County to handle all backfill, subgrade and asphalt

Madison County to handle all Maintenance of Traffic

Madison County to handle all removal or relocation of powerlines & utilities in conflict with construction (per OSHA guidelines)

Quantity of pile ls based on the following

Bent #1	4 ea (1 pile excluded for test pile)	45 lf	180 lf
Bent #2	5 ea	45 lf	225 lf
Bent #3	5 ea	45 lf	225 lf
Bent #4	5 ea	45 lf	225 lf
Wings	10 ea	25 lf	250 lf
		Total	1105 lf