BOARD OF SUPERVISORS

MADISON COUNTY, MISSISSIPPI

Department of Engineering Tim Bryan, P.E., PTOE, County Engineer 3137 South Liberty Street, Canton, MS 39046 Office (601) 855-5582 FAX (601) 859-5857

MEMORANDUM

November 17, 2025

To: Casey Brannon, Supervisor, District I Trey Baxter, Supervisor, District II Gerald Steen, Supervisor, District III Karl Banks, Supervisor, District IV Paul Griffin, Supervisor, District V

From: Tim Bryan, P.E., PTOE County Engineer

Re: Telepak Networks/D.B.A. Cspire Utility Permit County Road Name, Bridge Water Drive

The Engineering Department recommends approval for Cspire to do construction of underground fiber-optic internet utility, by method of directional bore, within the right of way county-maintained roads listed below.

- Bridge Water Drive
- Benners Lane
- Millbridge Drive
- Erickson Lane
- Sudduth Cove

Revised: 2/14/2019



PERMIT APPLICATION FOR THE CONSTRUCTION OR ADJUSTMENT OF A UTILITY WITHIN COUNTY ROAD RIGHT-OF-WAY

<u> Utility Information:</u>	Utility Name:			
Address:			City/State/Zip:	
Contact Person:			Contact's Phone:	
Project Information:				se Appendix 1 for additional descriptions,
Beginning Location:				
Length of Project:	Sec	ction:	Township:	Range:
Description of Work: _				
Check Box if Appendi	x 1 is to be included as a	part of this App	lication	

Whereas the above stated Utility makes application to the **Madison County Board of Supervisors** for a Construction Permit. Attached hereto are drawings and plans for the construction of the above facilities located within Madison County owned public rights-of-way. Once stamped by the Madison County Engineering Department, these plans shall not be changed or altered without written approval of the County Engineer, or his representative. A copy of the approved permit and plans shall be on-site at all times during construction.

The Applicant Utility shall comply with all policies, procedures and construction practices as outlined in *A Policy for The Accommodation of Utility Facilities within the Right-of-Way of all Public County Roads* (hereinafter referred to as the "Policy"), as adopted on November 1, 2005, by the **Madison County Board of Supervisors**, and which is hereby made a part of this Application Agreement.

If facilities are to be located within the Rights-of-Way of the County-Federal or State Aid System, Applicant Utility also agrees to comply with applicable provisions of *S.O.P. No. SA II-2-8, Accommodation of Utilities on Rights-of-Way,* issued by the State Aid Engineer and dated July 1, 2005.

The Applicant Utility understands and agrees that, except as herein granted, no right, title, claim, or easement to said road right-of-way is granted by the issuance of this permit. If this Utility is listed in the general provisions of the Policy, it will be adjusted to comply with same without cost to the County, unless the variance from the Policy has been approved by the granting of the Permit pursuant to this Application.

The Applicant Utility further understands that the Utility's engineering, plant, or other personnel will be responsible for the staking and construction supervision of the work set out above and as shown on the attached plans. If work impacts traffic in any way, the appropriate traffic control shall be installed per the *Manual of Uniform Traffic Control Devices*, Latest Edition.

The Applicant Utility understands that the County Engineer, or his representative, may issue a Stop Work Order at any time if it is deemed that site conditions are not suitable for construction or if any of the requirements of this permit are not being met.

Many County Roads have variable Rights-of-Way and/or no Right-of-Way at all and are maintained under a Prescriptive Easement. It is the sole responsibility of the Applicant Utility to verify the existence and limits of public rights-of-way. If none exists, it is the

responsibility of the Applicant Utility to acquire an easement for their Facilities from the applicable property owner(s). Madison County in no way verifies the limits of Right-of-Way as shown on the permit application.

The Applicant Utility shall be responsible for all future maintenance and repair of the facilities installed under this permit. The Applicant Utility shall make future adjustments to, or relocate, the facilities located within road or highway right-of-way when required for road or highway widening or other road or highway construction at no cost to Madison County. The Applicant Utility shall relocate said utilities within sixty (60) days of notification by County by registered mail, return receipt requested, unless otherwise designated by the County Engineer. Further, any maintenance, repair, or construction shall be done in such a manner as to occasion no unreasonable interference with the normal flow and safety to traffic and at the expense of the utility company. When reasonable care has been taken to locate said utility facilities within the right-of-way, the Applicant Utility understands that any damages caused by routine maintenance and construction by County forces shall be borne by the Applicant Utility.

The Applicant Utility further agrees to indemnify and hold Madison County harmless for any and all claims, accidents, damages, liabilities and expenses occasioned wholly, or in part, by any act or omission of applicant, its agents or employees. In case County shall, without fault on its own part, be made a party to any litigation commenced by or against applicant, then applicant shall protect and hold County harmless, and shall pay all costs, expenses and reasonable attorney's fees incurred or paid by County in connection with said litigation.

All underground facilities shall be installed at a depth equal to or greater than 48" below the lowest adjacent grade.

WITNESS the signature of the Applicant this the _____ day of __ (Applicant Signature) Title:

Applicant must be an employee of the Utility named in this application. The Madison County Board of Supervisors will not recognize Note: a Contractor, Subcontractor, Agent, or Consulting Engineer as the Applicant. Utility Company shall be fully responsible for all work performed under this application.

I, or my authorized representative, have reviewed this application and determined that the drawing, sketches, and plans submitted by the Applicant meet the requirements of A Policy for The Accommodation of Utility Facilities within the Right-of-Way of all Public County Roads.


All pipes carrying liquid shall be encased under County maintained roads.

APPROVED

AGREED TO AND APPROVED BY:	By Tim Bryan at 9:05 am, Nov 26, 2025 Tim Bryan, P.E. County Engineer		
Madison County Board President	Date:		
ENTERED INTO THE MINUTES OF THE BOARD	OF SUPERVISORS OF MADISON COUNTY, MISSISSIPPI ON THIS		
DAY OF	_, 20		


Appendix 1

County Road Name:				
Beginning Location:		Ending Location:		
Length of Project: Section		Township:		
Description of Work:				
County Road Name:				
Beginning Location:	<u> </u>	Ending Location:		
Length of Project:	Section:	Township:	Range:	
Description of Work:				
County Road Name:				
Beginning Location:		Ending Location:		
Length of Project:	Section:	Township:	Range:	
Description of Work:				
County Road Name:				
Beginning Location:	<u> </u>	Ending Location:		
Length of Project:	Section:	Township:	Range:	
Description of Work:				
County Road Name:				
Beginning Location:		Ending Location:		
Length of Project:	Section:	Township:	Range:	
Description of Work:				

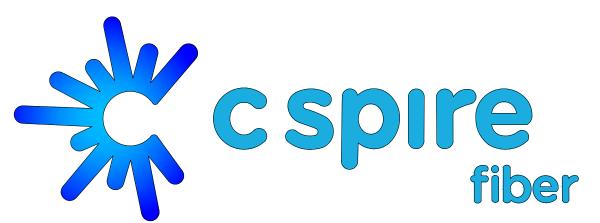

MILLBRIDGE OF LAKE CAROLINE

CITY OF RICHTON
MADISON COUNTY, MISSISSIPPI
12/04/24

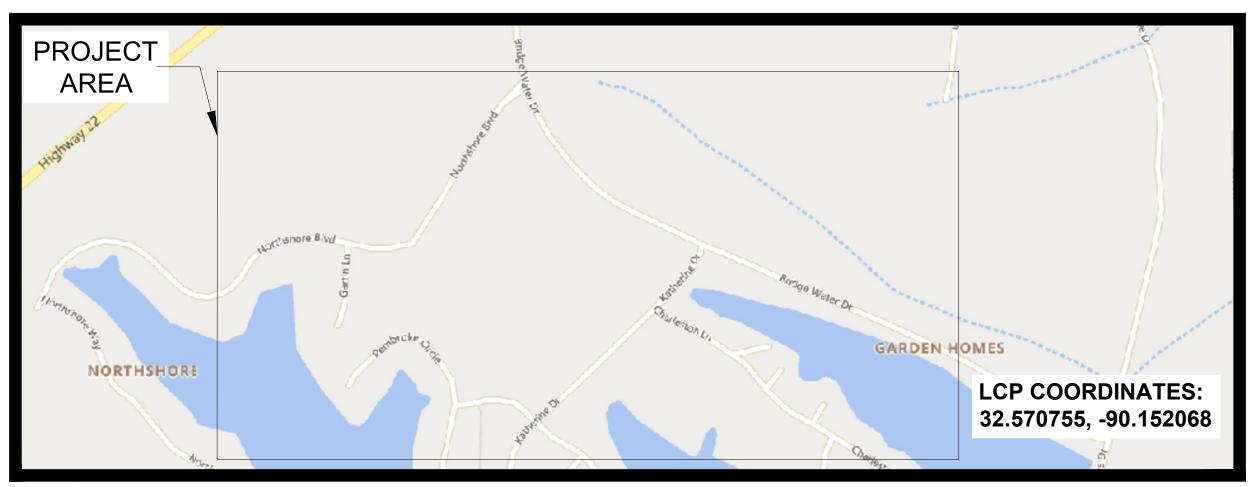

PERMITS REQUIRED

CITY:

N/A

N/A

COUNTY: YES

MDOT: N/A

FEDERAL: N/A

RAILROAD: N/A

PRIVATE R/W: N/A

MISC:

HOUSE COUNT

0

80

80


OCCUPIED: VACANT :

TOTAL:

MILEAGE 1.43 LOTS PER MILE 56.04

PREPARED BY:



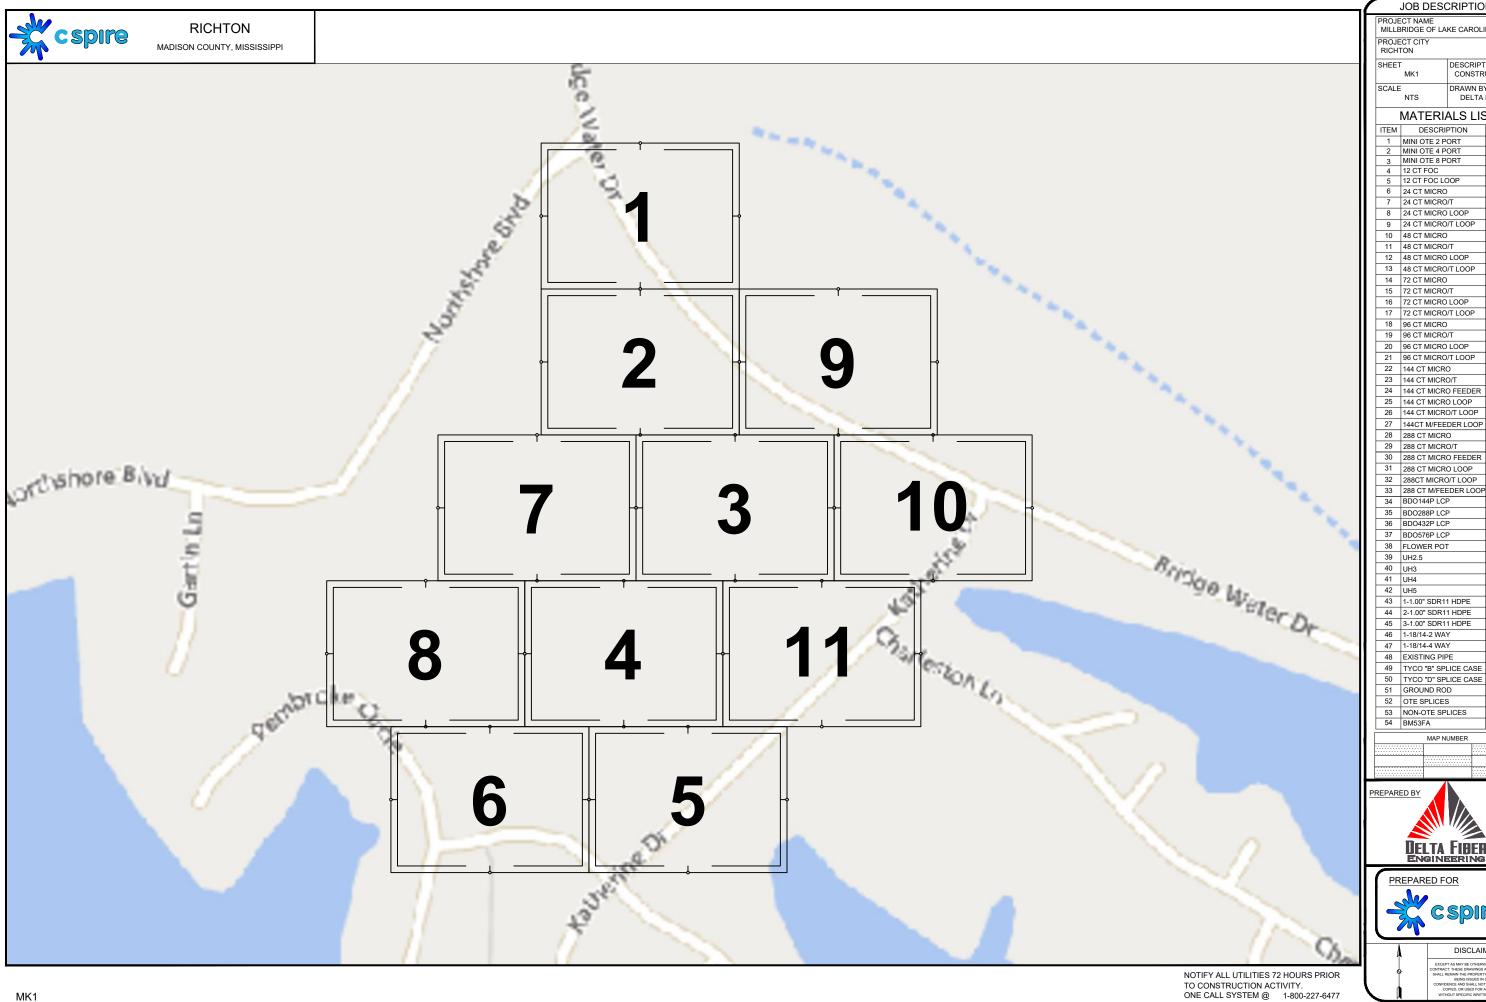

JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE DESCRIPTION CONSTRUCTION DRAWN BY DELTA FIBER MATERIALS LIST ITEM DESCRIPTION QTY. 9 24 CT MICRO/T LOOP 13 48 CT MICRO/T LOOP 17 72 CT MICRO/T LOOP 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOF









MADISON COUNTY, MISSISSIPPI


FLOWER POT (9.5x12)

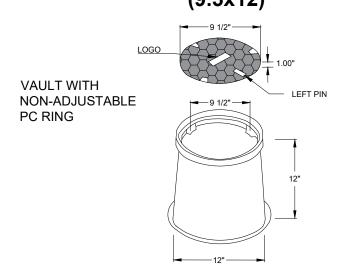


UH-2.5 (13x24x18)

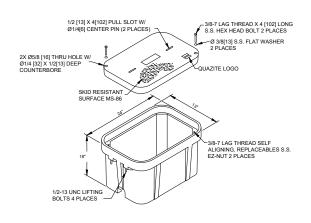

UH-3 (24x36x24)

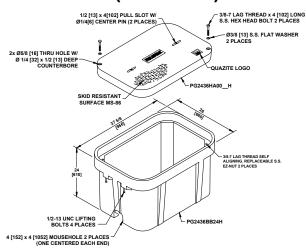


TYPICAL VAULT HAND HOLE INSTALLATION PROCEDURES AT BUILDING ENTRIES

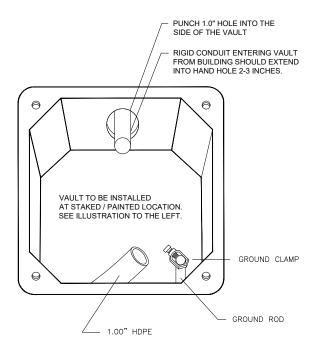

VAULT INSTALLATION LOCATION WILL BE MARKED BY A STAKE AND/OR PAINT. CSPIRE/ OSP WILL INSTALL CONDUIT 8" UNDERGROUND TO DESIRABLE VAULT LOCATION.

TYPICAL VAULT INSTALLATION

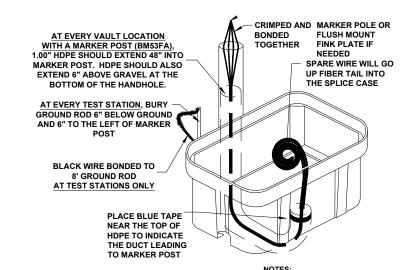

PIGTAILS ARE TO BE INSTALLED AT TEST STATION (T.S.) ONLY.

OF 15,000 LBS. [66,720 N] OVER A 10 [25AND MUST PASS A MIN. STATIC TEST LC
AND MUST PASS A MIN. STATIC TEST LC

HANDHOLES ARE TO BE INSTALLED A MINIMUM OF THREE FEET FROM ANY UTILITY OR POWER POLE.

BOXES (Nestable)

DESCRIPTION

VAULT 24x36x24

VAULT 13x24x18

VAULT (ROUND) 9.5x12

DESIGN/TEST LOAD# 20,000 LBS 20,000 LBS 20,000 LBS

DIMENSIONS ARE IN INCHES OR MILLIMETERS IN BRACKETS UNLESS OTHERWISE NOTED.

48" DOC in all locations on Madison County ROW

- 1. THIS ASSEMBLY IS RATED FOR A STATIC DESIGN LOAD OF 15,000 LBS. [66,720 N] OVER A 10 [254] X 10 [254] AREA AND MUST PASS A MIN. STATIC TEST LOAD OF 20,00 LBS. I100.085 NI.
- 2. ALL ENCLOSURES, BOXES AND COVERS, ARE REQUIRED TO CONFORM TO ALL TEST PROVISIONS OF ANSI/SCTE 77 2007 "SPECIFICATION FOR UNDERGROUND ENCLOSURE INTEGRITY" AS MANUFACTURED BY QUAZITE OR EQUIVALENT WITH TELEPAK NETWORK'S ENGINEER'S SIGNED APPROVAL. THE COVERS MUST BE RATED FOR TIER 15 APPLICATIONS AND BOXES RATED FOR TIER 22 APPLICATIONS AND IN NO ASSEMBLY CAN THE COVER DESIGN LOAD EXCEED THE DESIGN LOAD OF THE BOX. ALL COMPONENTS IN AN ASSEMBLY (BOX & COVER) ARE MANUFACTURED USING MATCHED SURFACE TOOLING. ALL COVERS ARE REQUIRED TO HAVE A MINIMUM COEFFICIENT OF FRICTION OF 0.50 IN ACCORDANCE WITH ASTM C 1028 AND HAVE TIER 15 AND "TELEPAK NETWORKS 800-342-3716" EMBOSSED ON THE TOP SURFACE. ALL COVER BOLTS TO BE SELF-CLEANING AUGER BOLT

ALL CABLE WILL BE PLACED BY METHOD OF DIRECTIONAL BORE MIN 2' OFF ROW OR EASEMENT @ 42" DOC UNLESS OTHERWISE NOTED.

NOTIFY ALL UTILITIES 72 HOURS PRIOR TO CONSTRUCTION ACTIVITY. ONE CALL SYSTEM @ 1-800-227-6477

JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE RICHTON DESCRIPTION CONSTRUCTION TYPICALS SCALE DRAWN BY NTS DELTA FIBER MATERIALS LIST DESCRIPTION MINI OTE 2 PORT 2 MINI OTE 4 PORT MINI OTE 8 PORT 12 CT FOC 5 12 CT FOC LOOF 6 24 CT MICRO 7 24 CT MICRO/T 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 10 48 CT MICRO 11 48 CT MICRO/T 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 14 72 CT MICRO 15 72 CT MICRO/T 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 18 96 CT MICRO 19 96 CT MICRO/ 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 22 144 CT MICRO 23 144 CT MICRO/T 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOF 27 144CT M/FEEDER LOOP 28 288 CT MICRO 29 288 CT MICRO/T 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOF 34 BDO144P LCP 35 BDO288P LCP 36 BDO432P LCP 37 BDO576P LCP 38 FLOWER POT 39 UH2.5 40 UH3 41 UH4 42 UH5 43 1-1.00" SDR11 HDPE 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 46 1-18/14-2 WAY 47 1-18/14-4 WAY 48 EXISTING PIPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 51 GROUND ROD 52 OTE SPLICES 53 NON-OTE SPLICES 54 BM53FA





DISCLAIMER

EXCEPT AS MAY SE OTHERWISE PROVIDED BY CONTINCT. THESE DOWNWES AND SPECIFICATION SHALL REPORT AS MAY SHALL NOT SE REPRODUCED. COMPEDIACE AND SHALL NOT SE REPRODUCED. COMPEDIA OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WITHTON FERRISSION.



MADISON COUNTY, MISSISSIPPI

SYMBOLS KEY

			PROPERTY LINE ————
DIRECTIONAL BORE	RAILROAD TRACKS		EDGE OF PAVEMENT —EOP——EOP—
AERIAL CABLE	AUXILLARY TRACKS	50'	BACK OF CURB ——BOC——BOC——WHITE LINE ——WII ——WII ——WII ——WII ——BOC——BOC——BOC——BOC——BOC——BOC——BOC——BO
PLOW OR BURIED CABLE	CENTERLINE		RIGHT-OF-WAY LINE ————————————————————————————————————
DIRECTIONAL BORE 5" HDPE	WOOD LINE		North-St-WAT LINE
PVC OR SPLIT PVC CONDUIT	DITCH LINE		TAX DISTRICT BOUNDARY T038-42
ASTMA 139 GRADE B STEEL	TOD OF CLODE		51762A
JACK AND BORE	TOP OF SLOPE TOE OF SLOPE	TOP OF SLOPE	\(\lambda 2^n \rangle
CORE BORE		TOE OF SLOPE	PROBE (DEPTH AS INDACATED)
EXISTING TELEPAK CABLE	AERIAL UTILITY (ELECTRIC) UNDERGROUND UTILITY (TELEPHONE)	E	P.T.F.
	(PARTIAL CAPSULE INDICATES COVER DEPTH IN INCHES)	CAUTION CAUTION CAUTION	PERMIT TRACKING FORM IDENTIFIER 187
HANDHOLE	CAUTION NOTES	GAS X-ING WATER X-ING WATER X-ING	
HANDHOLE (CABLE IN HDPE)	WATER VALVE	Ø M	DELTA FIBER TYPICAL LINETYPES
HH (CABLE IN PVC CONDUIT)	WATER METER	\boxplus	DELTA FIBER TYPICAL LINETTPES
	GAS VALVE	\Leftrightarrow	1-1.00 HDPE (1)1.00 HDPE (1)1.00 HDPE (1)1.00 HDPE (1)1.00 HDPE (1)1.00 HDPE (1)1.00 HDPE
HANDHOLE (CABLE IN GSP CONDUIT)	FIRE HYDRANT	- \$	2-1.00 HDPE ——(2)1.00 HDPE ——(2)1.00 HDPE ——(2)1.00 HDPE ——(2)1.00 HDPE ——(3)1.00
FLOWER POT	STORM DRAIN	===	18/14 4 WAY ——18/14 4 WAY ——18
MANUALE (CARLE INLIPRE)	_		18/14 2 WAY — 18
MAINHOLE (CABLE IN HDPE)	SEWER MANHOLE	S	EXISTENCE
MANHOLE (CABLE IN PVC CONDUIT)	CULVERT	>	12CT FOC
MANHOLE (CABLE IN BSP/GSP CONDUIT)	POW ONLY TOTAL		24CT MICRO — 24CT MICRO — 24CT MICRO — 24CT MICRO — 48CT MICRO
H-FRAME	BOX CULVERT		72CT MICRO — 72CT
BORE PIT	CITY, COUNTY OR STATE BOUNDARY LINE		96CT MICRO — 144CT M
LIGHTNING ARRESTOR LIGHTNING ARRESTOR	R.R. CROSSING SIGNAL ್ಲ್ರ್ ಪ್ರಿಕ	PUSH BRACE 30'-5-84 PB	288CT MICRO — 28
	₹&5		24CT MICRO/T24CT MICRO-T24CT MICRO-T24CT MICRO-T24CT MICRO-T
AC/DC FILTER PROTECTION AC/DC FILTER PROTECTION AC/DC FILTER PROTECTION	R.R. SIGNAL ARM	JOINT USE POLE	48CT MICRO/T48CT MICRO-T48CT MICRO-T48CT MICRO-T
ALUMINUM HUB STYLE MARKER	U/G TRANSFORMER	TELEPHONE POLE	72CT MICRO/T — 72CT MICRO-T — 72CT MICRO-T — 72CT MICRO-T — 96CT M
STEEL MARKER	STREET/SIGNAL LIGHT	CONCRETE POLE ©	144CT MICRO/T144CT MICRO-T144CT MICRO-T144CT MICRO-T
FLAT COMPOSSUITE MARKED	DARKING METER		288CT MICRO/T288CT MICRO-T288CT MICRO-T
FLAT COMPOSOLITE MARKER	PARKING METER △	STEEL POLE S	RIGHT OF WAY
TUBULAR MARKER	STEEL/WOOD POST O	POWER POLE X	DRIVEWAY —
-	SIGN q	TRANSFORMER POLE	EDGE OF PAVEMENT
RIGHT-OF-WAY MARKER	FENCE LINE	<u>~</u> 3	CENTERLINE OF ROAD ———
RIGHT-OF-WAY PIN	TELEPHONE/CATV PED ⊠	GROUND WIRE —	DROPS TO HOUSES — — — — — — — —
MILE DOST MADKED	TREE	- -	AERIAL IMAGES
MILE POST MARKER NOTE: DASHED = (NOT FOUND IN FIELD)	визн	BOND AND GROUND B&G	PROPERTY LINE ————————————————————————————————————
· ·	BUSH	· 	SIDEWALK —

ALL CABLE WILL BE PLACED BY METHOD OF DIRECTIONAL BORE MIN 2' OFF ROW OR EASEMENT @ 42" DOC UNLESS OTHERWISE NOTED.

NOTIFY ALL UTILITIES 72 HOURS PRIOR TO CONSTRUCTION ACTIVITY. ONE CALL SYSTEM @ 1-800-227-6477

JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE PROJECT CITY RICHTON SHEET DESCRIPTION CONSTRUCTION LEGEND SCALE DRAWN BY NTS DELTA FIBER MATERIALS LIST ITEM DESCRIPTION QTY. 1 MINI OTE 2 PORT 2 MINI OTE 4 PORT 3 MINI OTE 8 PORT 4 12 CT FOC 5 12 CT FOC LOOP 6 24 CT MICRO 7 24 CT MICRO/T 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 10 48 CT MICRO 11 48 CT MICRO/T 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 14 72 CT MICRO 15 72 CT MICRO/T 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 18 96 CT MICRO 19 96 CT MICRO/T 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 22 144 CT MICRO 23 144 CT MICRO/T 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 28 288 CT MICRO 29 288 CT MICRO/T 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOP 34 BDO144P LCP 35 BDO288P LCP 36 BDO432P LCP 37 BDO576P LCP 38 FLOWER POT 39 UH2.5 40 UH3 41 UH4 42 UH5 43 1-1.00" SDR11 HDPE 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 46 1-18/14-2 WAY 47 1-18/14-4 WAY 48 EXISTING PIPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 51 GROUND ROD 52 OTE SPLICES 53 NON-OTE SPLICES 54 BM53FA

PREPARED BY		
	$\langle \! \! \rangle$	
	<u> </u>	
<u>UE</u> I	LTA	FIBER




DISCLAIMER

EXCEPT AS MAY BE OTHERWISE PROVIDED BY COOKING THE PROPERTY OF CHITMEN FIRE BHALL RELIANS THE PROPERTY OF CHITMEN FIRE BHALL RELIANS THE PROPERTY OF CHITMEN FIRE BHALL BHALL



MADISON COUNTY, MISSISSIPPI

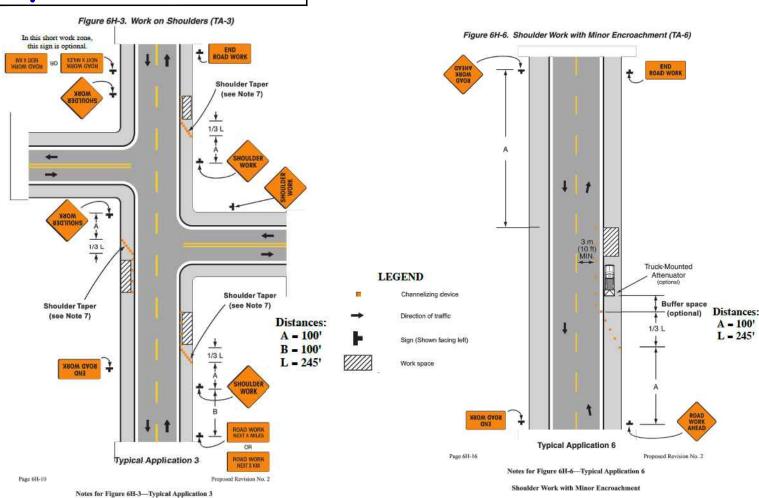

CONSTRUCTION SIGNS

FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS







NOTE:
W20-1 SIGNS ARE REQUIRED
WHEN SHOULDER WORK IS
PERFORMED WITH MINOR
ENCROACHMENT TO TRAVEL
LANE OR FLAGGING
OPERATIONS SEE TCP-2,
FIGURE 6H-6.

DISTANCE BETWEEN SIGNS				
ROAD TYPE A B C				
URBAN (35 MPH OR LESS)	100 FT.	100 FT.	100 FT.	
URBAN (40 - 70 MPH)	350 FT.	350 FT.	350 FT.	
RURAL	500 FT.	500 FT.	500 FT.	
EXPRESSWAY / FREEWAY	1000 FT.	1500 FT.	2640 FT.	

NOTES:

- 1. ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).
- 2. SIGNS ARE ONLY REQUIRED WHILE CONTRACTOR IS WORKING. THEY SHALL BE INSTALLED PRIOR TO WORK COMMENCING EACH DAY AND REMOVED WHEN WORK IS COMPLETED AT THE END OF THE DAY.
- 3. SIGNS MAY BE MOUNTED ON TRIPODS. THE LOCATION AND SPACING OF SIGNS, AS SHOWN ON THESE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.
- 4. CHANNELIZING DEVICES ARE NOT SHOWN ON THIS PLAN, BUT ARE REQUIRED AROUND ACTIVE WORK ZONES (SEE TCP-2).

WORK ON SHOULDERS

Work on Shoulder

GUIDANCE:

 A SHOULDER WORK sign should be placed on the left side of the roadway for a divided or one-way street only if the left shoulder is affected.

OPTION:

- 2. The workers symbol signs may be used instead of SHOULDER WORK signs.
- 3. The SHOULDER WORK AHEAD sign on an intersecting roadway may be omitted where drivers emerging from that roadway will encounter another advance warning sign prior to this activity area.
- 4. For short-duration operations of 60 minutes or less, all signs and channelizing devices may be eliminated if a vehicle with activated rotating lights or strobe lights is used.
- 5. Vehicle hazard warning signals may be used to supplement rotating lights or strobe lights.

STANDARD:

- 6. Vehicle hazard warning signals shall not be used instead of the vehicle's rotating lights or strobe lights.
- 7. When paved shoulders having a width of 2.4 m (8ft) or more are closed, at least one advance warning sign shall be used. In addition, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct vehicular traffic to remain within the traveled way.

SHOULDER WORK WITH MINOR ENCROACHMENT

GUIDANCE:

- All lanes should be a minimum of 3 m (10ft) in width as measured to the near face of the channelizing devices.
- The treatment shown should be used on a minor road having low speeds. For higher-speed traffic conditions, a lane closure should be used.

OPTION:

- For short-term use on low-volume, low-speed roadways with vehicular traffic that does not include longer and wider heavy commercial vehicles, a minimum lane width of 2.7 m (9ft) may be used.
- 4. Where the opposite shoulder is suitable for carrying vehicular traffic and of adequate width, lanes may be shifted by use of closely spaced channelizing devices, provided that the minimum lane width of 3 m (10ft) is maintained.
- 5. Additional advance warning may be appropriate, such as ROAD NARROWS sign.

- 6. Temporary traffic barriers may be used along with the work space.
- 7. The shadow vehicle may be omitted if a taper and channelizing devices are used.
- 8. A truck-mounted attenuator may be used on the shadow vehicle.
- For short-duration work, the taper and channelizing devices may be omitted if a shadow vehicle with activated rotating lights or strobe lights is used.
- 10. Vehicle hazard warning signals may be used to supplement rotating lights or strobe lights.

STANDARD:

11. Vehicle hazard warning signals shall not be used instead of the vehicle's rotating lights or strobe lights.

JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE PROJECT CITY RICHTON SHEET DESCRIPTION TRAFFIC CONTROL SCALE DRAWN BY DELTA FIBER MATERIALS LIST DESCRIPTION MINI OTE 2 PORT 2 MINI OTE 4 PORT MINI OTE 8 PORT 12 CT FOC 5 12 CT FOC LOOF 6 24 CT MICRO 7 24 CT MICRO/T 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 10 48 CT MICRO 11 48 CT MICRO/T 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 14 72 CT MICRO 15 72 CT MICRO/T 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 18 96 CT MICRO 19 96 CT MICRO/ 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 22 144 CT MICRO 23 144 CT MICRO/T 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 28 288 CT MICRO 29 288 CT MICRO/T 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FFFDER LOOF 34 BDO144P LCP 35 BDO288P LCP 36 BDO432P LCP 37 BDO576P LCP 38 FLOWER POT 39 UH2.5 40 UH3 41 UH4 42 UH5 43 1-1.00" SDR11 HDPE 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 46 1-18/14-2 WAY 47 1-18/14-4 WAY 48 EXISTING PIPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 51 GROUND ROD 52 OTE SPLICES 53 NON-OTE SPLICES 54 BM53FA

PREPARED BY

DELTA FIBER




DISCLAIMER

EXCEPT AS MAY BE CHIERWISE PROVIDED BY CONTROL OF THE CONTROL OF THE

NOTIFY ALL UTILITIES 72 HOURS PRIOR TO CONSTRUCTION ACTIVITY. ONE CALL SYSTEM @ 1-800-227-6477



MADISON COUNTY, MISSISSIPPI

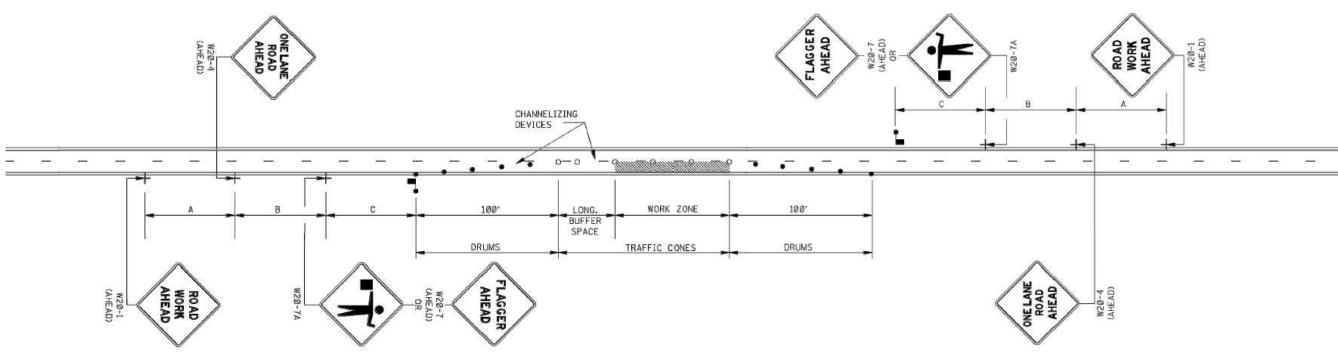


GENERAL NOTES:

1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE. FLAGGER STATIONS SHALL BE LOCATED SUCH THAT APPROACHING VEHICLES WILL HAVE SUFFICIENT DISTANCE TO STOP. VALUES IN STOPPING SIGHT DISTANCE COLUMN MAY BE USED AS A MINIMUM FOR THIS DISTANCE.

POSTED SPEED AND/OR DESIGN SPEED	MAXIMUM CHANNELIZING DEVICE SPACING (ft)		LONGITUDINAL BUFFER SPACE	STOPPING SIGHT
mph	TAPER	ALONG LANE LINE & WORK ZONE	(ft)	DISTANCE
25	20	50	55	155
30	20	60	85	200
35	20	70	120	250
40	20	80	170	305
45	20	90	220	360
50	20	100	280	425
55	20	110	335	495
60	20	120	415	570
65	20	130	485	645

NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.

- 2. ALL CHANNELIZING DEVICES SHALL BE A MINIMUM OF 28" IN HEIGHT.
- 3. DIAMOND SHAPED TRAFFIC CONTROL SIGNS SHALL BE A MINIMUM OF 36" x 36" AND BLACK COPY ON FLUORESCENT ORANGE SHEETING.
- 4. WHEN WORK ZONE IS NO LONGER NEEDED, ALL SIGNS SHALL BE COVERED OR REMOVED AND ALL CHANNELIZING DEVICES SHALL BE MOVED TO THE SHOULDER EDGE.
- 5. ADDITIONAL FLAGGERS MAY BE NEEDED AS DIRECTED BY THE ENGINEER.
- 6. WHEN WORK IS REQUIRED AT NIGHT, FLAGGER STATIONS SHALL BE ILLUMINATED.
- 7. CHANNELIZING DEVICE TYPES FOR: A. APPROACH AND EXIT TAPERS - RETROREFLECTIVE PLASTIC DRUMS B. ALONG LANE LINE AND WORK ZONE - TRAFFIC CONES (28" HEIGHT)
- 8. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.

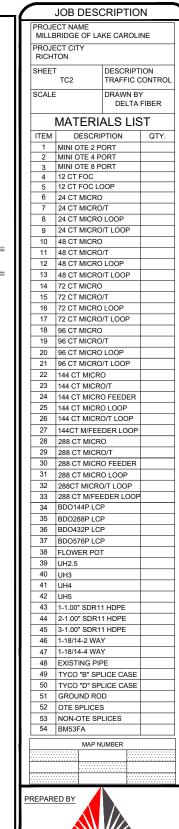





NOTIFY ALL UTILITIES 72 HOURS PRIOR TO CONSTRUCTION ACTIVITY. ONE CALL SYSTEM @ 1-800-227-6477



MADISON COUNTY, MISSISSIPPI

NOTE: EX HH LOCATED ON LAKE CAROLINE PROJECT. [GPS: 32.57076497, -90.15205780]

LAKE CAROLINE/BELLEVUE/NORTHSHORE (STA: 0+00) A) UH-4 (30x48x36) = EX. A) 72CT MICRO LOOP = 50' A) NON-OTE SPLICES = 12 [GPS: 32.57076497, -90.15205780]

NOTE: FIBERS 193-288 ARE BEING USED TO FEED MILLBRIDGE OF LAKE CAROLINE.

FIBERS 193-208 ARE BEING LEFT AT HH **MOLC - A15** FOR FUTURE USE.

FIBERS 1-192 ARE BEING LEFT AT MOLC - LCP FOR FUTURE USE.

0+15 | 0+00 PL HH MOLC - LCP (STA: 0+15 / 0+00) A) UH-5 (30x60x36) = 1 A) GROUND ROD = 1 A) BM53FA = 1 A) 1-1.00" SDR-11 HDPE = 15' A) 72CT MICRO = 15' (FEEDER) A) 72CT MICRO LOOP = 50' A) 96CT MICRO/T LOOP = 50' A) NON-OTE SPLICES = 300 A) BDO288P LCP = 1 [GPS: 32.570755, -90.152068] BRIDGEWATER DR MISSISSIPPI POWER & LIGHT **COMPANY**

SEE SHEET 2

ALL CABLE WILL BE PLACED BY METHOD OF DIRECTIONAL BORE MIN 2' OFF ROW OR EASEMEN @ 42" DOC UNLESS OTHERWISE NOTED.

NOTIFY ALL UTILITIES 72 HOURS PRIOR TO CONSTRUCTION ACTIVITY. ONE CALL SYSTEM @ 205-731-3200

JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE PROJECT CITY RICHTON SHEET DESCRIPTION CONSTRUCTION 001 SCALE DRAWN BY 1"=50' DELTA FIBER MATERIALS LIST ITEM DESCRIPTION 1 MINI OTE 2 PORT 2 MINI OTE 4 PORT 3 MINI OTE 8 PORT 4 12 CT FOC 5 12 CT FOC LOOP 6 24 CT MICRO 7 24 CT MICRO/T 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 10 48 CT MICRO 11 48 CT MICRO/T 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 14 72 CT MICRO 15 72 CT MICRO/T 100 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 18 96 CT MICRO 19 96 CT MICRO/T 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 22 144 CT MICRO 23 144 CT MICRO/T 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 28 288 CT MICRO 29 288 CT MICRO/T 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOF 34 BDO144P LCP 35 BDO288P LCP 36 BDO432P LCP 37 BDO576P LCP 38 FLOWER POT 39 UH2.5 40 UH3 41 UH4 42 UH5 43 1-1.00" SDR11 HDPE 15 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 46 1-18/14-2 WAY 47 1-18/14-4 WAY 48 EXISTING PIPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 51 GROUND ROD 52 OTE SPLICES 53 NON-OTE SPLICES 312 54 BM53FA


MAP NUMBER





DISCLAIMER

EXCEPT AS MAY BE OTHERWISE PROVIDED BY CONTRACT. THESE DRAWNINGS AND SPECIFICATIONS SHALL REAMS THE PROPERTY OF CENTRE FIBER BEING ISSUED IN STRICT CONFEDICA AND SHALL NOT BE REPRODUCED, COMED, OR USED FOR ANY PURPOSE WITHOUT SPECIFIC WHITTOUT PREMISSION.

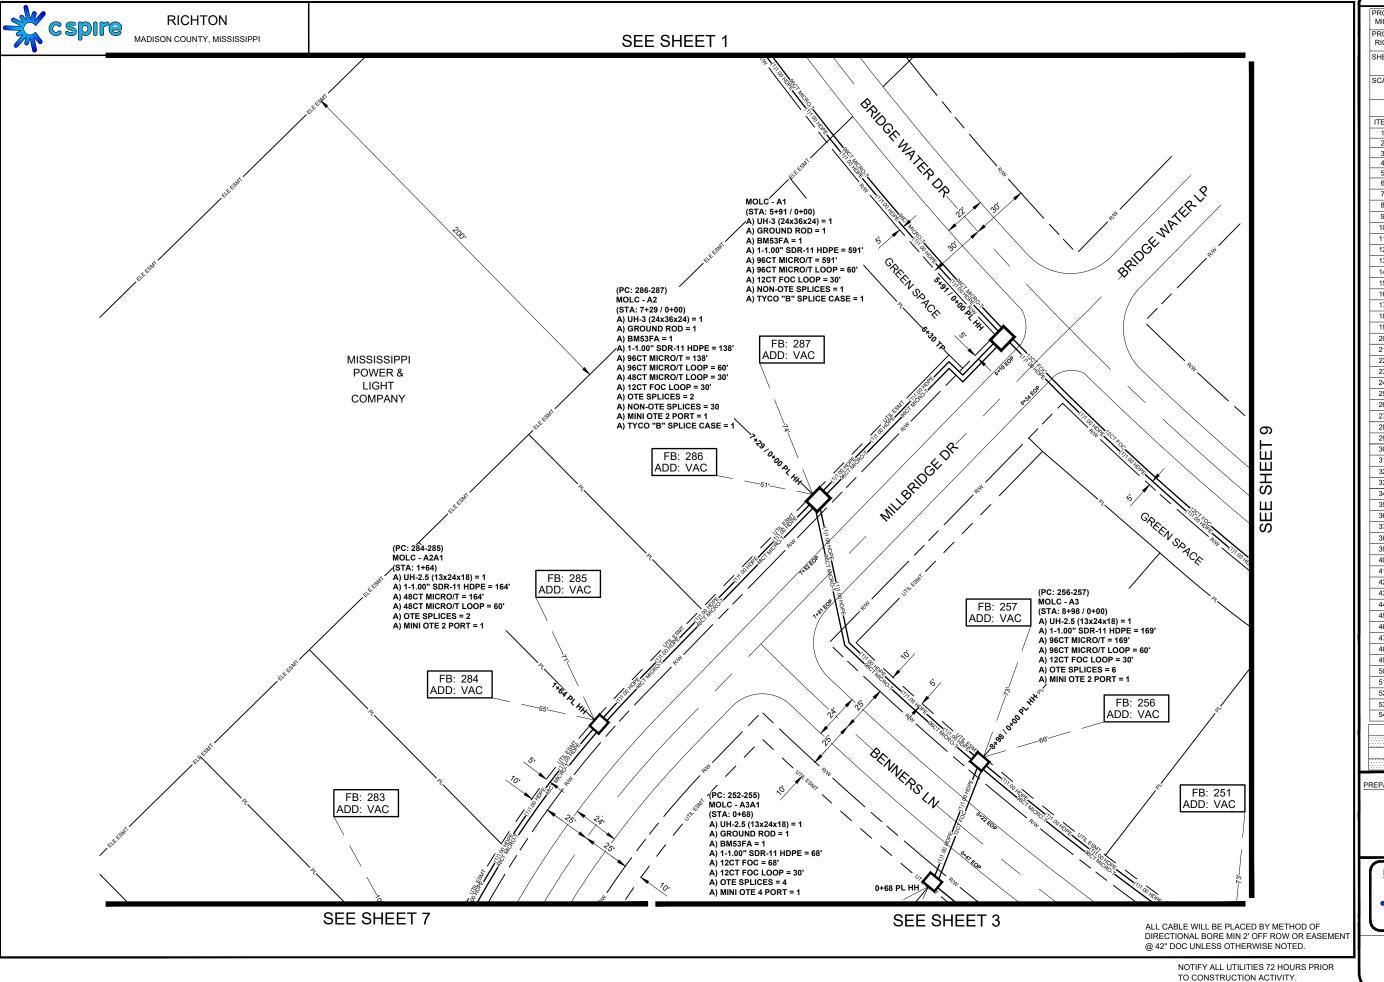

JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE RICHTON SHEET DESCRIPTION CONSTRUCTION 002 SCALE DRAWN BY 1"=50' DELTA FIBER MATERIALS LIST DESCRIPTION MINI OTE 2 PORT 2 MINI OTE 4 PORT MINI OTE 8 PORT 4 12 CT FOC 5 12 CT FOC LOOP 120 6 24 CT MICRO 7 24 CT MICRO/T 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 10 48 CT MICRO 11 48 CT MICRO/T 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 90 14 72 CT MICRO 15 72 CT MICRO/T 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 18 96 CT MICRO 19 96 CT MICRO/T 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 22 144 CT MICRO 23 144 CT MICRO/T 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 28 288 CT MICRO 29 288 CT MICRO/T 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOF 34 BDO144P LCP 35 BDO288P LCP 36 BDO432P LCP 37 BDO576P LCP 38 FLOWER POT 39 UH2.5 40 UH3 41 UH4 42 UH5 43 1-1.00" SDR11 HDPE 1130 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 46 1-18/14-2 WAY 47 1-18/14-4 WAY 48 EXISTING PIPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 51 GROUND ROD 52 OTE SPLICES 53 NON-OTE SPLICES 54 BM53FA PREPARED BY






ONE CALL SYSTEM @ 205-731-3200

DISCLAIMER

EXCEPT AS MAY BE OTHERWISE PROVIDED BY OF COMMENT AS MAY BE OTHERWISE PROVIDED BY ON COMMENT AND THE OTHER OTHER DEAD AS THE OTHER O

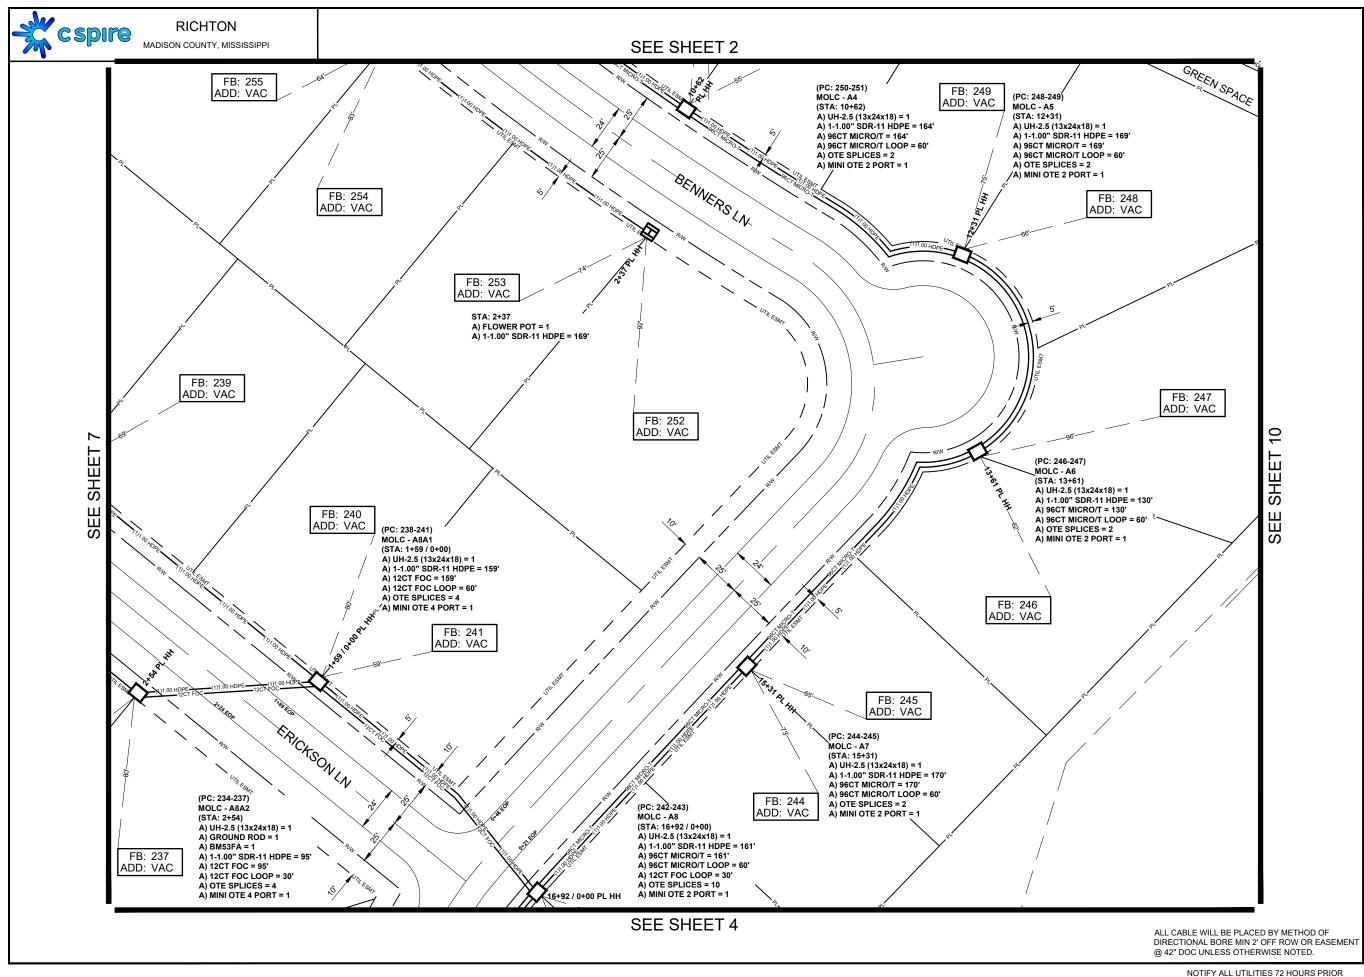

JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE RICHTON SHEET DESCRIPTION CONSTRUCTION 003 SCALE DRAWN BY 1"=50' DELTA FIBER MATERIALS LIST DESCRIPTION QTY. MINI OTE 2 PORT 2 MINI OTE 4 PORT MINI OTE 8 PORT 4 12 CT FOC 5 12 CT FOC LOOP 120 6 24 CT MICRO 7 24 CT MICRO/T 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 10 48 CT MICRO 11 48 CT MICRO/T 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 14 72 CT MICRO 15 72 CT MICRO/T 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 18 96 CT MICRO 19 96 CT MICRO/ 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 22 144 CT MICRO 23 144 CT MICRO/T 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 28 288 CT MICRO 29 288 CT MICRO/T 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOF 34 BDO144P LCP 35 BDO288P LCP 36 BDO432P LCP 37 BDO576P LCP 38 FLOWER POT 39 UH2.5 40 UH3 41 UH4 42 UH5 43 1-1.00" SDR11 HDPE 1217 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 46 1-18/14-2 WAY 47 1-18/14-4 WAY 48 EXISTING PIPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 51 GROUND ROD 52 OTE SPLICES 53 NON-OTE SPLICES 54 BM53FA

PREPARED BY

DELTA FIBER

ENGINEERING



DISCLAIMER

EXCEPT AS MAY BE OTHERWISE PROVIDED BY OF COMMENT OF THE PROPERTY OF CAPTRE FIRET.


SHALL FEEMAN THE PROPERTY OF CAPTRE FIRET.

COMPERCIAL AND SHALL NOT BE REPRODUCED.

WITHOUT SENCINC WHITE IN PRANSISSION.

TO CONSTRUCTION ACTIVITY.


ONE CALL SYSTEM @ 205-731-3200

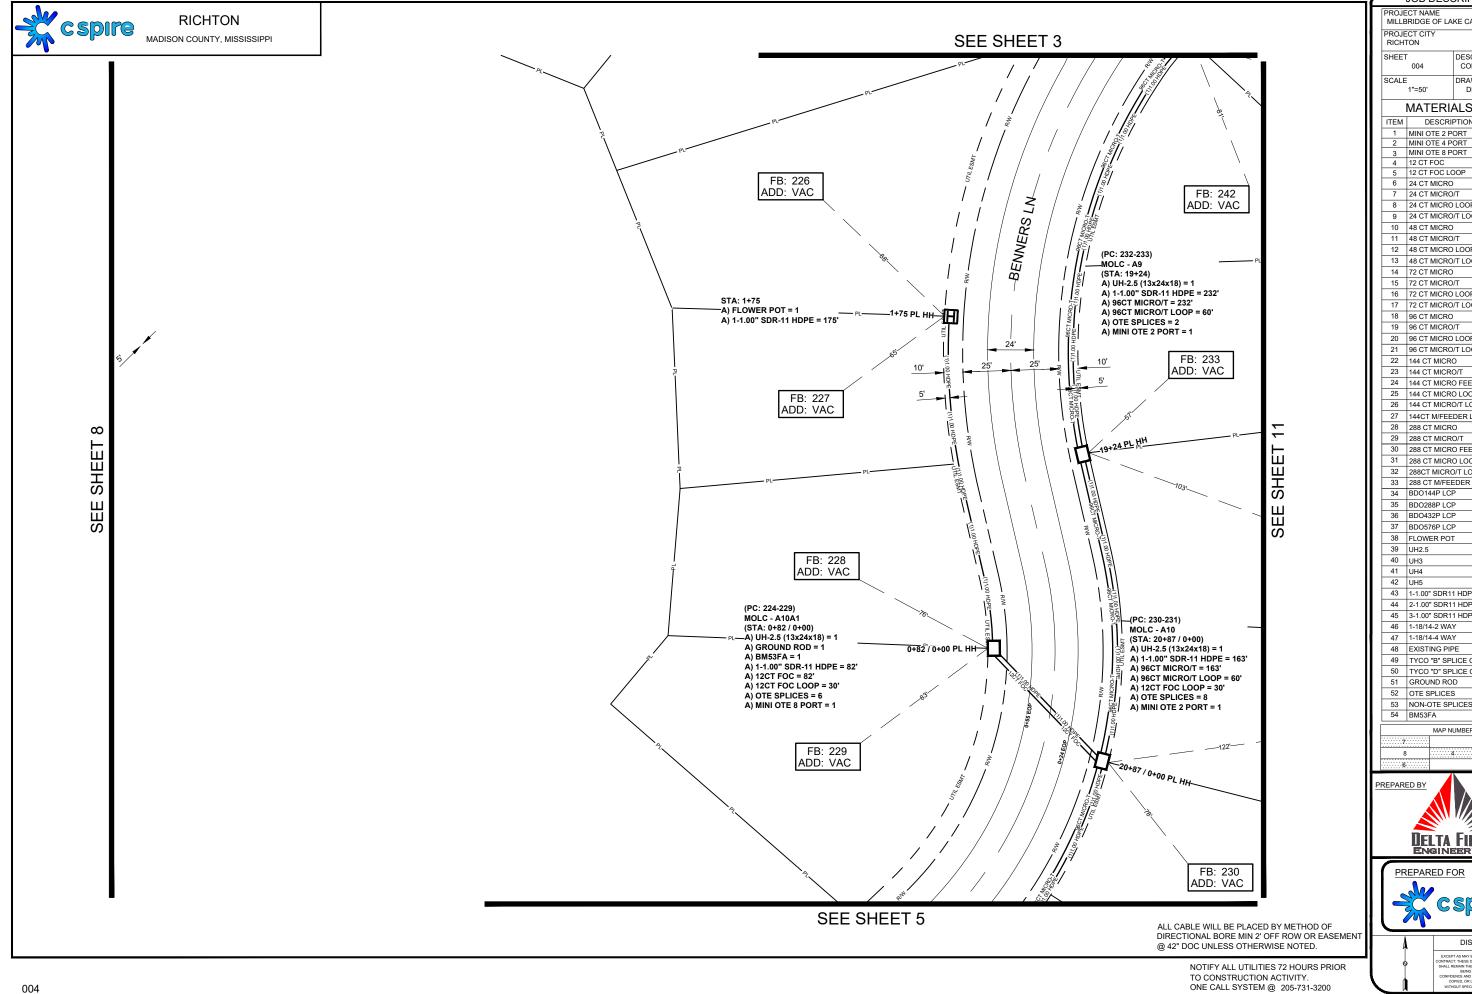

JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE DESCRIPTION CONSTRUCTION DRAWN BY DELTA FIBER MATERIALS LIST DESCRIPTION 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 30 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOF 43 1-1.00" SDR11 HDPE 1124 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 53 NON-OTE SPLICES





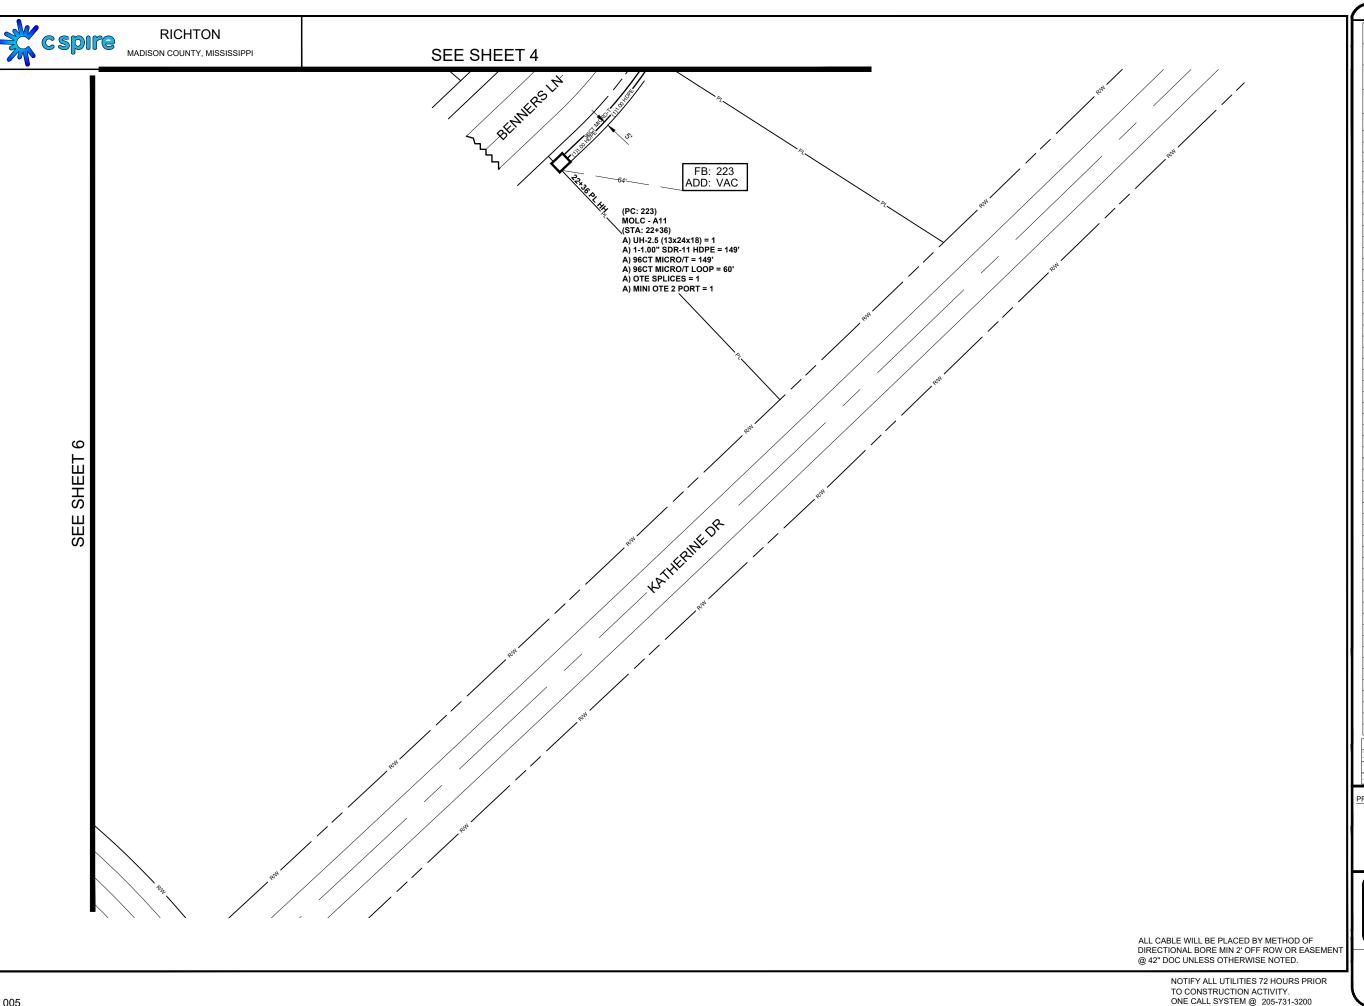


JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE PROJECT CITY RICHTON SHEET DESCRIPTION CONSTRUCTION 005 SCALE DRAWN BY 1"=50' DELTA FIBER MATERIALS LIST ITEM DESCRIPTION QTY. 1 MINI OTE 2 PORT 2 MINI OTE 4 PORT 3 MINI OTE 8 PORT 4 12 CT FOC 5 12 CT FOC LOOP 6 24 CT MICRO 7 24 CT MICRO/T 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 10 48 CT MICRO 11 48 CT MICRO/T 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 14 72 CT MICRO 15 72 CT MICRO/T 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 18 96 CT MICRO 19 96 CT MICRO/T 327 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 22 144 CT MICRO 23 144 CT MICRO/T 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 28 288 CT MICRO 29 288 CT MICRO/T 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOP 34 BDO144P LCP 35 BDO288P LCP 36 BDO432P LCP 37 BDO576P LCP 38 FLOWER POT 39 UH2.5 40 UH3 41 UH4 42 UH5 43 1-1.00" SDR11 HDPE 583 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 46 1-18/14-2 WAY 47 1-18/14-4 WAY 48 EXISTING PIPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 51 GROUND ROD 52 OTE SPLICES 53 NON-OTE SPLICES 54 BM53FA

PREPARED BY

DELTA FIBER ENGINEERING


PREPARED FOR

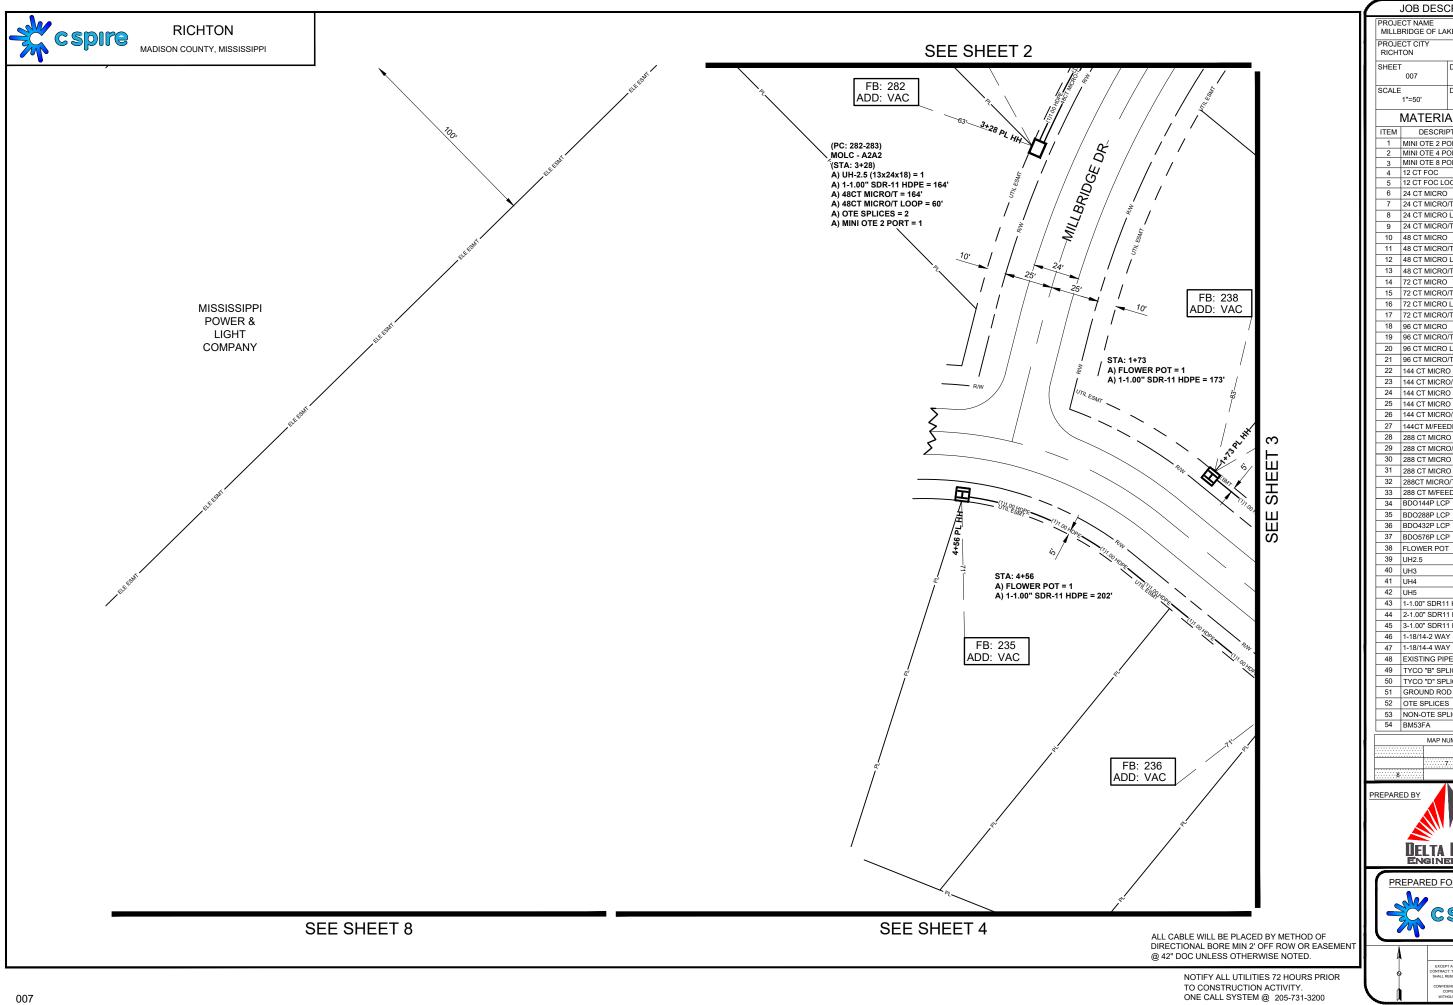

JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE DESCRIPTION CONSTRUCTION DRAWN BY DELTA FIBER MATERIALS LIST DESCRIPTION 1 MINI OTE 2 PORT 2 MINI OTE 4 PORT 3 MINI OTE 8 PORT 5 12 CT FOC LOOP 6 24 CT MICRO 7 24 CT MICRO/T 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 11 48 CT MICRO/T 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 240 15 72 CT MICRO/T 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 19 96 CT MICRO/T 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 23 144 CT MICRO/T 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 28 288 CT MICRO 29 288 CT MICRO/T 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOF 43 1-1.00" SDR11 HDPE 1062 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 48 EXISTING PIPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 51 GROUND ROD 53 NON-OTE SPLICES





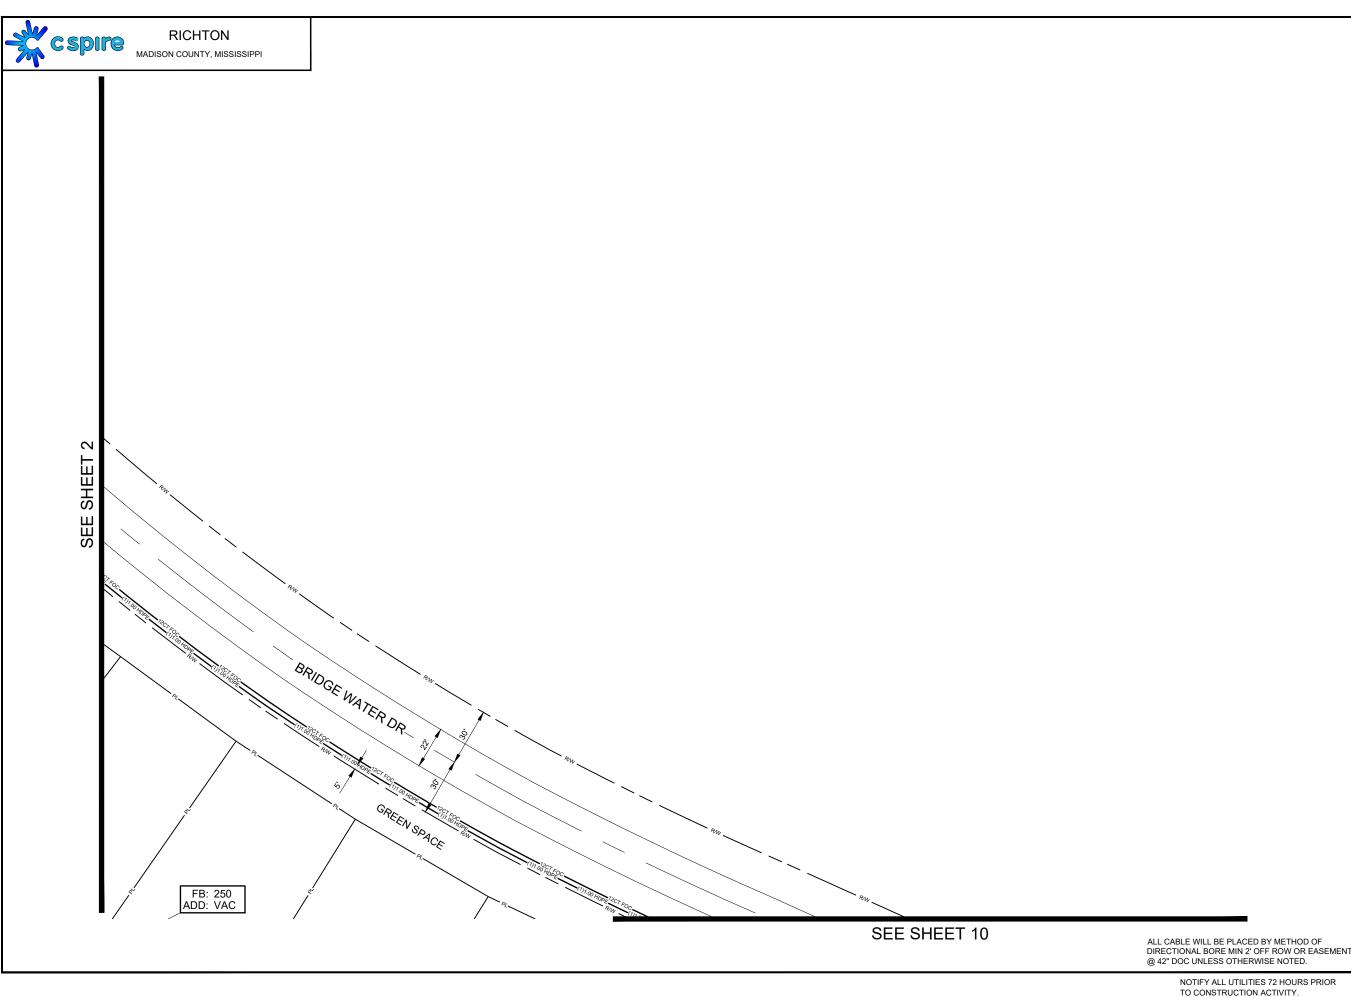


JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE RICHTON SHEET DESCRIPTION CONSTRUCTION 009 SCALE DRAWN BY 1"=50' DELTA FIBER MATERIALS LIST ITEM DESCRIPTION QTY. 1 MINI OTE 2 PORT 3 MINI OTE 8 PORT
4 12 CT FOC
5 12 CT FOC LOOP
6 24 CT MICRO
7 24 CT MICRO/T 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 10 48 CT MICRO 11 48 CT MICRO/T 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 14 72 CT MICRO 15 72 CT MICRO/T 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 18 96 CT MICRO 19 96 CT MICRO/T 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 22 144 CT MICRO 23 144 CT MICRO/T 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 28 288 CT MICRO 29 288 CT MICRO/T 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOP 34 BDO144P LCP 35 BDO288P LCP 36 BDO432P LCP 37 BDO576P LCP 38 FLOWER POT 39 UH2.5 40 UH3 41 UH4 42 UH5 43 1-1.00" SDR11 HDPE 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 46 1-18/14-2 WAY 47 1-18/14-4 WAY 48 EXISTING PIPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 51 GROUND ROD 52 OTE SPLICES 53 NON-OTE SPLICES 54 BM53FA PREPARED BY

DELTA FIBER ENGINEERING



DISCLAIMER

ONE CALL SYSTEM @ 205-731-3200

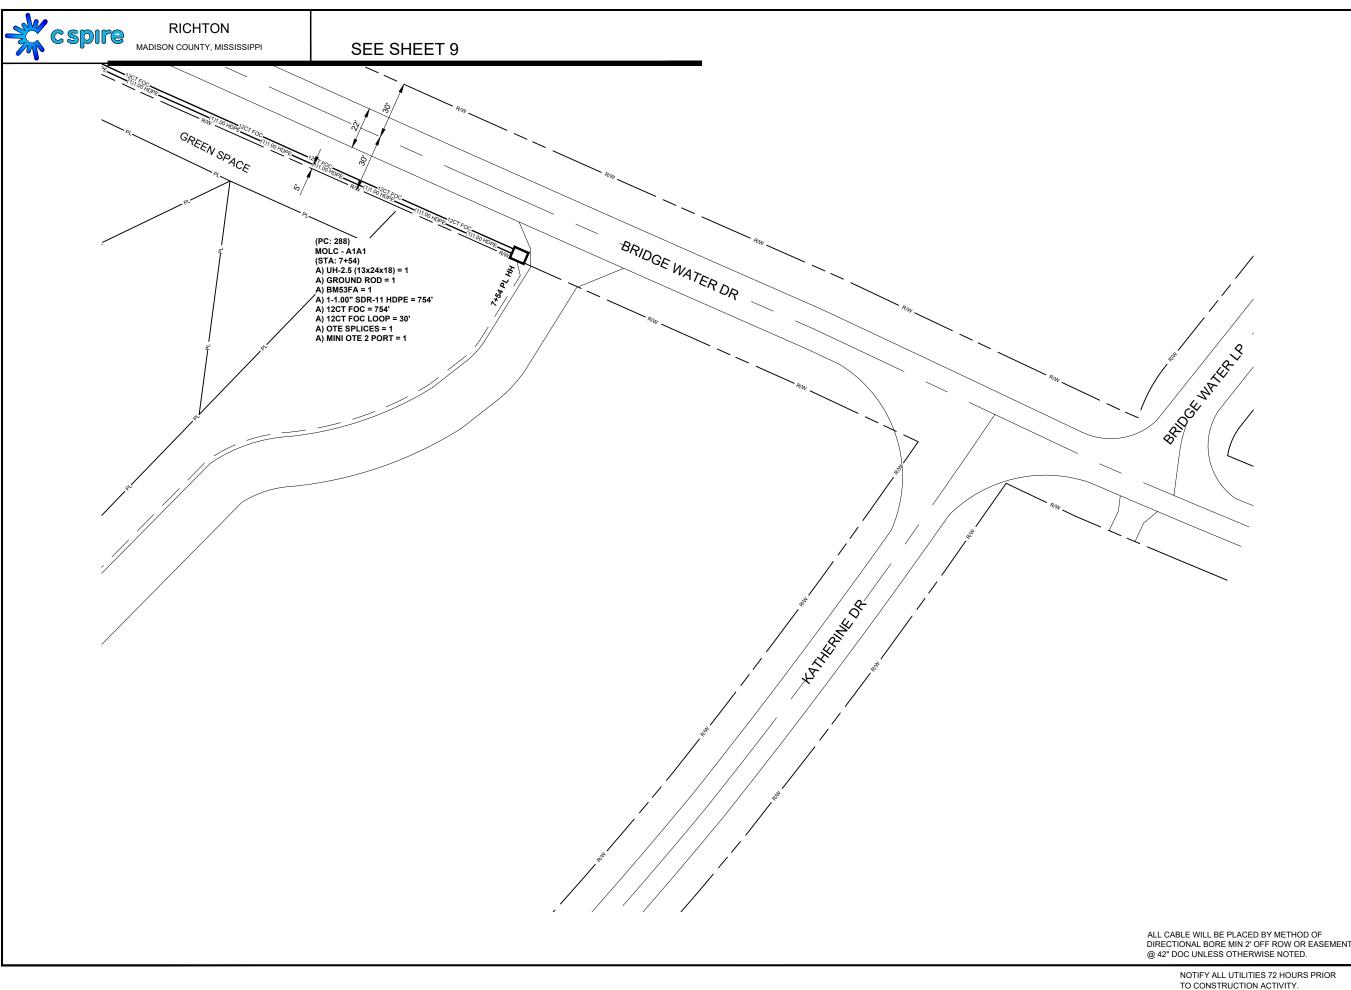

JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE PROJECT CITY RICHTON SHEET DESCRIPTION CONSTRUCTION 010 SCALE DRAWN BY 1"=50' DELTA FIBER MATERIALS LIST ITEM DESCRIPTION QTY. 1 MINI OTE 2 PORT 2 MINI OTE 4 PORT 3 MINI OTE 8 PORT 4 12 CT FOC 5 12 CT FOC LOOP 6 24 CT MICRO 7 24 CT MICRO/T 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 10 48 CT MICRO 11 48 CT MICRO/T 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 14 72 CT MICRO 15 72 CT MICRO/T 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 18 96 CT MICRO 19 96 CT MICRO/T 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 22 144 CT MICRO 23 144 CT MICRO/T 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 28 288 CT MICRO 29 288 CT MICRO/T 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOF 34 BDO144P LCP 35 BDO288P LCP 36 BDO432P LCP 37 BDO576P LCP 38 FLOWER POT 39 UH2.5 40 UH3 41 UH4 42 UH5 43 1-1.00" SDR11 HDPE 754 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 46 1-18/14-2 WAY 47 1-18/14-4 WAY 48 EXISTING PIPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 51 GROUND ROD 52 OTE SPLICES 53 NON-OTE SPLICES 54 BM53FA





DISCLAIMER

EXCEPT AS MAY BE OTHERWISE PROVIDED BY COX.

COX.


EMAIL REMAIN THE PROPERTY OF CERVISE PIBLE

BMALL REMAIN THE PROPERTY OF CERVISE PIBLE

COMPENSION AND SHALL NOT BE REPRODUCED.

WITHOUT SECRED, WITHOUT SERVISION.

ONE CALL SYSTEM @ 205-731-3200

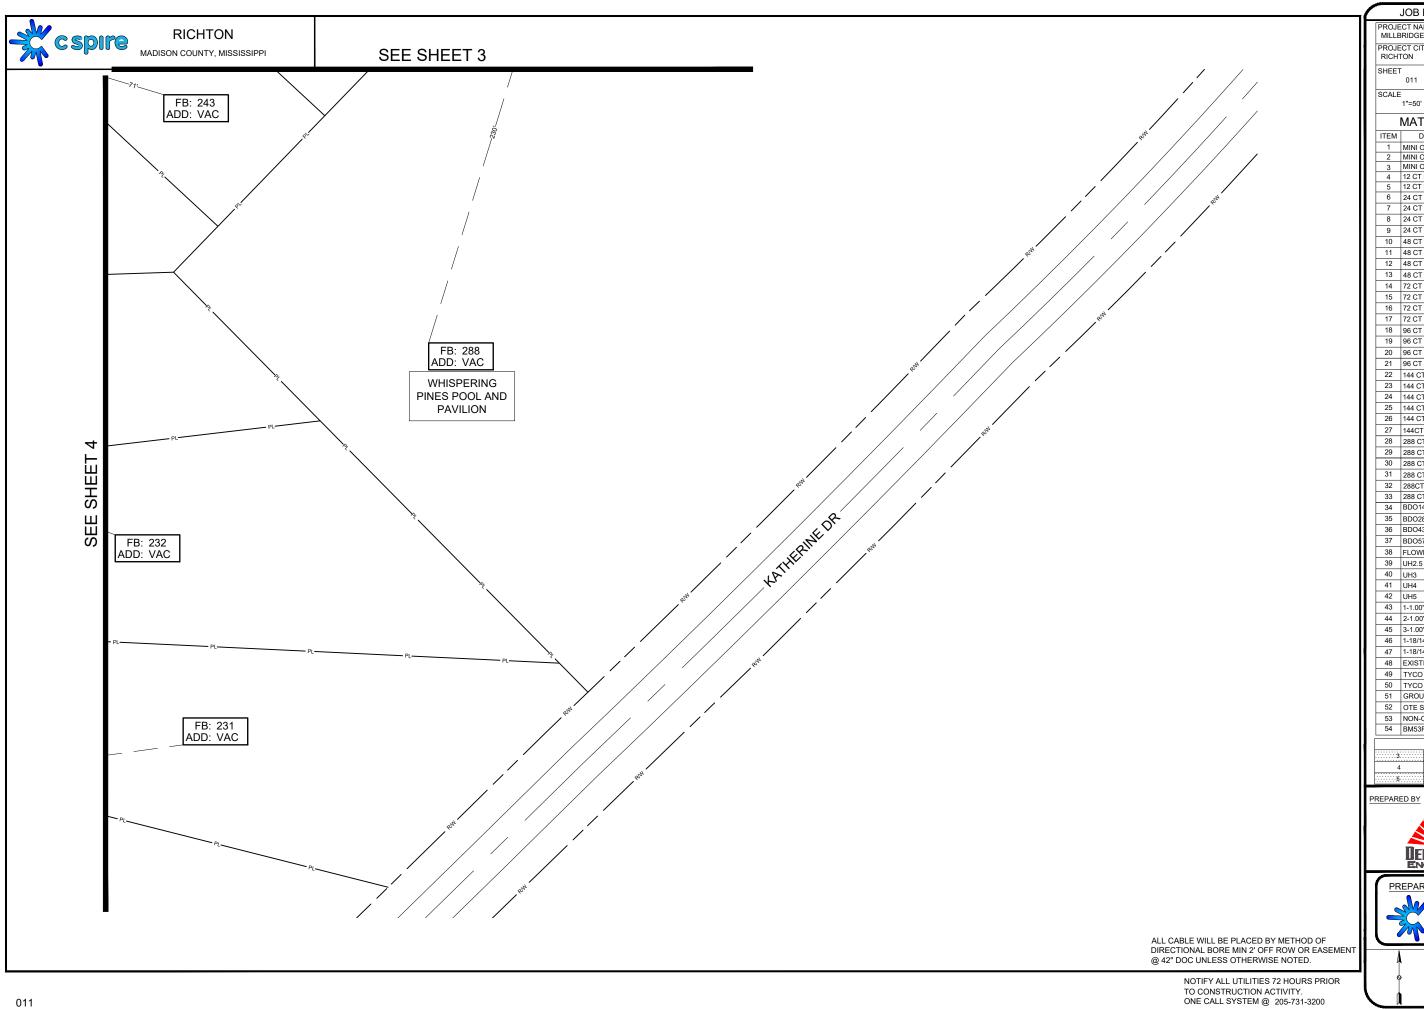

JOB DESCRIPTION MILLBRIDGE OF LAKE CAROLINE PROJECT CITY RICHTON DESCRIPTION CONSTRUCTION 011 DRAWN BY 1"=50' DELTA FIBER MATERIALS LIST ITEM DESCRIPTION QTY. 1 MINI OTE 2 PORT 2 MINI OTE 4 PORT 3 MINI OTE 8 PORT 4 12 CT FOC 5 12 CT FOC LOOP 6 24 CT MICRO 7 24 CT MICRO/T 8 24 CT MICRO LOOP 9 24 CT MICRO/T LOOP 10 48 CT MICRO 11 48 CT MICRO/T 12 48 CT MICRO LOOP 13 48 CT MICRO/T LOOP 14 72 CT MICRO 15 72 CT MICRO/T 16 72 CT MICRO LOOP 17 72 CT MICRO/T LOOP 18 96 CT MICRO 19 96 CT MICRO/T 20 96 CT MICRO LOOP 21 96 CT MICRO/T LOOP 22 144 CT MICRO 23 144 CT MICRO/T 24 144 CT MICRO FEEDER 25 144 CT MICRO LOOP 26 144 CT MICRO/T LOOP 27 144CT M/FEEDER LOOP 28 288 CT MICRO 29 288 CT MICRO/T 30 288 CT MICRO FEEDER 31 288 CT MICRO LOOP 32 288CT MICRO/T LOOP 33 288 CT M/FEEDER LOOP 34 BDO144P LCP 35 BDO288P LCP 36 BDO432P LCP 37 BDO576P LCP 38 FLOWER POT 39 UH2.5 40 UH3 41 UH4 42 UH5 43 1-1.00" SDR11 HDPE 44 2-1.00" SDR11 HDPE 45 3-1.00" SDR11 HDPE 46 1-18/14-2 WAY 47 1-18/14-4 WAY 48 EXISTING PIPE 49 TYCO "B" SPLICE CASE 50 TYCO "D" SPLICE CASE 51 GROUND ROD 52 OTE SPLICES 53 NON-OTE SPLICES 54 BM53FA

DELTA FIBER ENGINEERING

PREPARED FOR